

P-Channel Enhancement Mode MOSFET

1. Product Information

1.1 Features

- ☒ Advanced trench cell design
- ☒ Low Thermal Resistance



1.2 Applications

- ☒ Motor drivers
- ☒ DC - DC Converter

1.3 Quick reference

- ☒ $BV \geq -40\text{ V}$
- ☒ $R_{DS(ON)} \leq 13\text{m}\Omega @ V_{GS} = -10\text{ V}$
- ☒ $P_{tot} \leq 104\text{ W}$
- ☒ $R_{DS(ON)} \leq 22\text{m}\Omega @ V_{GS} = -4.5\text{ V}$
- ☒ $I_D \leq -58\text{ A}$

2. Pin Description

Pin	Description	Simplified Outline	Symbol
1	Gate (G)	 Top View TO-252-3L	
2	Drain (D)		
3	Source (S)		

3. Limiting Values

Symbol	Parameter	Conditions	Min	Max	Unit
V_{DS}	Drain-Source Voltage	$T_C = 25\text{ }^{\circ}\text{C}$	-40	-	V
V_{GS}	Gate-Source Voltage	$T_C = 25\text{ }^{\circ}\text{C}$	-	± 20	V
$I_{D^{*},**}$	Drain Current (DC)	$T_C = 25\text{ }^{\circ}\text{C}, V_{GS} = -10\text{ V}$	-	-58	A
		$T_C = 100\text{ }^{\circ}\text{C}, V_{GS} = -10\text{ V}$	-	-41	A
$I_{DM^{*},**,**}$	Drain Current (Pulsed)	$T_C = 25\text{ }^{\circ}\text{C}, V_{GS} = -10\text{ V}$	-	-120	A
P_{tot}^{*}	Drain power dissipation	$T_C = 25\text{ }^{\circ}\text{C}$	-	104	W
T_{stg}	Storage Temperature		-55	150	$^{\circ}\text{C}$
T_J	Junction Temperature		-	150	$^{\circ}\text{C}$
I_S	Diode Forward Current	$T_C = 25\text{ }^{\circ}\text{C}$	-	-58	A
E_{AS}^{*}	Single Pulsed Avalanche Energy	$V_{DD} = -40\text{ V}, L = 1\text{ mH}$	-	200	mJ
$R_{\theta JA}^{**}$	Thermal Resistance- Junction to Ambient		-	37	$^{\circ}\text{C/W}$
$R_{\theta JC}^{**}$	Thermal Resistance- Junction to Case		-	1.2	$^{\circ}\text{C/W}$

Notes :

- * Surface Mounted on 1 in² pad area, $t \leq 10\text{ sec}$
- ** Pulse width $\leq 10\text{ }\mu\text{s}$, duty cycle $\leq 1\%$
- *** Limited by bonding wire

4. Marking Information

Product Name	Marking
KJ50P04K	50P04 YWWXXX YWW: Date Code

5. Ordering Code

Product Name	Package	Reel Size	Tape width	Quantity	Note
KJ50P04K	TO252	-	-	2500	

Note: KUAJIJIXIN defines “ Green ” as lead-free (RoHS compliant) and halogen free (Br or Cl does not exceed 900 ppm by weight in homogeneous material and total of Br and Cl does not exceed 1500 ppm by weight; Follow IEC 61249-2-21 and IPC / JEDEC J-STD-020C)

6. Electrical Characteristics ($T_C=25^{\circ}\text{C}$ Unless Otherwise Noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Static Characteristics						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} = 0 V, I _{DS} = -250 μA	-40	-	-	V
V _{GS(th)}	Gate Threshold Voltage	V _{DS} = V _{GS} , I _{DS} = -250 μA	-1.5	-	-2.5	V
I _{DSS}	Drain Leakage Current	V _{DS} = -40 V, V _{GS} = 0 V	-	-	-1	μA
I _{GSS}	Gate Leakage Current	V _{GS} = 0 V, V _{GS} = ± 20 V	-	-	±100	nA
R _{DS(ON)} ^a	Drain-Source On-State Resistance	V _{GS} = -10 V, I _D = -15A	-	11	13	mΩ
		V _{GS} = -4.5 V, I _{DS} =-10 A	-	18	22	
Diode Characteristics						
V _{SD} ^a	Diode Forward Voltage	I _{SD} = -15A, V _{GS} = 0 V	-	-	-1.3	V
t _{rr}	Reverse Recovery Time	I _{DS} = -15 A, V _{GS} = 0 V dI _{SD} /dt = 100 A/μs	-	18	-	nS
Q _{rr}	Reverse Recovery Charge		-	12	-	μC
Dynamic Characteristics ^b						
C _{iss}	Input Capacitance	V _{GS} = 0 V, V _{DS} = -20 V Frequency = 1 MHz	-	3375	-	pF
C _{oss}	Output Capacitance		-	233	-	
C _{rss}	Reverse Transfer Capacitance		-	184	-	
t _{d(on)}	Turn-on Delay Time	V _{DS} = -20 V, V _{GEN} = -10 V, R _G = 3.9Ω, R _L = 1.33 Ω, I _D = -15 A	-	9.6	-	nS
t _r	Turn-on Rise Time		-	40	-	
t _{d(off)}	Turn-off Delay Time		-	72	-	
t _f	Turn-off Fall Time		-	57	-	
Gate Charge Characteristics ^b						
Q _g	Total Gate Charge	V _{DS} = -20 V, V _{GS} = -10 V, I _{DS} = -15 A	-	55	-	nC
Q _{gs}	Gate-Source Charge		-	15	-	
Q _{gd}	Gate-Drain Charge		-	7.4	-	

Notes :

a: Pulse test; pulse width $\leq 300\text{ }\mu\text{s}$, duty cycle $\leq 2\%$

b: Guaranteed by design, not subject to production testing




快捷通

KJ50P04K


7. Typical Characteristics

Power Capability

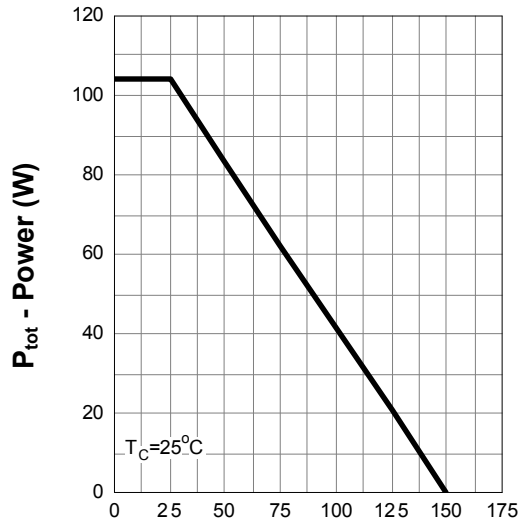


T_j - Junction Temperature (°C)

Current Capability

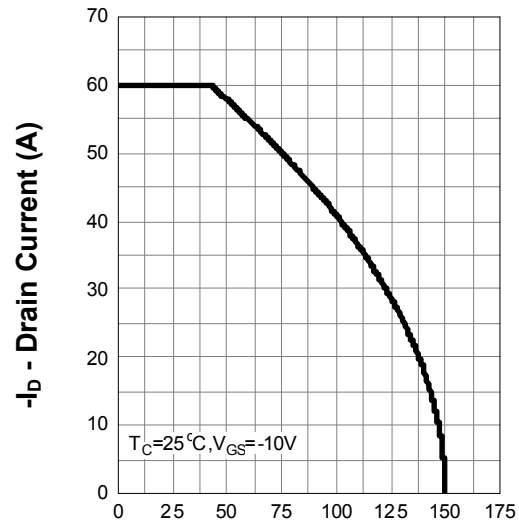


T_j - Junction Temperature (°C)

Safe Operation Area

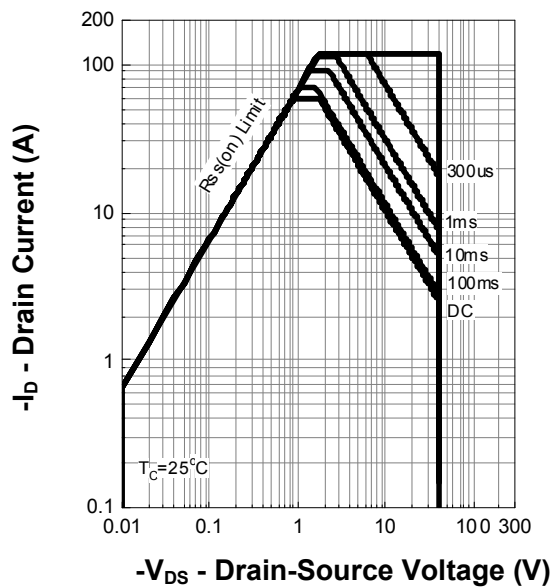


Thermal Transient Impedance

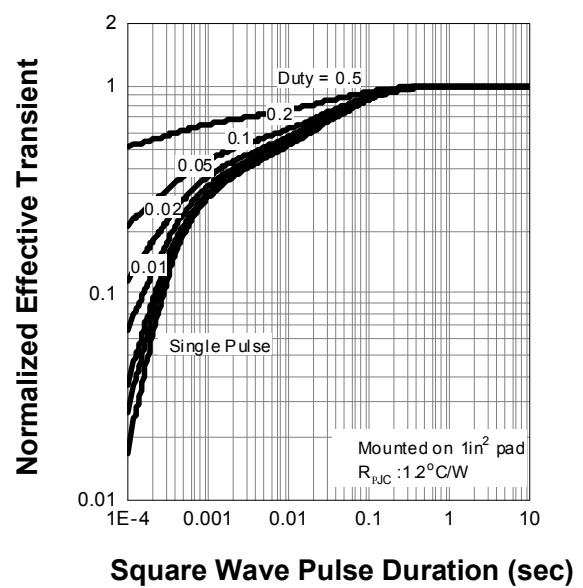


7. Typical Characteristics (cont.)


Output Characteristics

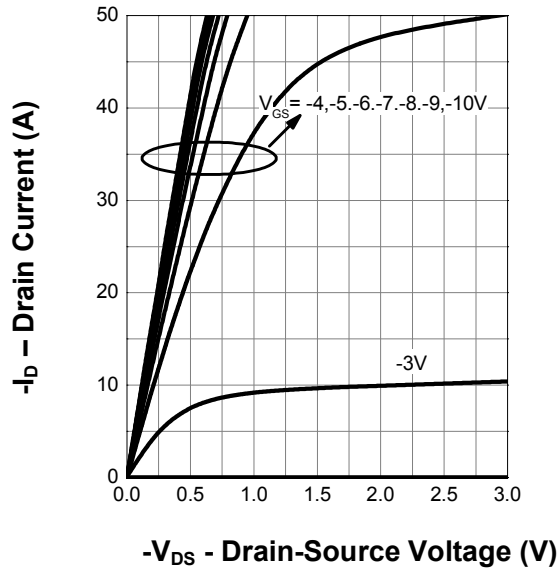


Drain-Source On Resistance

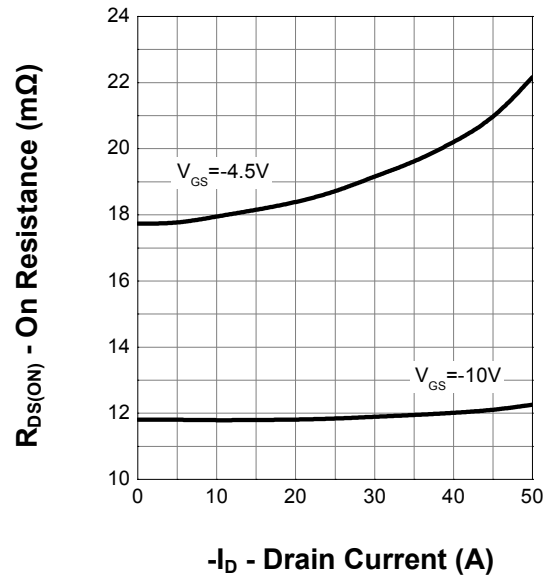

Transfer Characteristics

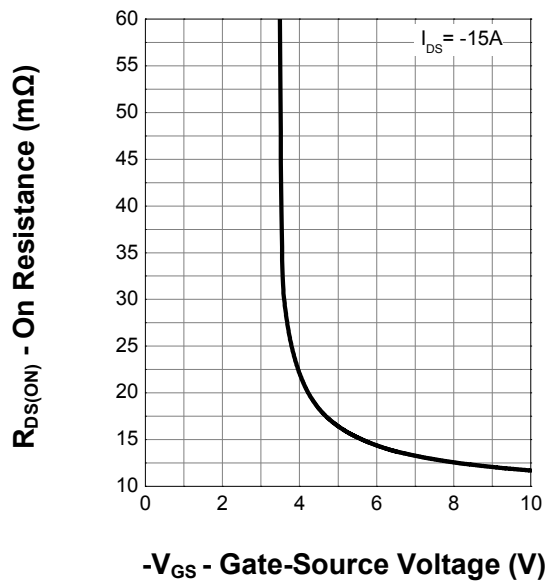


Gate Threshold Voltage

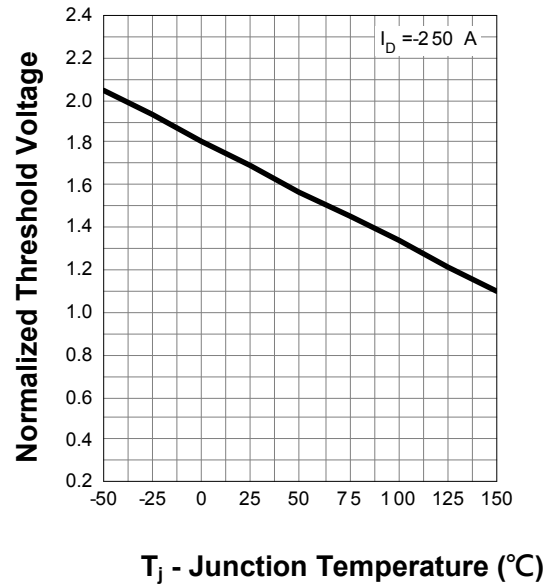


7. Typical Characteristics (cont.)

Drain-Source On Resistance

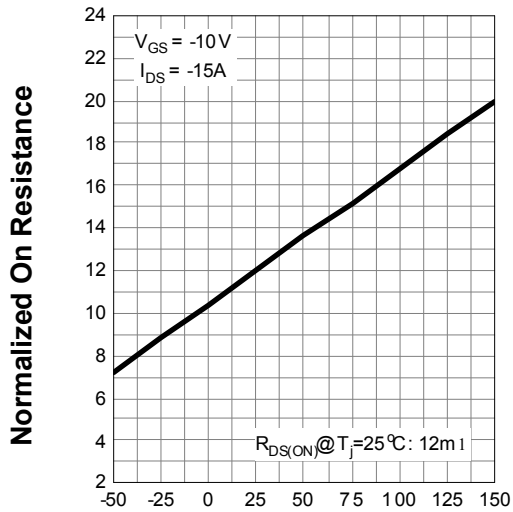


T_j - Junction Temperature ($^{\circ}\text{C}$)

Body Diode Characteristics

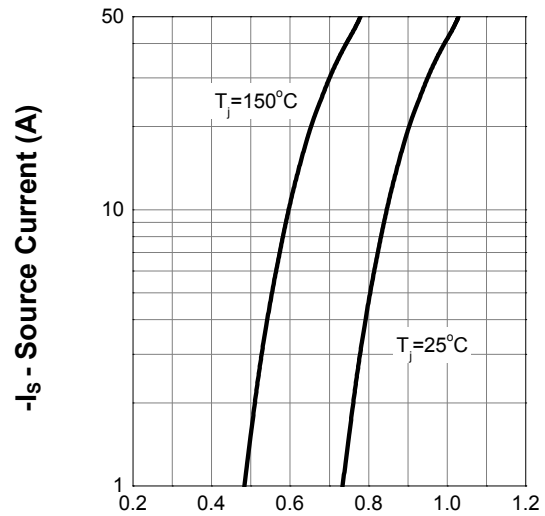


$-V_{SD}$ - Source-Drain Voltage (V)

Capacitance

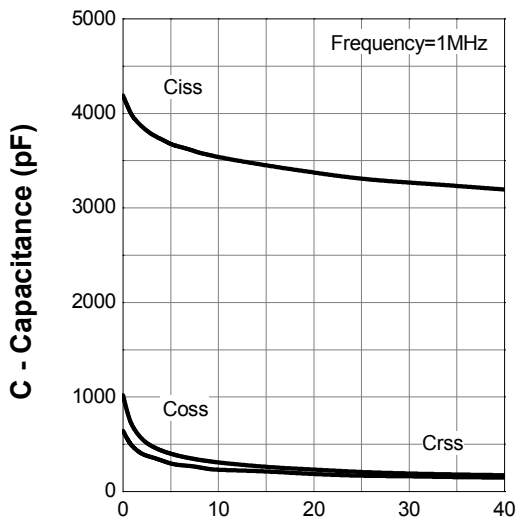

$-V_{DS}$ - Drain-Source Voltage (V)

Gate Charge

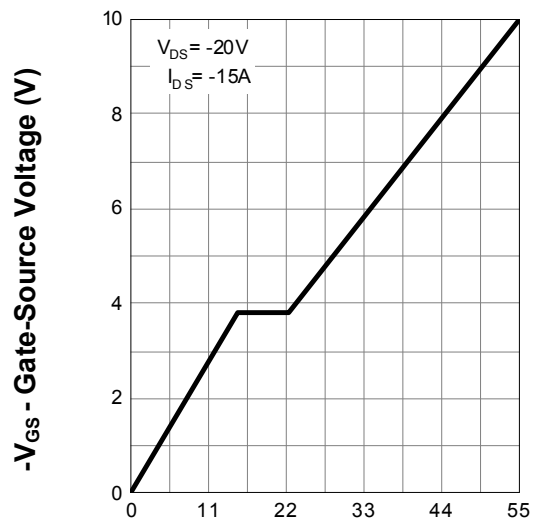

Q_G - Gate Charge (nC)




快捷冠

KJ50P04K

8. Package Dimensions

TO-252-3L

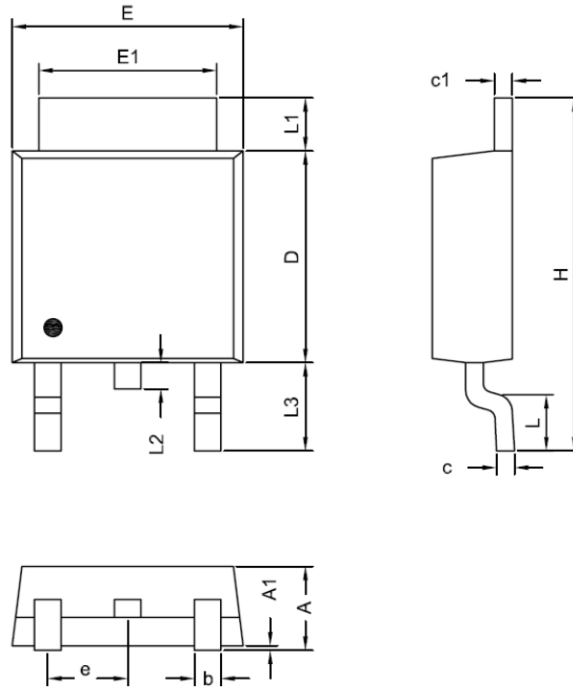

Symbol	Dimensions In Millimeters	
	MIN.	MAX.
A	2.19	2.38
A1	0.02	0.13
D	5.30	6.40
E	6.35	6.80
E1	5.20	5.50
c	0.40	0.60
c1	0.40	0.60
b	0.55	0.85
e	2.30 BCS	
L	1.00	1.80
L1	0.70	1.80
L2	0.70 BCS	
L3	2.40	2.80
H	9.20	10.40