

N-Channel Enhancement Mode MOSFET

1. Product Information

1.1 Features

- ☒ Surface-mounted package
- ☒ Super Trench
- ☒ Advanced trench cell design



1.2 Applications

- ☒ BMS system
- ☒ LCDM appliances
- ☒ High power inverter system

1.3 Quick reference

- ☒ $BV \geq 85\text{ V}$
- ☒ $P_{\text{tot}} \leq 156\text{ W}$
- ☒ $I_D \leq 150\text{ A}$
- ☒ $R_{\text{DS(ON)}} \leq 4.5\text{ m}\Omega @ V_{\text{GS}} = 10\text{ V}$

2. Pin Description

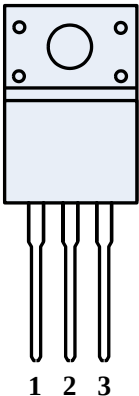Pin	Description	Simplified Outline	Symbol
1	Gate(G)	 1 2 3	
2	Drain(D)		
3	Source(S)		

Top View
TO-220F

3. Limiting Values

Symbol	Parameter	Conditions	Min	Max	Unit
V_{DS}	Drain-Source Voltage	$T_C = 25\text{ }^{\circ}\text{C}$	85	-	V
V_{GS}	Gate-Source Voltage	$T_C = 25\text{ }^{\circ}\text{C}$	-	± 20	V
I_D^{***}	Drain Current (DC)	$T_C = 25\text{ }^{\circ}\text{C}, V_{GS} = 10\text{ V}$	-	150	A
		$T_C = 100\text{ }^{\circ}\text{C}, V_{GS} = 10\text{ V}$	-	102	A
$I_{DM}^{*,***}$	Drain Current (Pulsed)	$T_C = 25\text{ }^{\circ}\text{C}, V_{GS} = 10\text{ V}$	-	480	A
P_{tot}	Drain power dissipation	$T_C = 25\text{ }^{\circ}\text{C}$	-	156	W
T_{stg}	Storage Temperature		-55	150	$^{\circ}\text{C}$
T_J	Junction Temperature		-	150	$^{\circ}\text{C}$
I_S	Continuous-Source Current	$T_C = 25\text{ }^{\circ}\text{C}$	-	150	A
E_{AS}^*	Single Pulsed Avalanche Energy	$L=0.5\text{mH}, I_{as}=30\text{A}, T_J=25\text{ }^{\circ}\text{C}$	-	142	mJ
$R_{\theta JA}^{**}$	Thermal Resistance- Junction to Ambient		-	62.5	$^{\circ}\text{C/W}$
$R_{\theta JC}^{**}$	Thermal Resistance- Junction to Case		-	0.72	

Notes :

- * Pulse width $\leq 300\text{ }\mu\text{s}$, duty cycle $\leq 2\%$
- ** Mounted on Large Heat Sink
- *** Limited by bonding wire

4. Marking Information

Product Name	Marking
KJ042N08CF	042N08 YWWXXX YWW: Date Code

5. Ordering Code

Product Name	Package	Reel Size	Tape width	Quantity	Note
KJ042N08CF	TO-220F			50	

Note: KUAJIEXIN defines “ Green ” as lead-free (RoHS compliant) and halogen free (Br or Cl does not exceed 900 ppm by weight in homogeneous material and total of Br and Cl does not exceed 1500 ppm by weight; Follow IEC 61249-2-21 and IPC / JEDEC J-STD-020C)

6. Electrical Characteristics ($T_A=25^\circ$ Unless Otherwise Noted)





Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Static Characteristics						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} = 0 V, I _{DS} = 250 μA	85	95	-	V
V _{GS(th)}	Gate Threshold Voltage	V _{DS} = V _{GS} , I _{DS} = 250 μA	2.0	-	4.0	V
I _{DSS}	Drain Leakage Current	V _{DS} = 80 V, V _{GS} = 0 V	-	-	1	μA
I _{GSS}	Gate Leakage Current	V _{GS} = 0 V, V _{GS} = ± 20 V	-	-	±100	nA
R _{DS(ON)} ^a	On-State Resistance	V _{GS} = 10 V, I _{DS} = 30 A	-	3.8	4.5	m Ω
Diode Characteristics						
V _{SD} ^a	Diode Forward Voltage	I _{SD} = 20 A, V _{GS} = 0 V	-	-	1.2	V
t _{rr}	Reverse Recovery Time	I _{DS} = 20 A, V _{GS} = 0 V dI _{SD} /dt = 100 A/μs	-	60	-	ns
Q _{rr}	Reverse Recovery Charge		-	156	-	nC
Dynamic Characteristics ^b						
C _{iss}	Input Capacitance	V _{GS} = 0 V, V _{DS} = 40 V Frequency = 1 MHz	-	4021	-	pF
C _{oss}	Output Capacitance		-	637	-	
C _{rss}	Reverse Transfer Capacitance		-	22	-	
t _{d(on)}	Turn-on Delay Time	V _{DS} = 40 V, V _{GEN} = 10 V, R _G = 4.5 Ω, R _L = 2 Ω, I _{DS} = 20 A	-	47	-	ns
t _r	Turn-on Rise Time		-	36	-	
t _{d(off)}	Turn-off Delay Time		-	43	-	
t _f	Turn-off Fall Time		-	20	-	
Gate Charge Characteristics ^b						
Q _g	Total Gate Charge	V _{DS} = 40 V, V _{GS} = 10 V, I _{DS} = 20 A	-	80	-	nC
Q _{gs}	Gate-Source Charge		-	23	-	
Q _{gd}	Gate-Drain Charge		-	24	-	

Notes :





a : Pulse test ; pulse width $\leq 300\text{ }\mu\text{s}$, duty cycle $\leq 2\%$

b : Guaranteed by design, not subject to production testing





7. Typical Characteristics

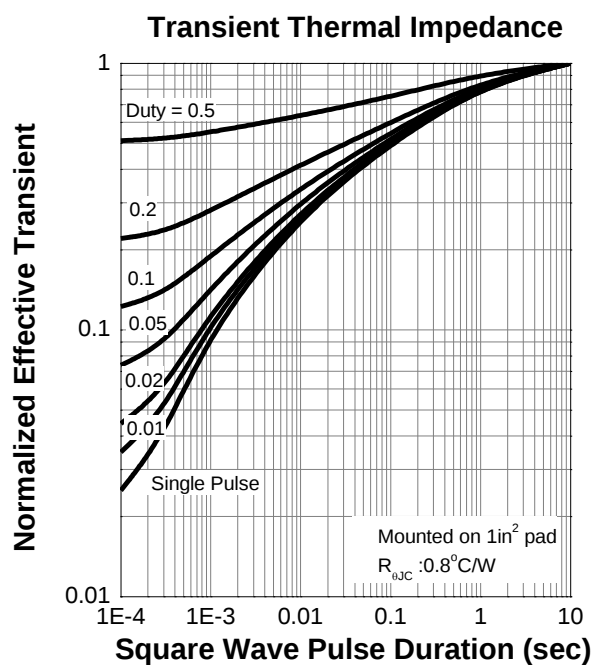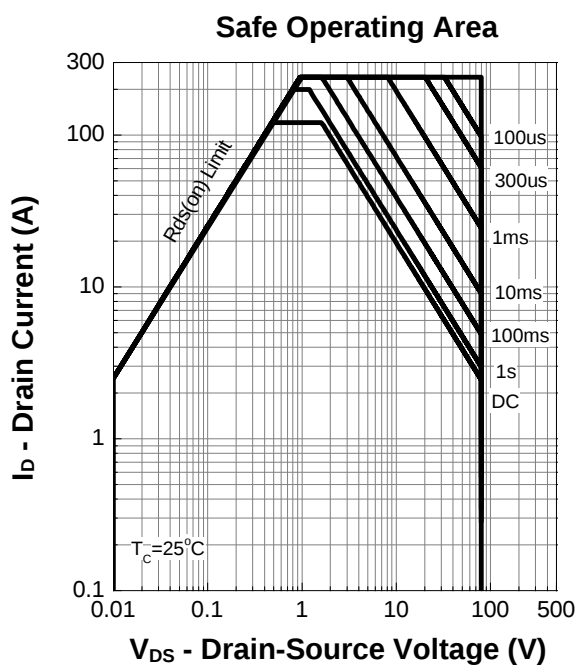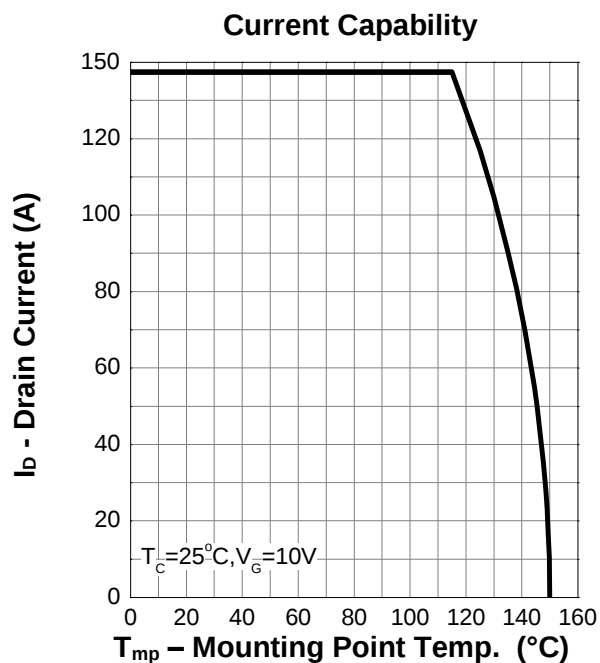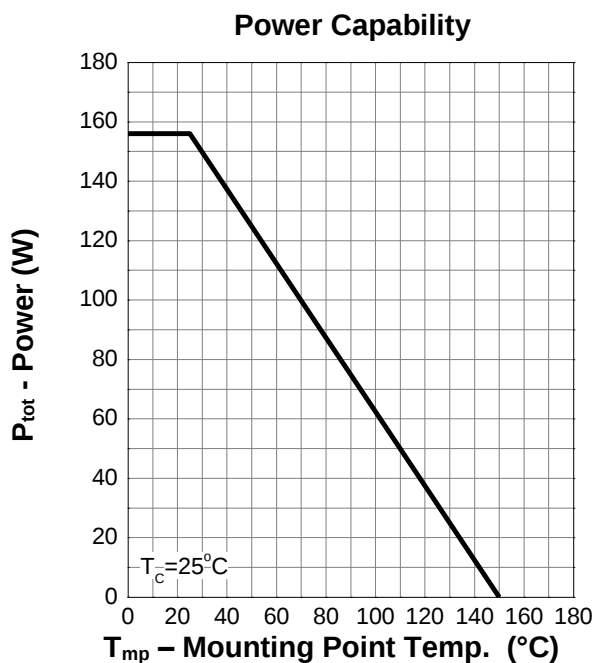

7. Typical Characteristics (cont.)

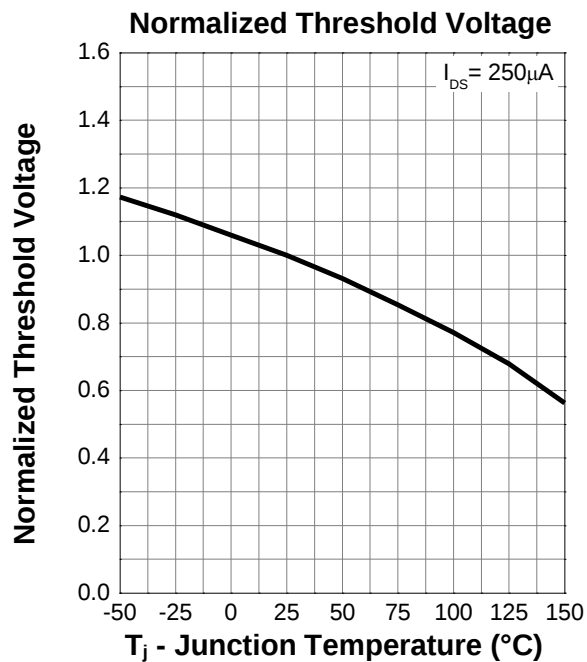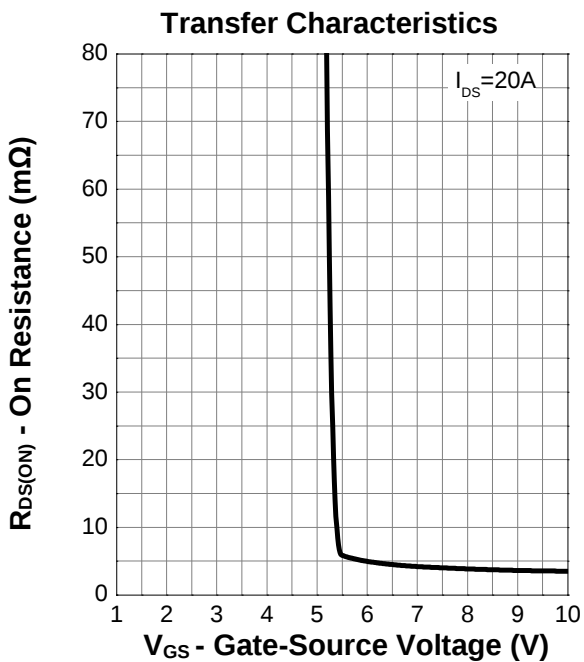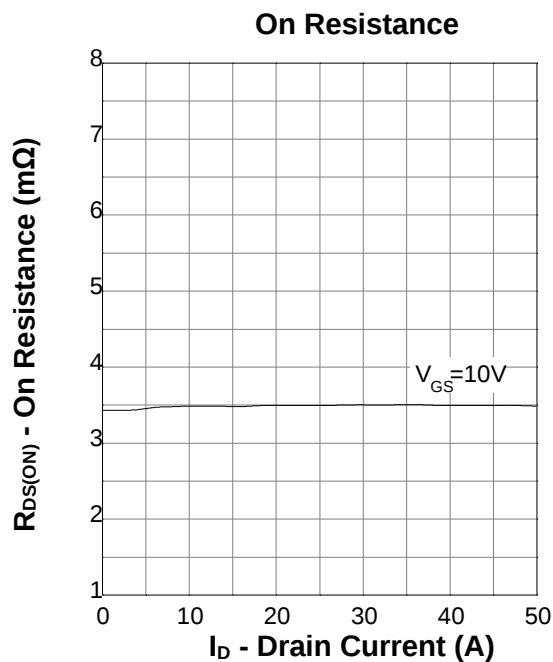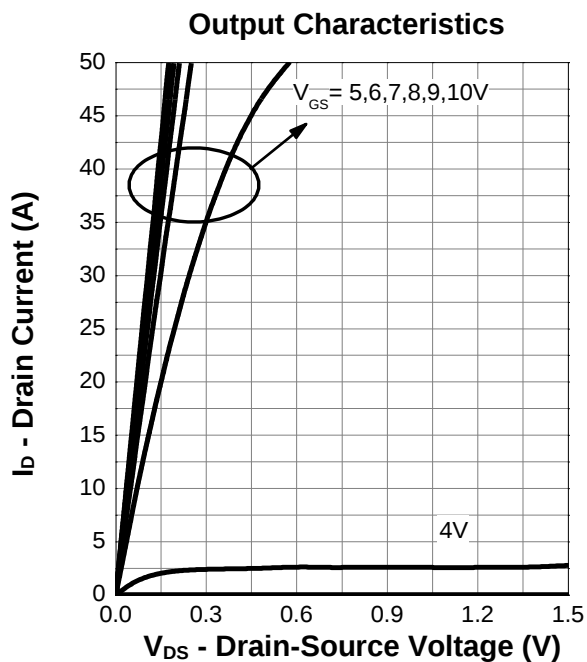


7. Typical Characteristics (cont.)

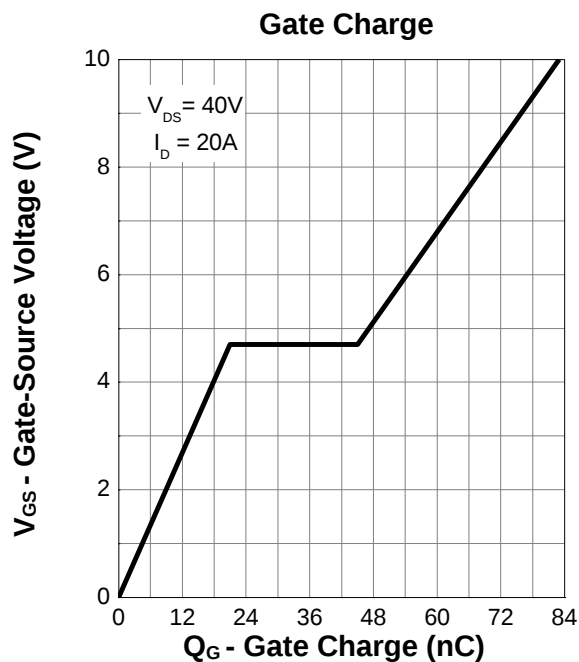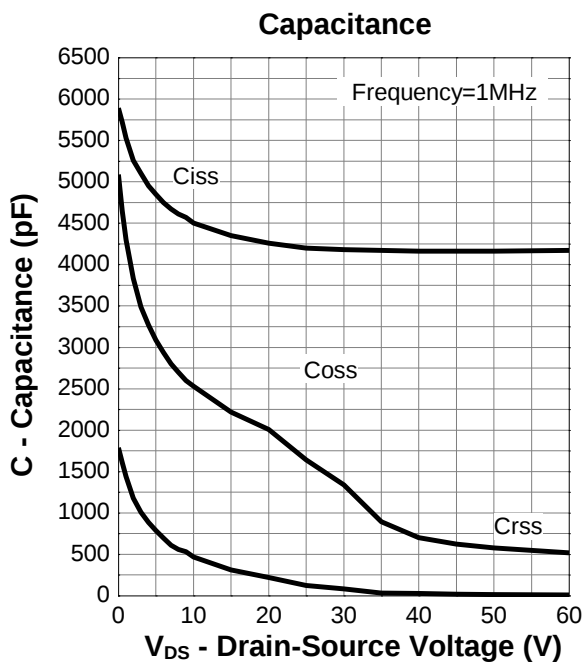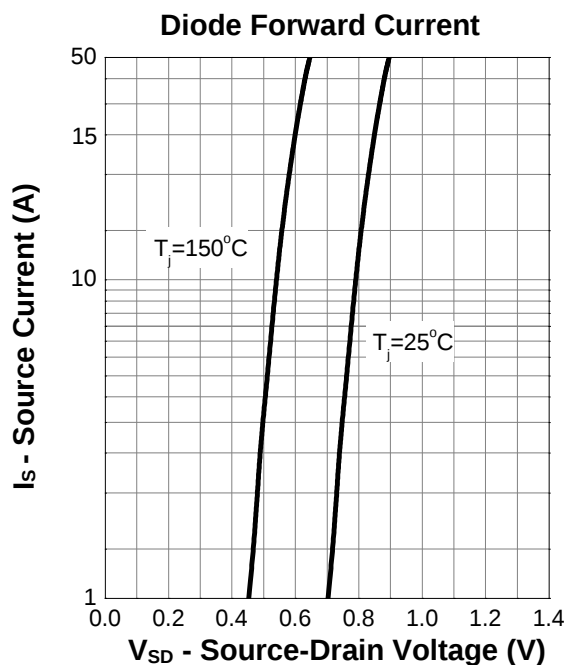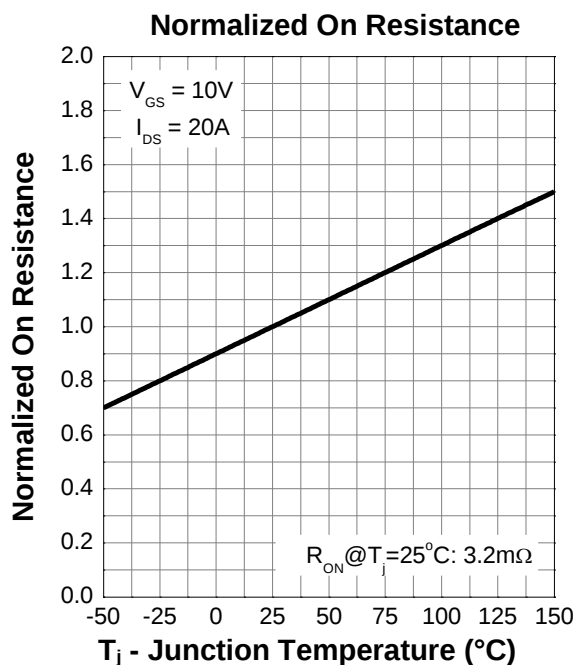

8.Package Dimensions

TO-220F Package

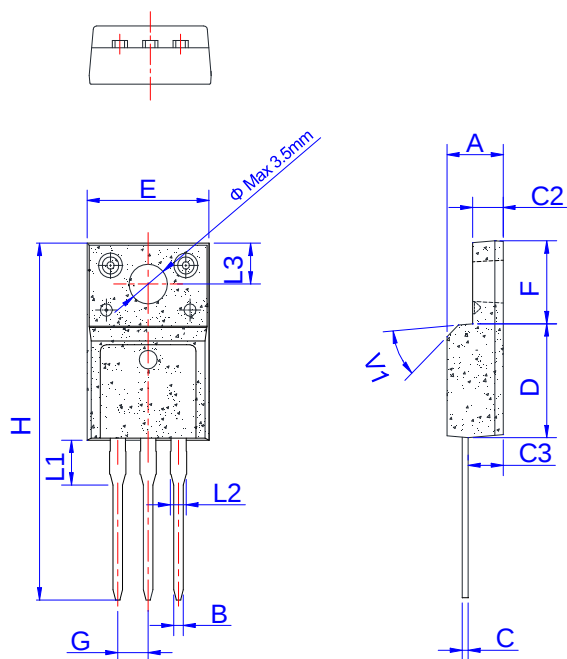

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.50		4.90	0.177		0.193
B	0.74	0.80	0.83	0.029	0.031	0.033
C	0.47		0.65	0.019		0.026
C2	2.45		2.75	0.096		0.108
C3	2.60		3.00	0.102		0.118
D	8.80		9.30	0.346		0.366
E	9.80		10.4	0.386		0.410
F	6.40		6.80	0.252		0.268
G		2.54			0.1	
H	28.0		29.8	1.102		1.173
L1		3.63			0.143	
L2	1.14		1.70	0.045		0.067
L3		3.30			0.130	
V1		45°			45°	