

Dual N-Channel Enhancement Mode MOSFET

1. Product Information

1.1 Features

- ☒ Surface-mounted package
- ☒ Super Trench
- ☒ Advanced trench cell design



1.2 Applications

- ☒ LCD TV appliances
- ☒ LCDM appliances
- ☒ High power inverter system

1.3 Quick reference

- ☒ $BV \geq 40\text{ V}$
- ☒ $P_{tot} \leq 20.8\text{ W}$
- ☒ $I_D \leq 50\text{ A}$
- ☒ $R_{DS(ON)} \leq 8.5\text{ m}\Omega @ V_{GS} = 10\text{ V}$
- ☒ $R_{DS(ON)} \leq 15\text{ m}\Omega @ V_{GS} = 4.5\text{ V}$

2. Pin Description

Pin	Description	Simplified Outline	Symbol
1	Source(S1)	 Top View PDFN3.3x3.3-8L	
2	Gate(G1)		
3	Source(S2)		
4	Gate(G2)		
5,6	Drain(D2)		
7,8	Drain(D1)		

3. Limiting Values

Symbol	Parameter	Conditions	Min	Max	Unit
V_{DS}	Drain-Source Voltage	$T_C = 25\text{ }^{\circ}\text{C}$	40	-	V
V_{GS}	Gate-Source Voltage	$T_C = 25\text{ }^{\circ}\text{C}$	-	± 20	V
I_D^*	Drain Current	$T_C = 25\text{ }^{\circ}\text{C}, V_{GS} = 10\text{ V}$	-	50	A
I_D^*	Drain Current	$T_C = 100\text{ }^{\circ}\text{C}, V_{GS} = 10\text{ V}$	-	33	A
$I_{DM}^{*,**,***}$	Pulsed Source Current	$T_C = 25\text{ }^{\circ}\text{C}, V_{GS} = 10\text{ V}$	-	144	A
P_{tot}	Total Power Dissipation	$T_C = 25\text{ }^{\circ}\text{C}$	-	20.8	W
T_{stg}	Storage Temperature		- 55	150	$^{\circ}\text{C}$
T_J	Junction Temperature		-	150	$^{\circ}\text{C}$
I_S	Diode Forward Current	$T_C = 25\text{ }^{\circ}\text{C}$	-	50	A
E_{AS}	Single Pulsed Avalanche Energy	$V_{DD} = 40\text{ V}, L = 1.0\text{ mH}$	-	91	mJ
$R_{\theta JA}^*$	Thermal Resistance- Junction to Ambient		-	62.5	$^{\circ}\text{C/W}$
$R_{\theta JC}^*$	Thermal Resistance- Junction to Case		-	6	

Notes:

* Surface Mounted on 1 in² pad area, $t \leq 10\text{ sec}$

** Pulse width $\leq 300\text{ }\mu\text{s}$, duty cycle $\leq 2\%$

*** Limited by bonding wire

4. Marking Information

Product Name	Marking
KJ0804QD	0804D YWWXXX YWWXXX: Date Code

5. Ordering Code

Product Name	Package	Reel Size	Tape width	Quantity	Note
KJ0804QD	PDFN3.3x3.3-8L	-	-	5000	

Note: KUAJIEXIN defines “Green” as lead-free (RoHS compliant) and halogen free (Br or Cl does not exceed 900 ppm by weight in homogeneous material and total of Br and Cl does not exceed 1500 ppm by weight; Follow IEC 61249-2-21 and IPC / JEDEC J-STD-020C)

6. Electrical Characteristics ($T_A=25^{\circ}\text{C}$ Unless Otherwise Noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Static Characteristics						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} = 0 V, I _{DS} = 250 μA	40	-	-	V
V _{GS(th)}	Gate Threshold Voltage	V _{DS} = V _{GS} , I _{DS} = 250 μA	1.3	-	2.5	V
I _{DSS}	Drain Leakage Current	V _{DS} = 36 V, V _{GS} = 0 V	-	-	1	μA
I _{GSS}	Gate Leakage Current	V _{GS} = 0 V, V _{GS} = ± 20 V	-	-	±10	uA
R _{DS(ON)} ^a	On-State Resistance	V _{GS} = 10 V, I _{DS} = 10 A	-	7.5	8.5	m Ω
		V _{GS} = 4.5 V, I _{DS} = 5 A	-	13	15	
Diode Characteristics						
V _{SD} ^a	Diode Forward Voltage	I _{SD} = 10 A, V _{GS} = 0 V	-	-	1.3	V
t _{rr}	Reverse Recovery Time	I _{DS} = 10 A, V _{GS} = 0 V dI _{SD} /dt = 100 A/μs	-	19	-	nS
Q _{rr}	Reverse Recovery Charge		-	10	-	nC
Dynamic Characteristics ^b						
C _{iss}	Input Capacitance	V _{GS} = 0 V, V _{DS} = 22.5 V Frequency = 1 MHz	-	658	-	pF
C _{oss}	Output Capacitance		-	142	-	
C _{rss}	Reverse Transfer Capacitance		-	9	-	
t _{d(on)}	Turn-on Delay Time	V _{DS} = 22.5 V, V _{GEN} = 10 V, R _G = 3.9 Ω, R _L = 2.25Ω, I _{DS} = 10 A	-	6	-	nS
t _r	Turn-on Rise Time		-	23	-	
t _{d(off)}	Turn-off Delay Time		-	17	-	
t _f	Turn-off Fall Time		-	19	-	
Gate Charge Characteristics ^b						
Q _g	Total Gate Charge	V _{DS} =22.5 V, V _{GS} = 10 V, I _{DS} = 10 A	-	15	-	nC
Q _{gs}	Gate-Source Charge		-	3	-	
Q _{gd}	Gate-Drain Charge		-	3.1	-	

Notes :

a : Pulse test ; pulse width $\leq 300\text{ }\mu\text{s}$, duty cycle $\leq 2\%$

b : Guaranteed by design, not subject to production testing




快捷


KJ0804QD

7. Typical Characteristics


Power Capability

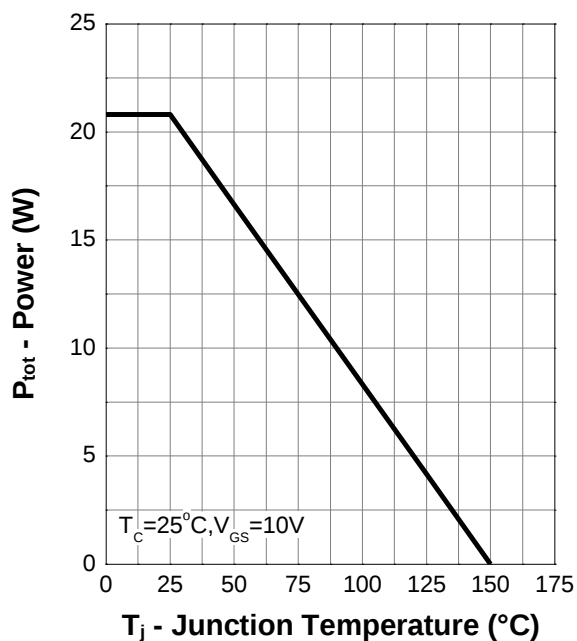


Current Capability

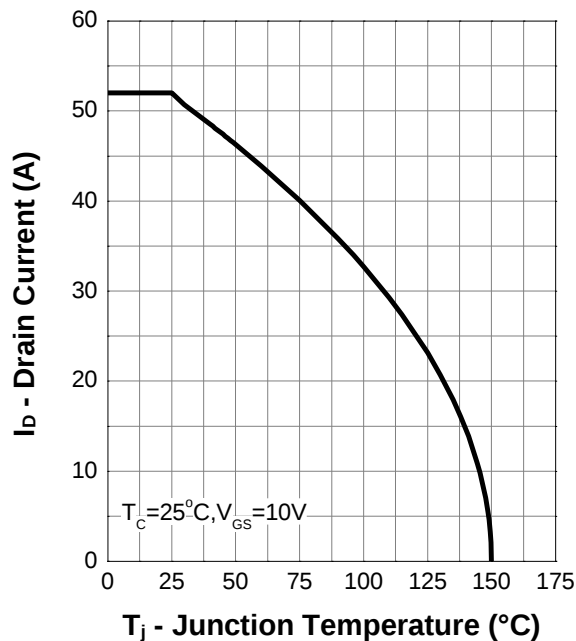

Safe Operating Area

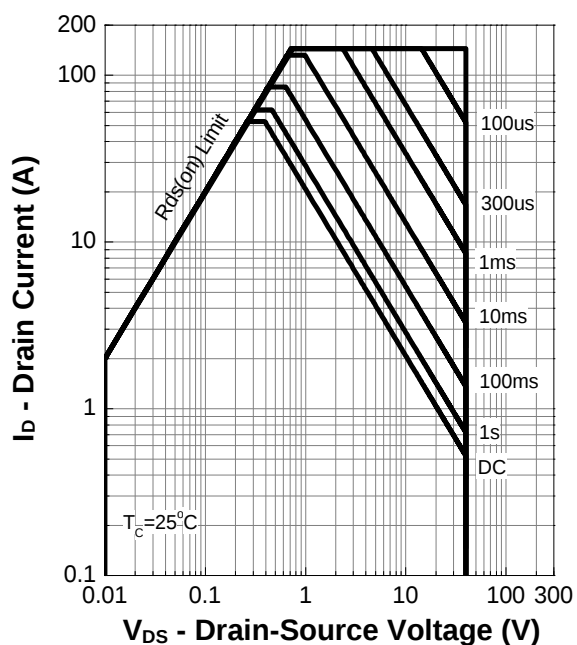

Transient Thermal Impedance




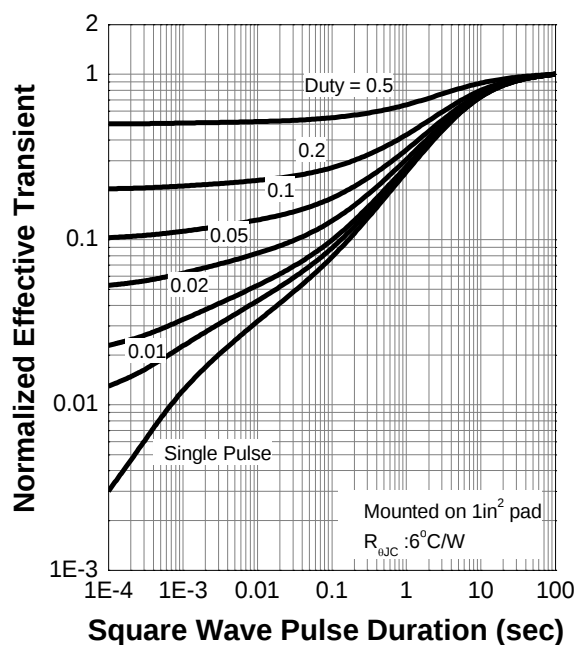




快捷

KJ0804QD

7. Typical Characteristics (Cont.)

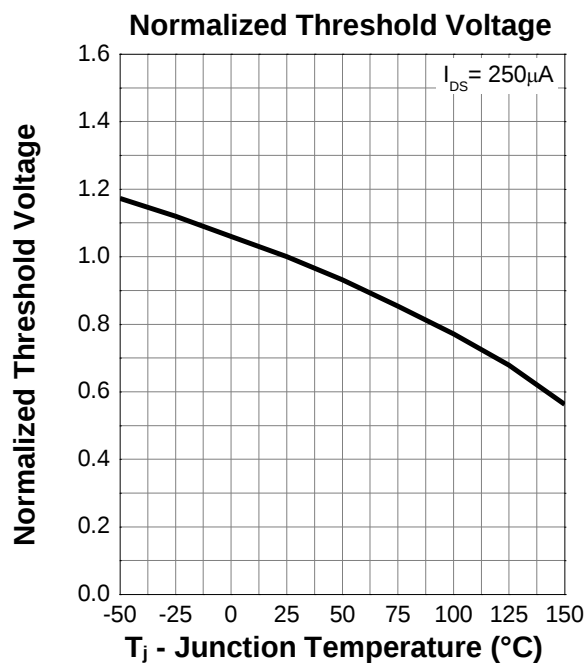
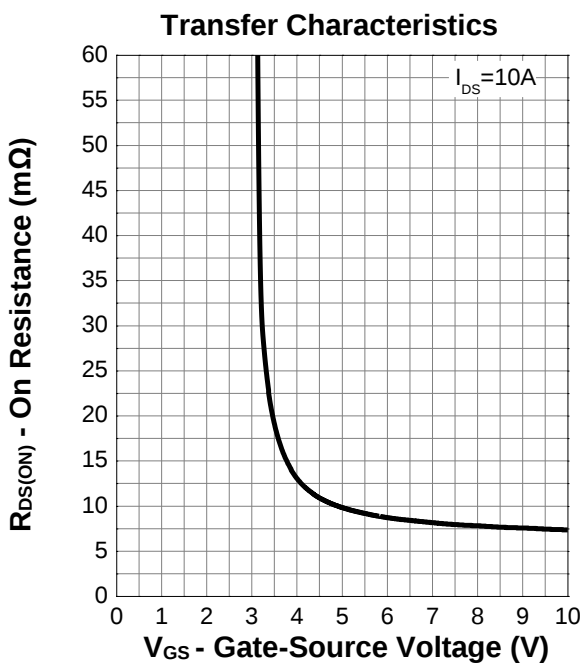
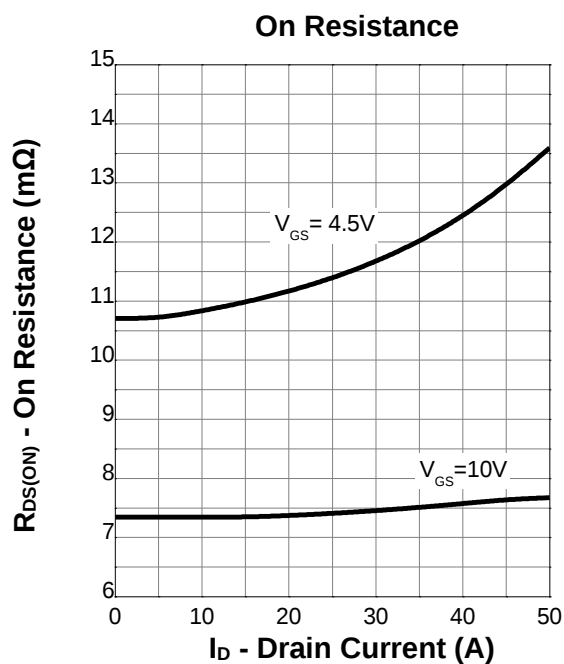
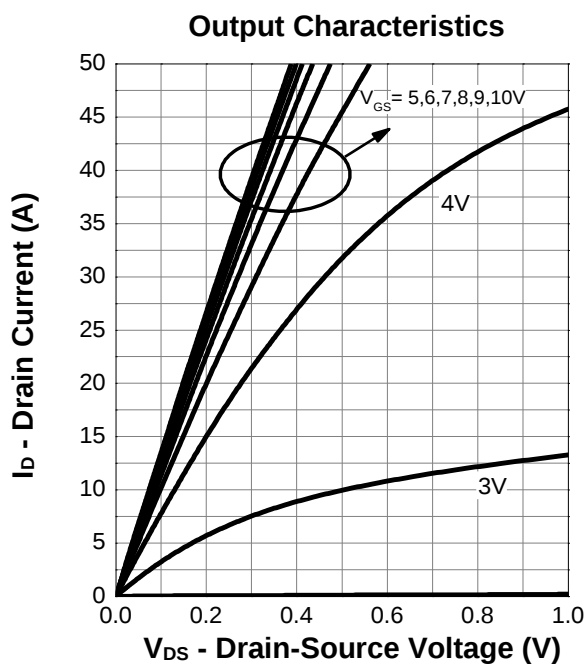




快捷冠

KJ0804QD

7. Typical Characteristics (Cont.)

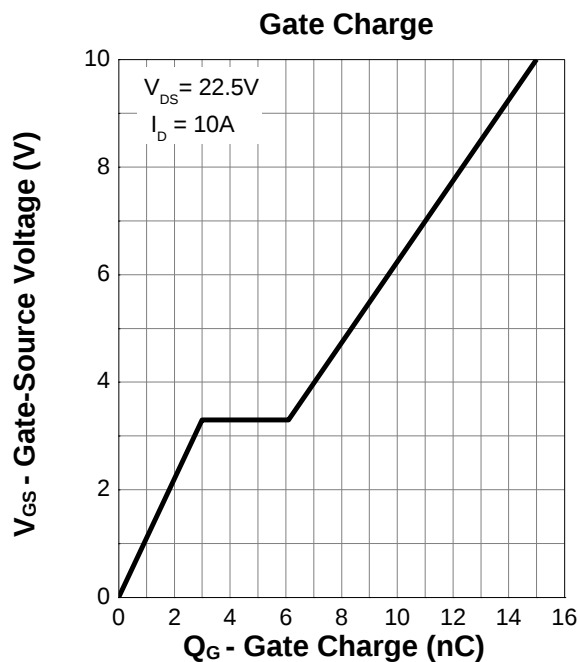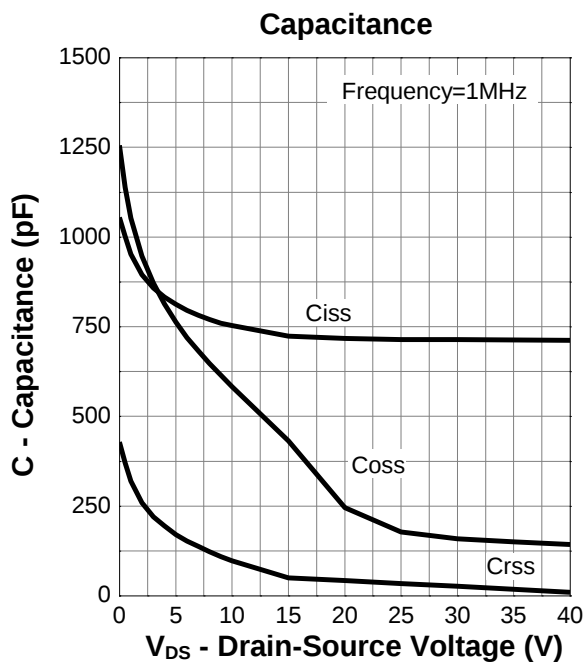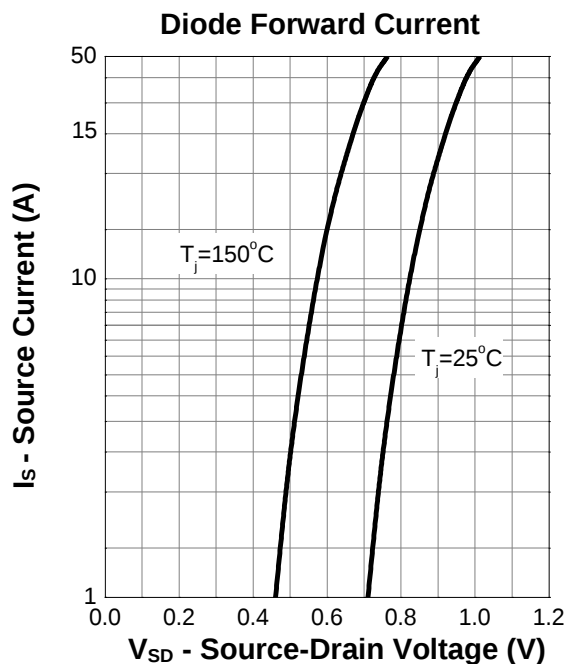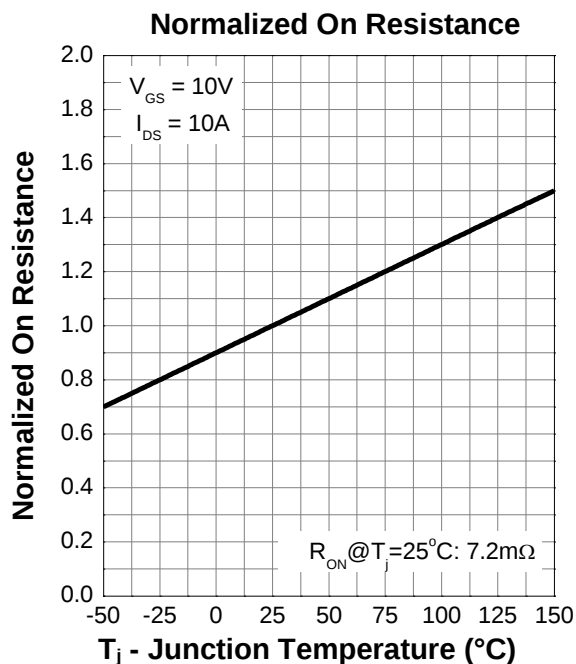




快捷冠

KJ0804QD

8. Package Dimensions

PDFN3.3x3.3(Dual) Package

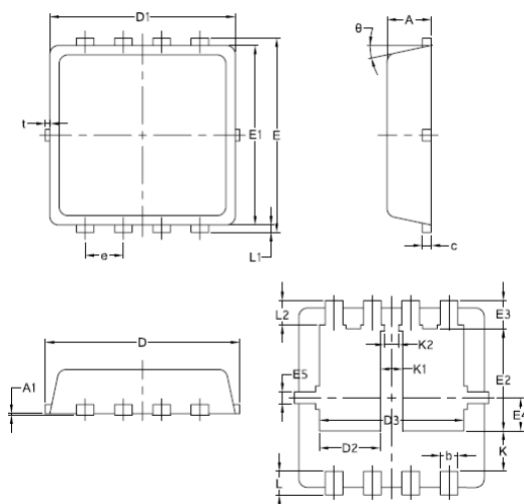

Symbol	Dimensions In Millimeters	
	MIN.	MAX.
A	0.70	0.85
A1	/	0.05
b	0.25	0.39
c	0.14	0.20
D	3.20	3.45
D1	3.05	3.25
D2	0.84	1.24
D3	2.30	2.60
E	3.20	3.40
E1	2.95	3.15
E2	1.60	1.90
E3	0.28	0.65
E4	0.37	0.77
E5	0.10	0.30
e	0.60	0.70
K	0.50	0.80
K1	0.30	0.53
K2	0.15	0.35
L	0.30	0.50
L1	0.06	0.20
L2	0.27	0.57
t	0	0.13
θ	10°	14°