

N-Channel Enhancement Mode MOSFET

1. Product Information

1.1 Features

- ✓ Advanced trench cell design
- ✓ Low Thermal Resistance
- ✓ MSL1
- ✓ Tj175°C



1.2 Applications

- ✓ Motor drivers
- ✓ DC-DC Converter

1.3 Quick reference

- ✓ $BV \geq 80V$
- ✓ $R_{DS(ON)} \leq 2.3m\Omega @ V_{GS} = 10V$
- ✓ $P_{tot} \leq 125W$
- ✓ $R_{DS(ON)} \leq 3.5m\Omega @ V_{GS} = 6V$
- ✓ $I_D \leq 176A$

2. Pin Description

Pin	Description	Simplified Outline	Symbol
1,2,3	Source	 Top View PDFN5x6-8L	
4	Gate		
5,6,7,8	Drain		

3. Limiting Values

Symbol	Parameter	Conditions	Min	Max	Unit
V_{DS}	Drain-Source Voltage	$T_C=25^{\circ}\text{C}$	80	-	V
V_{GS}	Gate-Source Voltage	$T_C=25^{\circ}\text{C}$	-	± 20	V
I_D^*	Drain Current (DC)	$T_C=25^{\circ}\text{C}, V_{GS}=10\text{V}$	-	176	A
I_D^*	Drain Current (DC)	$T_C=100^{\circ}\text{C}, V_{GS}=10\text{V}$	-	125	A
$I_{DM}^{*,**}$	Drain Current (Pulsed)	$T_C=25^{\circ}\text{C}, V_{GS}=10\text{V}$	-	704	A
P_{tot}^*	Drain power dissipation	$T_C=25^{\circ}\text{C}$	-	125	W
T_{stg}	Storage Temperature		-55	175	$^{\circ}\text{C}$
T_J	Junction Temperature		-	175	$^{\circ}\text{C}$
I_S	Diode Forward Current	$T_C=25^{\circ}\text{C}$	-	176	A
E_{AS}^*	Single Pulsed Avalanche Energy	$V_{DD}=50\text{V}, L=1.0\text{mH}$	-	512	mJ
$R_{\theta JA}^*$	Thermal Resistance-Junction to Ambient		-	50	$^{\circ}\text{C/W}$
$R_{\theta JC}^*$	Thermal Resistance-Junction to Case		-	2.2	

Notes:

- * Surface Mounted on 1 in² pad area, $t \leq 10$ sec
- ** Pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$
- *** Limited by bonding wire

4. Marking Information

Product Name	Marking
KJ2R0N08G	2R0N08 YWWXXX YWWXXX: Date Code

5. Ordering Code

Product Name	Package	Reel Size	Tape width	Quantity	Note
KJ2R0N08G	PDFN5x6-8L	-	-	5000	

Note: KUAJIEXIN defines “Green” as lead-free (RoHS compliant) and halogen free (Br or Cl does not exceed 900 ppm by weight in homogeneous material and total of Br and Cl does not exceed 1500 ppm by weight; Follow IEC 61249-2-21 and IPC / JEDEC J-STD-020C)





6. Electrical Characteristics (T_A=25℃ Unless Otherwise Noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Static Characteristics						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _{DS} =250μA	80	-	-	V
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _{DS} =250μA	2	-	4	V
I _{DSS}	Drain Leakage Current	V _{DS} =64V, V _{GS} =0V	-	-	1	uA
I _{GSS}	Gate Leakage Current	V _{GS} =±20V, V _{DS} =0V	-	-	±100	uA
R _{DS(ON)} ^a	Drain-Source On-State Resistance	V _{GS} =10V, I _D =50A	-	2.0	2.3	mΩ
		V _{GS} =6V, I _D =30A	-	3.0	3.5	
Diode Characteristics						
V _{SD} ^a	Diode Forward Voltage	I _{SD} =30A, V _{GS} =0V	-	-	1.3	V
t _{rr}	Reverse Recovery Time	I _{DS} =30A, V _{GS} =0V dI _{SD} /dt=100A/μs	-	62	-	ns
Q _{rr}	Reverse Recovery Charge		-	83	-	nC
Dynamic Characteristics ^b						
C _{iss}	Input Capacitance	V _{GS} =0V, V _{DS} =30V Frequency=1MHz	-	5591	-	pF
C _{oss}	Output Capacitance		-	744	-	
C _{rss}	Reverse Transfer Capacitance		-	75	-	
t _{d(on)}	Turn-on Delay Time	V _{DS} =30V, V _{GEN} =10V, R _G =3.9Ω, R _L =0.6Ω, I _{DS} =50A	-	23	-	ns
t _r	Turn-on Rise Time		-	65	-	
t _{d(off)}	Turn-off Delay Time		-	71	-	
t _f	Turn-off Fall Time		-	73	-	
Gate Charge Characteristics ^b						
Q _g	Total Gate Charge	V _{DS} =30V, V _{GS} =10V, I _{DS} =50A	-	101	-	nC
Q _{gs}	Gate-Source Charge		-	28	-	
Q _{gd}	Gate-Drain Charge		-	25	-	





Notes:

- a. Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%
- b. Guaranteed by design, not subject to production testing





7. Typical Characteristics

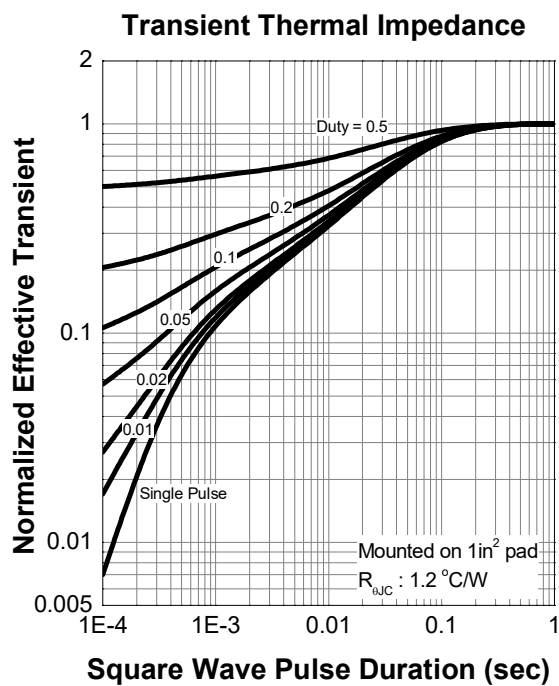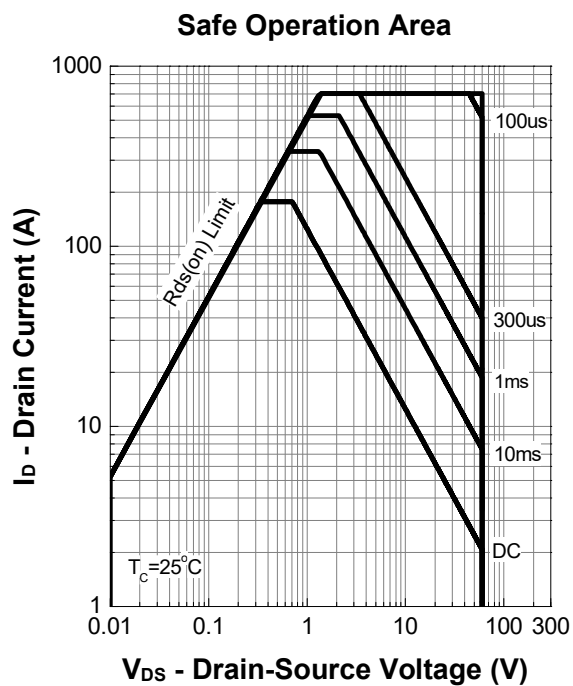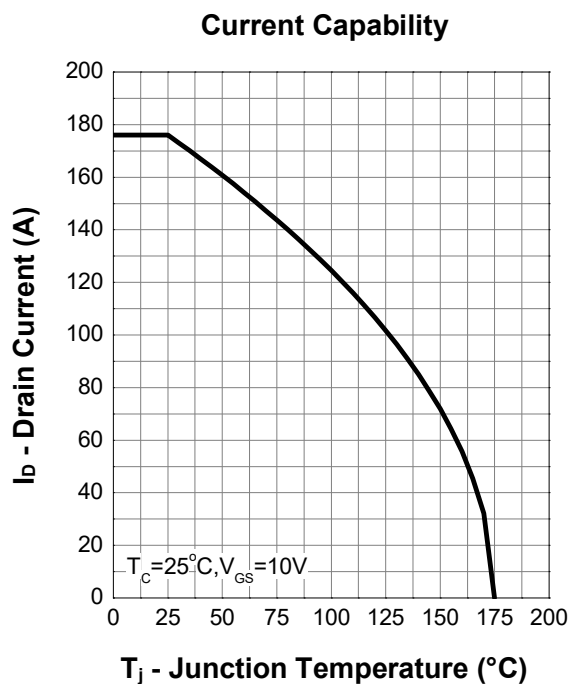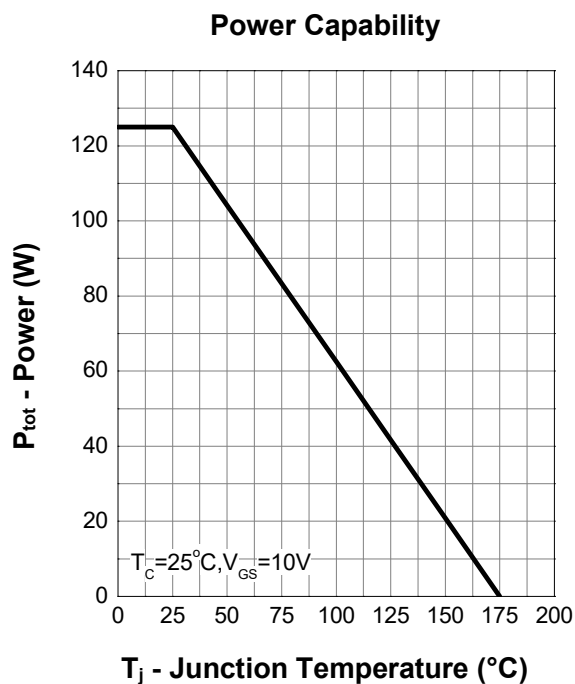

7. Typical Characteristics (cont.)

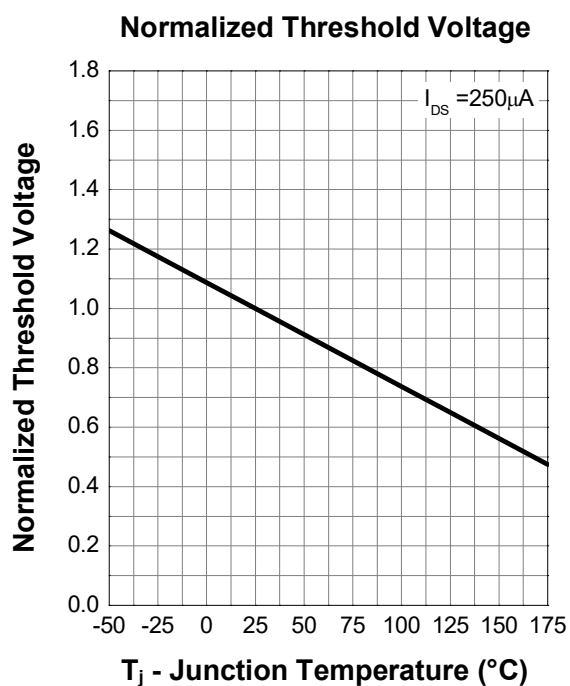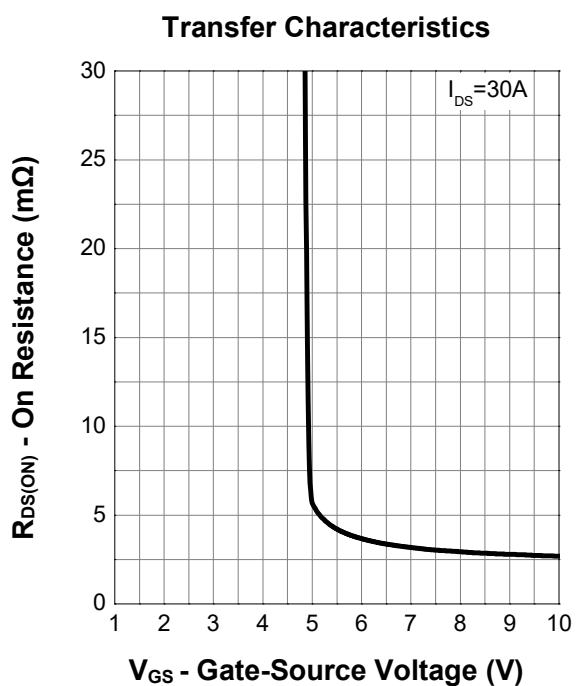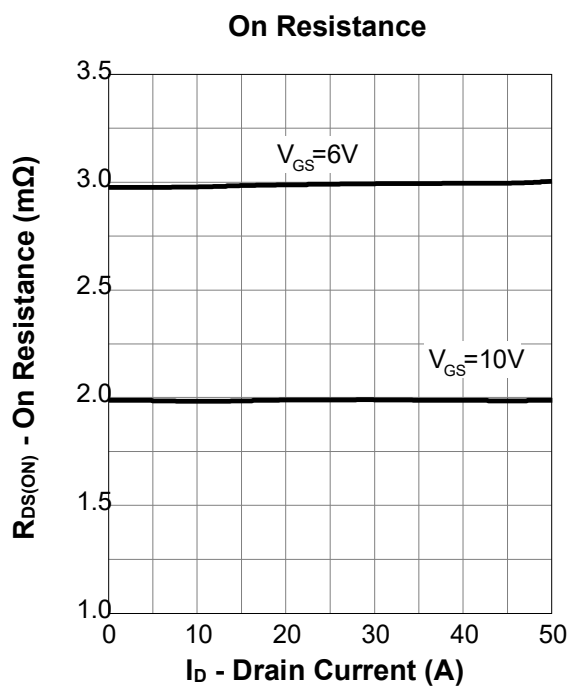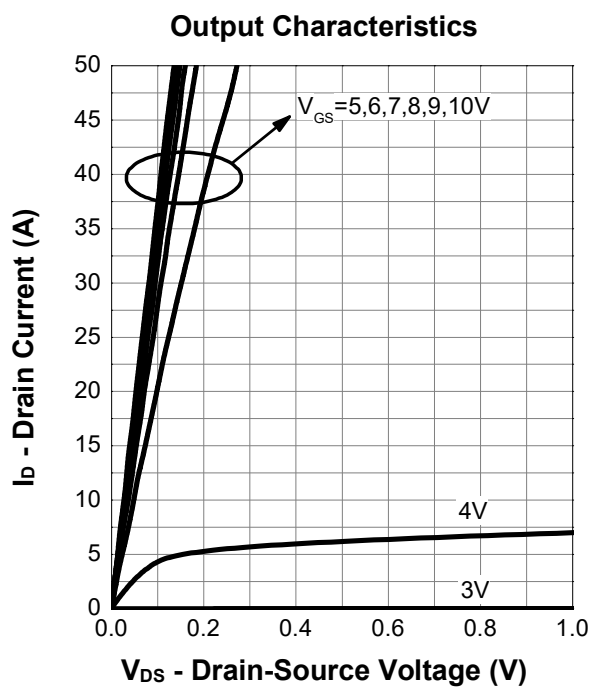


7. Typical Characteristics (cont.)

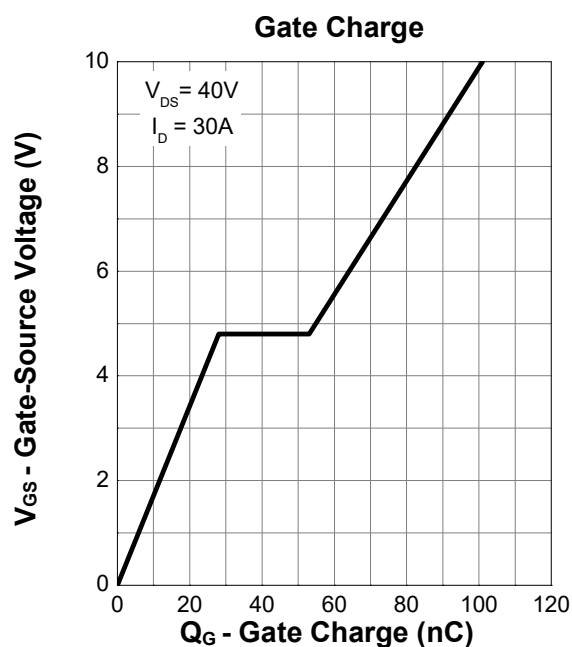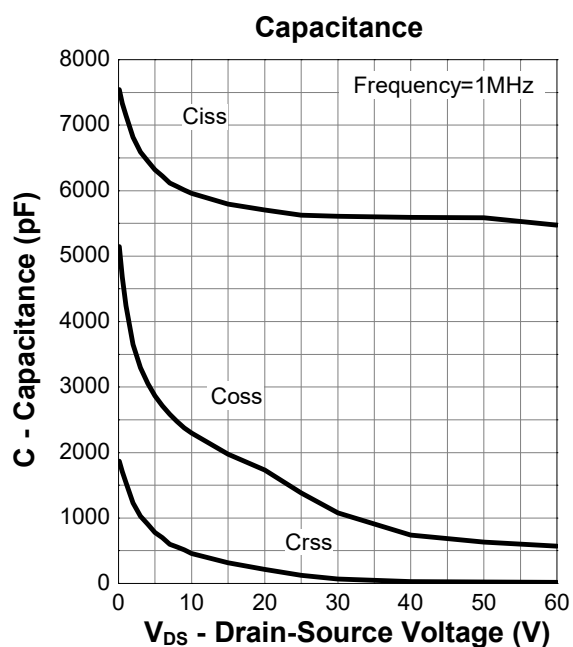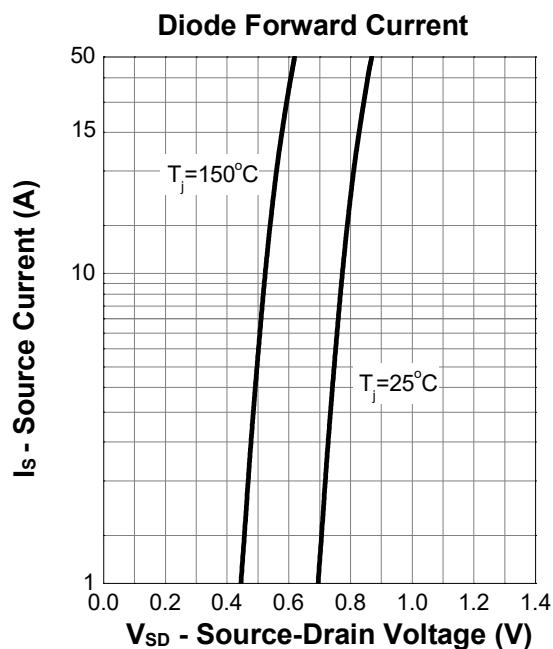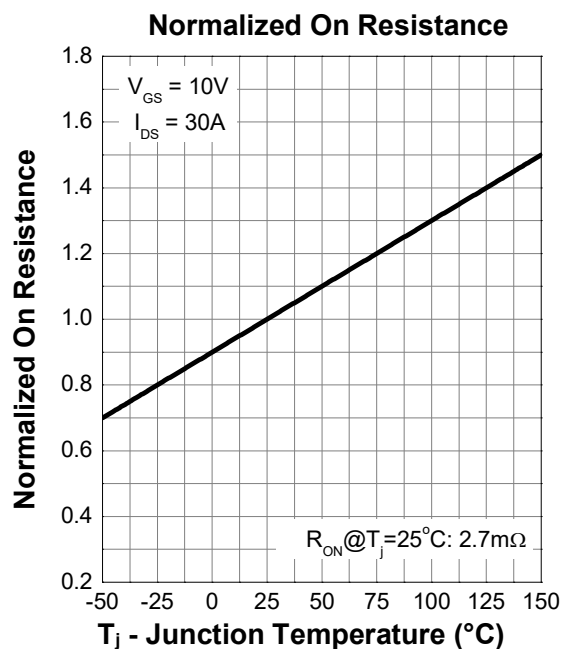

8. Package Dimensions

PDFN5x6-8L Package

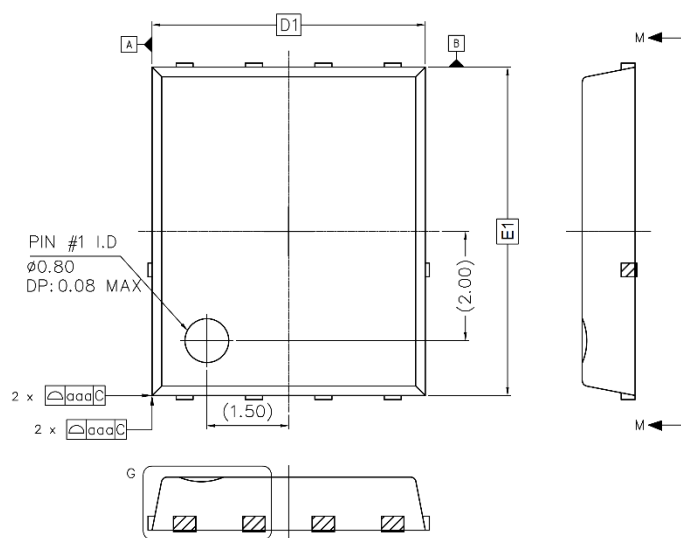

Symbol	Dimensions In Millimeters	
	MIN.	MAX.
A	0.95	1.05
A1	0.00	0.05
A3	0.25 REF	
b	0.31	0.51
b1	0.03	0.13
b2	0.21	0.41
D	5.15 BSC	
D1	5.00 BSC	
D2	3.70	3.90
E	6.15 BSC	
E1	6.00 BSC	
E2	3.56	3.76
e	1.27 BSC	
L	0.51	0.71
M	0.51	0.71
P	10°	12°
aaa	0.10	
bbb	0.10	
ccc	0.10	
ddd	0.05	
eee	0.08	

