

## N-Channel Enhancement Mode MOSFET

### 1. Product Information

#### 1.1 Features

- ☒ Surface-mounted package
- ☒ Low Thermal Resistance



#### 1.2 Applications

- ☒ Motor drivers
- ☒ DC/DC Converter

#### 1.3 Quick reference

- ☒  $BV \geq 40\text{ V}$
- ☒  $P_{\text{tot}} \leq 93\text{ W}$
- ☒  $I_D \leq 178\text{ A}$
- ☒  $R_{\text{DS(ON)}} \leq 1.5\text{ m}\Omega @ V_{\text{GS}} = 10\text{ V}$
- ☒  $R_{\text{DS(ON)}} \leq 2.6\text{ m}\Omega @ V_{\text{GS}} = 4.5\text{ V}$

### 2. Pin Description

| Pin     | Description | Simplified Outline                                                                                                  | Symbol                                                                                |
|---------|-------------|---------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 1,2,3   | Source      |  <p>Top View<br/>PDFN5x6-8L</p> |  |
| 4       | Gate        |                                                                                                                     |                                                                                       |
| 5,6,7,8 | Drain       |                                                                                                                     |                                                                                       |

## 3. Limiting Values

| Symbol            | Parameter                                        | Conditions                                    | Min | Max      | Unit                 |
|-------------------|--------------------------------------------------|-----------------------------------------------|-----|----------|----------------------|
| $V_{DS}$          | Drain-Source Voltage                             | $T_C=25^{\circ}\text{C}$                      | -   | 40       | V                    |
| $V_{GS}$          | Gate-Source Voltage                              | $T_C=25^{\circ}\text{C}$                      | -   | $\pm 20$ | V                    |
| $I_D^*$           | Drain Current                                    | $T_C=25^{\circ}\text{C}, V_{GS}=10\text{ V}$  | -   | 178      | A                    |
|                   |                                                  | $T_C=100^{\circ}\text{C}, V_{GS}=10\text{ V}$ | -   | 126      | A                    |
| $I_{DM}^{*,**}$   | Pulsed Drain Current                             | $T_C=25^{\circ}\text{C}, V_{GS}=10\text{ V}$  | -   | 800      | A                    |
| $P_{tot}$         | Drain Power Dissipation                          | $T_C=25^{\circ}\text{C}$                      | -   | 93       | W                    |
| $I_S$             | Diode Forward Current                            | $T_C=25^{\circ}\text{C}$                      | -   | 178      | A                    |
| $E_{AS}^*$        | Single Pulsed Avalanche Energy                   | $V_{DD}=40\text{ V}, L=1.0\text{ mH}$         | -   | 544      | mJ                   |
| $T_J, T_{stg}$    | Operating Junction and Storage Temperature Range |                                               | -55 | 175      | $^{\circ}\text{C}$   |
| $R_{\theta JA}^*$ | Thermal Resistance-Junction to Ambient           |                                               | -   | 62.5     | $^{\circ}\text{C/W}$ |
| $R_{\theta JC}$   | Thermal Resistance-Junction to Case              |                                               | -   | 1.6      | $^{\circ}\text{C/W}$ |

Notes:

- \* Surface Mounted on 1 in<sup>2</sup> pad area,  $t \leq 10\text{ sec.}$
- \*\* Pulse width  $\leq 300\text{ }\mu\text{s}$ , duty cycle  $\leq 2\%$ .
- \*\*\* Limited by bonding wire.

## 4. Marking Information

| Product Name | Marking                                                                                                                                                                                     |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| KJ1R5N04G    | <div style="display: inline-block; background-color: black; color: white; padding: 2px;">KJ1R5N04</div> <div style="display: inline-block; vertical-align: middle;">YWWXXX: Date Code</div> |

## 5. Ordering Code

| Product Name | Package     | Reel size | Tape width | Quantity (pcs) |
|--------------|-------------|-----------|------------|----------------|
| KJ1R5N04G    | PDFN 5x6-8L | 13"       | 12 mm      | 5000           |

Note: KUAJIEXIN defines "Green" as lead-free (RoHS compliant) and halogen free (Br or Cl does not exceed 900 ppm by weight in homogeneous material and total of Br and Cl does not exceed 1500 ppm by weight; Follow IEC 61249-2-21 and IPC / JEDEC J-STD-020C)

## 6. Electrical Characteristics (T<sub>A</sub>=25°C unless otherwise noted)

| Symbol                                   | Parameter                      | Conditions                                                                                                                | Min | Typ  | Max  | Unit |
|------------------------------------------|--------------------------------|---------------------------------------------------------------------------------------------------------------------------|-----|------|------|------|
| Static Characteristics                   |                                |                                                                                                                           |     |      |      |      |
| BV <sub>DSS</sub>                        | Drain-Source Breakdown Voltage | V <sub>GS</sub> =0 V, I <sub>D</sub> =250 μA                                                                              | 40  | -    | -    | V    |
| V <sub>GS(th)</sub> <sup>a</sup>         | Gate Threshold Voltage         | V <sub>DS</sub> =V <sub>GS</sub> , I <sub>DS</sub> =250 μA                                                                | 1.0 | -    | 2.0  | V    |
| I <sub>DSS</sub>                         | Drain Leakage Current          | V <sub>DS</sub> =32 V, V <sub>GS</sub> =0 V                                                                               | -   | -    | 1    | μA   |
| I <sub>GSS</sub>                         | Gate Leakage Current           | V <sub>GS</sub> =±20 V, V <sub>DS</sub> =0 V                                                                              | -   | -    | ±100 | nA   |
| R <sub>DS(ON)</sub> <sup>a</sup>         | On-State Resistance            | V <sub>GS</sub> =10 V, I <sub>D</sub> =30 A                                                                               | -   | 1.3  | 1.5  | mΩ   |
|                                          |                                | V <sub>GS</sub> =4.5 V, I <sub>D</sub> =20 A                                                                              | -   | 2.2  | 2.6  |      |
| Diode Characteristics                    |                                |                                                                                                                           |     |      |      |      |
| V <sub>SD</sub> <sup>a</sup>             | Diode Forward Voltage          | I <sub>SD</sub> =30 A, V <sub>GS</sub> =0V                                                                                | -   | -    | 1.3  | V    |
| t <sub>rr</sub>                          | Reverse Recovery Time          | I <sub>SD</sub> =30 A, V <sub>GS</sub> =0V,<br>dI <sub>SD</sub> /dt=100A/μs                                               | -   | 45   | -    | ns   |
| Q <sub>rr</sub>                          | Reverse Recovery Charge        |                                                                                                                           | -   | 26   | -    | nC   |
| Dynamic Characteristics <sup>b</sup>     |                                |                                                                                                                           |     |      |      |      |
| C <sub>iss</sub>                         | Input Capacitance              | V <sub>GS</sub> =0 V, V <sub>DS</sub> =20 V<br>Frequency=1 MHz                                                            | -   | 2638 | -    | pF   |
| C <sub>oss</sub>                         | Output Capacitance             |                                                                                                                           | -   | 1233 | -    |      |
| C <sub>rss</sub>                         | Reverse Transfer Capacitance   |                                                                                                                           | -   | 123  | -    |      |
| t <sub>d(on)</sub>                       | Turn-on Delay Time             | V <sub>DS</sub> =20 V, V <sub>GEN</sub> =10 V,<br>R <sub>G</sub> =3.9 Ω, R <sub>L</sub> =0.66 Ω,<br>I <sub>DS</sub> =30 A | -   | 10   | -    | ns   |
| t <sub>r</sub>                           | Turn-on Rise Time              |                                                                                                                           | -   | 68   | -    |      |
| t <sub>d(off)</sub>                      | Turn-off Delay Time            |                                                                                                                           | -   | 51   | -    |      |
| t <sub>f</sub>                           | Turn-off Fall Time             |                                                                                                                           | -   | 46   | -    |      |
| Gate Charge Characteristics <sup>b</sup> |                                |                                                                                                                           |     |      |      |      |
| Q <sub>g</sub>                           | Total Gate Charge              | V <sub>DS</sub> =20 V, V <sub>GS</sub> =10 V,<br>I <sub>DS</sub> =30 A                                                    | -   | 58   | -    | nC   |
| Q <sub>gs</sub>                          | Gate-Source Charge             |                                                                                                                           | -   | 11   | -    |      |
| Q <sub>gd</sub>                          | Gate-Drain Charge              |                                                                                                                           | -   | 15   | -    |      |


Notes

a. Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%.


b. Guaranteed by design, not subject to production testing.

## 7. Typical Characteristics (cont.)


**Power Capability**

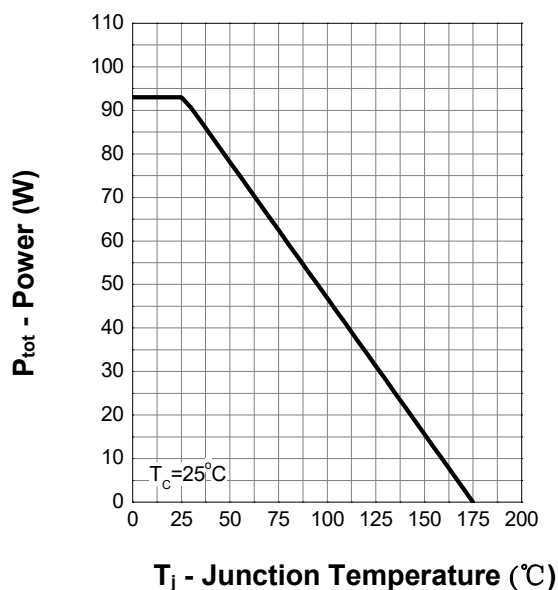


**Current Capability**

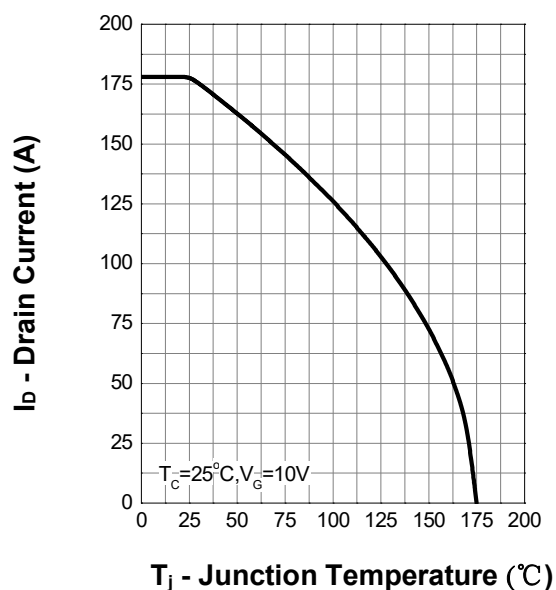

**Safe Operation Area**

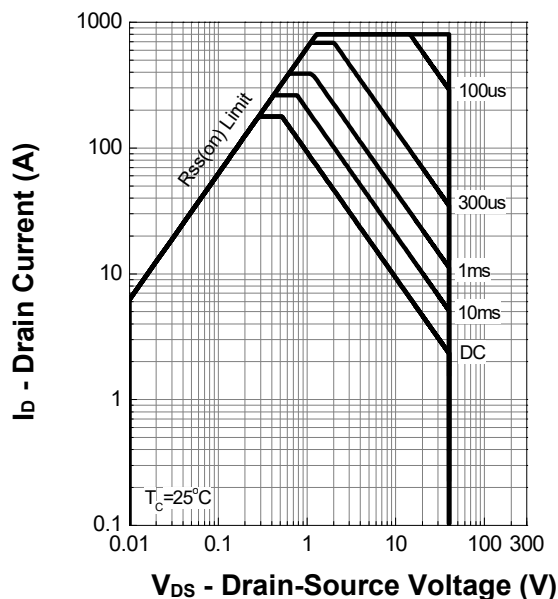


**Thermal Transient Impedance**

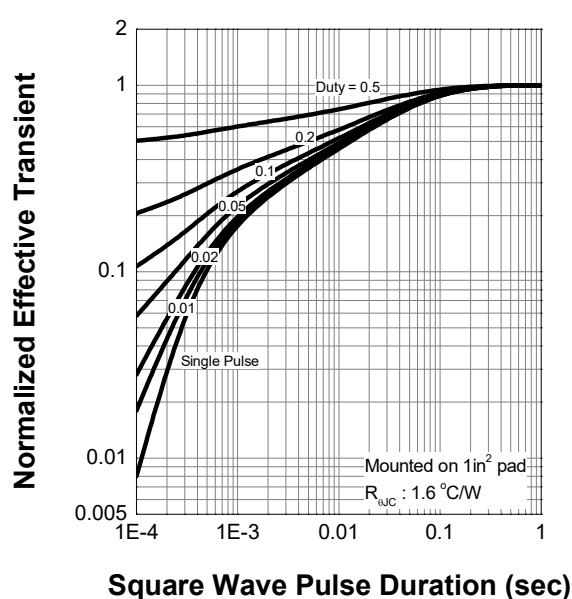


## 7. Typical Characteristics (cont.)


**Output Characteristics**

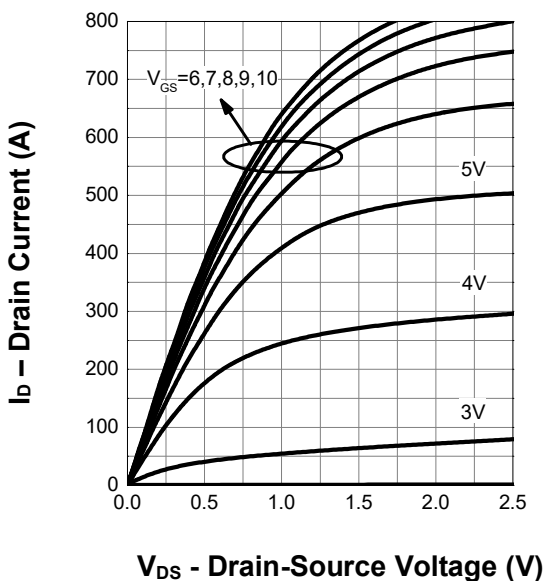


**Drain-Source On Resistance**

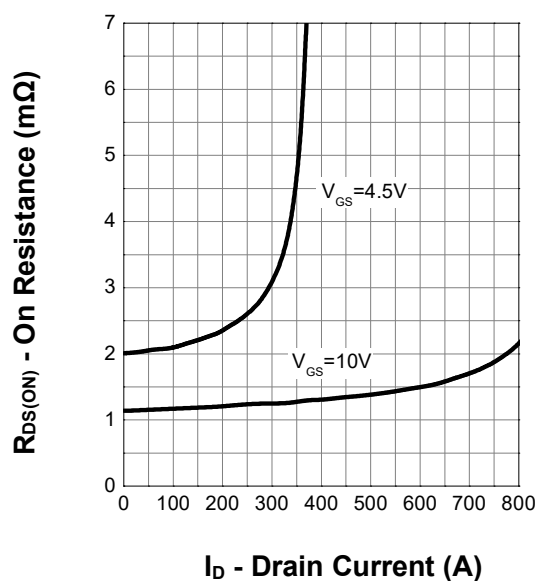

**Transfer Characteristics**

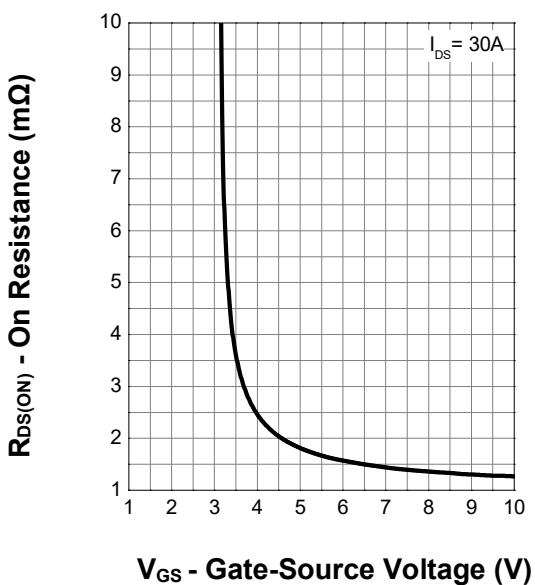


**Gate Threshold Voltage**

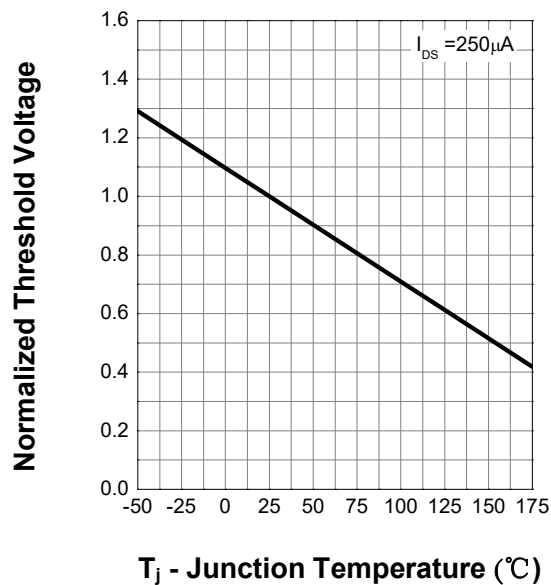


## 7. Typical Characteristics (cont.)


### Drain-Source On Resistance

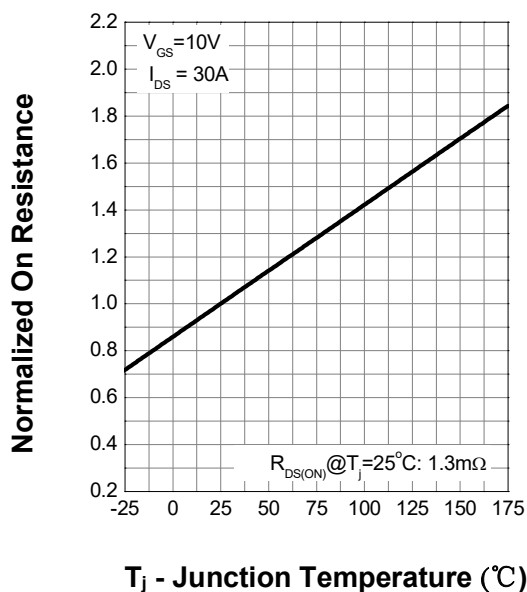


### Body Diode Characteristics

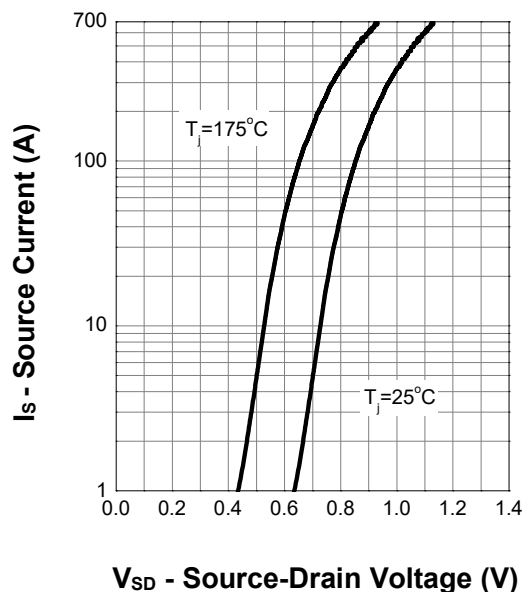

### Capacitance

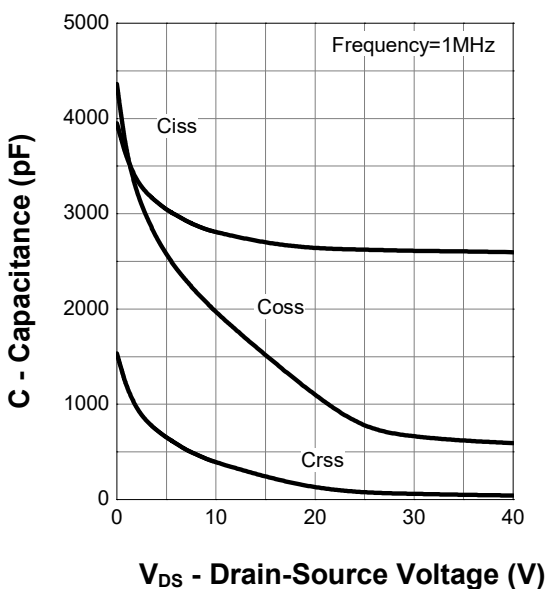


### Gate Charge

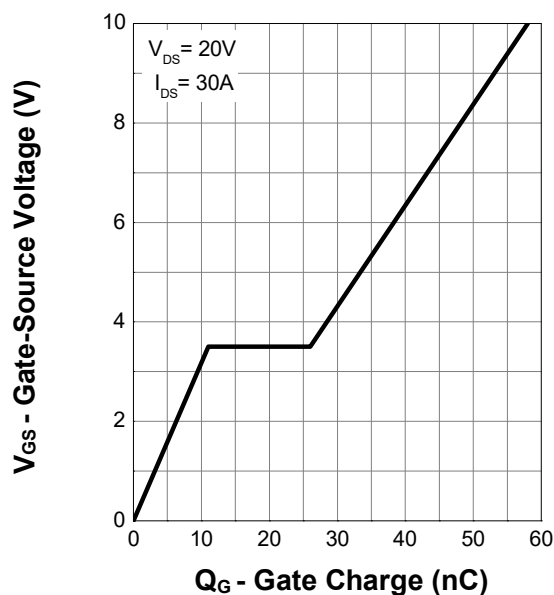

## 8. Package Dimensions

PDFN 5x6-8L Package

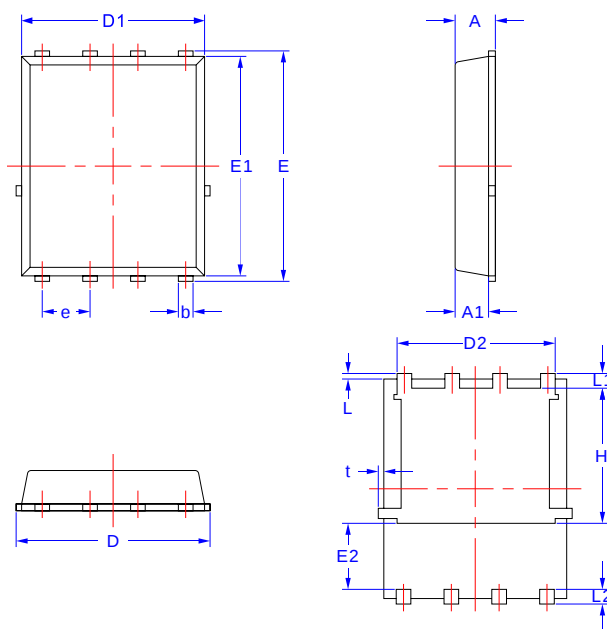

| Symbol | Dimensions in Millimeters |      |
|--------|---------------------------|------|
|        | Min.                      | Max. |
| A      | 1.03                      | 1.17 |
| A1     | 0.824                     | 0.97 |
| b      | 0.34                      | 0.48 |
| D      | 4.80                      | 5.40 |
| D1     | 4.80                      | 5.00 |
| D2     | 4.11                      | 4.31 |
| E      | 5.95                      | 6.15 |
| E1     | 5.65                      | 5.85 |
| E2     | 1.40                      | -    |
| e      | 1.27 BSC                  |      |
| L      | 0.05                      | 0.25 |
| L1     | 0.38                      | 0.50 |
| L2     | 0.38                      | 0.71 |
| H      | 3.30                      | 3.50 |
| t      | -                         | 0.18 |