

## N-Channel Enhancement Mode MOSFET

### 1. Product Information

#### 1.1 Features

- ☑ Super Trench technology
- ☑  $T_J$  max 175°C
- ☑ Extremely Low  $R_{DS(ON)}$  and  $Q_g$
- ☑ MSL1



#### 1.2 Applications

- ☑ DC/DC Converter
- ☑ High power inverter system

#### 1.3 Quick reference

- ☑  $BV \geq 250\text{ V}$
- ☑  $P_D \leq 333\text{ W}$
- ☑  $I_D \leq 90\text{ A}$
- ☑  $R_{DS(ON)} \leq 16\text{ m}\Omega @ V_{GS} = 10\text{ V}$

### 2. Pin Description

| Pin     | Description | Simplified Outline                                                                                                 | Symbol                                                                                |
|---------|-------------|--------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 1       | Gate(G)     |  <p>Top View<br/>TO-263-7L</p> |  |
| 2, 3    | Source(S)   |                                                                                                                    |                                                                                       |
| 4       | Drain(D)    |                                                                                                                    |                                                                                       |
| 5, 6, 7 | Source(S)   |                                                                                                                    |                                                                                       |

## 3. Limiting Values

| Symbol              | Parameter                                        | Conditions                                    | Min | Max      | Unit                 |
|---------------------|--------------------------------------------------|-----------------------------------------------|-----|----------|----------------------|
| $V_{DS}$            | Drain-Source Voltage                             | $T_C=25^{\circ}\text{C}$                      | -   | 250      | V                    |
| $V_{GS}$            | Gate-Source Voltage                              | $T_C=25^{\circ}\text{C}$                      | -   | $\pm 20$ | V                    |
| $I_D^{*,***}$       | Drain Current (DC)                               | $T_C=25^{\circ}\text{C}, V_{GS}=10\text{ V}$  | -   | 90       | A                    |
|                     |                                                  | $T_C=100^{\circ}\text{C}, V_{GS}=10\text{ V}$ | -   | 63       | A                    |
| $I_{DM}^{*,**}$     | Drain Current (Pulsed)                           | $T_C=25^{\circ}\text{C}, V_{GS}=10\text{ V}$  | -   | 360      | A                    |
| $P_D$               | Drain Power Dissipation                          | $T_C=25^{\circ}\text{C}$                      | -   | 333      | W                    |
| $I_S$               | Continuous-Source Current                        | $T_C=25^{\circ}\text{C}$                      | -   | 90       | A                    |
| $T_J, T_{stg}$      | Operating Junction and Storage Temperature Range |                                               | -55 | 175      | $^{\circ}\text{C}$   |
| $E_{AS}^{*}$        | Single Pulsed Avalanche Energy                   | $V_{DD}=50\text{ V}, L=0.5\text{ mH}$         | -   | 1680     | mJ                   |
| $R_{\theta JC}^{*}$ | Thermal Resistance-Junction to Case              |                                               | -   | 0.45     | $^{\circ}\text{C/W}$ |

Notes:

\* Surface mounted on 1 in<sup>2</sup> pad area,  $t \leq 10\text{ sec.}$

\*\* Pulse width  $\leq 300\text{ }\mu\text{s}$ , duty cycle  $\leq 2\%$ .

\*\*\* Limited by bonding wire.

## 4. Marking Information

| Product Name | Marking                                                                                                                                   |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| KJ15N25D7    | <div style="border: 1px solid black; padding: 5px; display: inline-block;"> <b>KJ15N25D7</b><br/> <b>AYWWXX</b><br/> <b>XXXXXX</b> </div> |

## 5. Ordering Code

| Product Name | Package  | Reel size | Tape width | Quantity (pcs) |
|--------------|----------|-----------|------------|----------------|
| KJ15N25D7    | TO263-7L | 13"       | 24 mm      | 800            |

Note: KUAJIEXIN defines "Green" as lead-free (RoHS compliant) and halogen free (Br or Cl does not exceed 900 ppm by weight in homogeneous material and total of Br and Cl does not exceed 1500 ppm by weight; Follow IEC 61249-2-21 and IPC/JEDEC J-STD-020C)

## 6. Electrical Characteristics (T<sub>A</sub>=25°C unless otherwise noted)


| Symbol                                   | Parameter                      | Conditions                                                                                             | Min | Typ  | Max  | Unit |
|------------------------------------------|--------------------------------|--------------------------------------------------------------------------------------------------------|-----|------|------|------|
| Static Characteristics                   |                                |                                                                                                        |     |      |      |      |
| BV <sub>DSS</sub>                        | Drain-Source Breakdown Voltage | V <sub>GS</sub> =0 V, I <sub>DS</sub> =250 μA                                                          | 250 | -    | -    | V    |
| V <sub>GS(th)</sub>                      | Gate Threshold Voltage         | V <sub>DS</sub> =V <sub>GS</sub> , I <sub>DS</sub> =250 μA                                             | 2.5 | -    | 4.5  | V    |
| I <sub>DSS</sub>                         | Drain Leakage Current          | V <sub>DS</sub> =250 V, V <sub>GS</sub> =0 V                                                           | -   | -    | 1    | μA   |
| I <sub>GSS</sub>                         | Gate Leakage Current           | V <sub>DS</sub> =0 V, V <sub>GS</sub> =±20 V                                                           | -   | -    | ±100 | nA   |
| R <sub>DS(ON)</sub> <sup>a</sup>         | On-State Resistance            | V <sub>GS</sub> =10 V, I <sub>DS</sub> =50 A                                                           | -   | 14   | 16   | mΩ   |
| g <sub>FS</sub>                          | Forward Transconductance       | V <sub>DS</sub> =10 V, I <sub>DS</sub> =45 A                                                           | 70  | -    | -    | S    |
| R <sub>G</sub>                           | Gate resistance                |                                                                                                        | -   | 3.3  | -    | Ω    |
| Diode Characteristics                    |                                |                                                                                                        |     |      |      |      |
| V <sub>SD</sub> <sup>a</sup>             | Diode Forward Voltage          | V <sub>GS</sub> =0 V, I <sub>SD</sub> =90 A                                                            | -   | -    | 1.2  | V    |
| t <sub>rr</sub>                          | Reverse Recovery Time          | V <sub>GS</sub> =0 V, I <sub>SD</sub> =45 A,<br>dI <sub>SD</sub> /dt=100 A/μs,<br>T <sub>J</sub> =25°C | -   | 208  | -    | ns   |
| Q <sub>rr</sub>                          | Reverse Recovery Charge        |                                                                                                        | -   | 180  | -    | nC   |
| Dynamic Characteristics <sup>b</sup>     |                                |                                                                                                        |     |      |      |      |
| C <sub>iss</sub>                         | Input Capacitance              | V <sub>DS</sub> =125 V, V <sub>GS</sub> =0 V,<br>Frequency=1 MHz                                       | -   | 6605 | -    | pF   |
| C <sub>oss</sub>                         | Output Capacitance             |                                                                                                        | -   | 408  | -    |      |
| C <sub>rss</sub>                         | Reverse Transfer Capacitance   |                                                                                                        | -   | 11   | -    |      |
| t <sub>d(on)</sub>                       | Turn-on Delay Time             | V <sub>DS</sub> =125 V, V <sub>GEN</sub> =10 V,<br>R <sub>G</sub> =4.7 Ω, I <sub>DS</sub> =45 A        | -   | 20   | -    | ns   |
| t <sub>r</sub>                           | Turn-on Rise Time              |                                                                                                        | -   | 27   | -    |      |
| t <sub>d(off)</sub>                      | Turn-off Delay Time            |                                                                                                        | -   | 46   | -    |      |
| t <sub>f</sub>                           | Turn-off Fall Time             |                                                                                                        | -   | 17   | -    |      |
| Gate Charge Characteristics <sup>b</sup> |                                |                                                                                                        |     |      |      |      |
| Q <sub>g</sub>                           | Total Gate Charge              | V <sub>DS</sub> =125 V, V <sub>GS</sub> =10 V,<br>I <sub>DS</sub> =45 A                                | -   | 91   | -    | nC   |
| Q <sub>gs</sub>                          | Gate-Source Charge             |                                                                                                        | -   | 40   | -    |      |
| Q <sub>gd</sub>                          | Gate-Drain Charge              |                                                                                                        | -   | 18   | -    |      |

Notes:


a. Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%.

b. Guaranteed by design, not subject to production testing.


## 7. Typical Characteristics

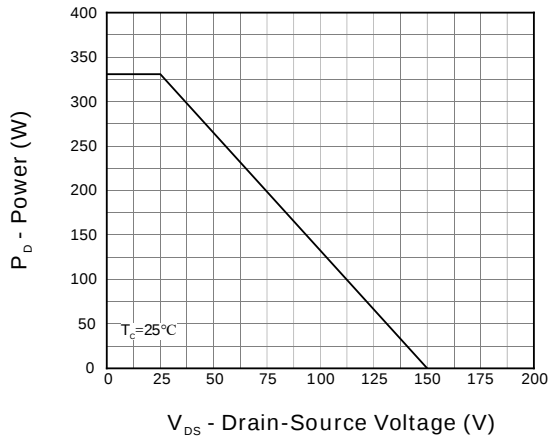


**Fig 1. Output Characteristics**

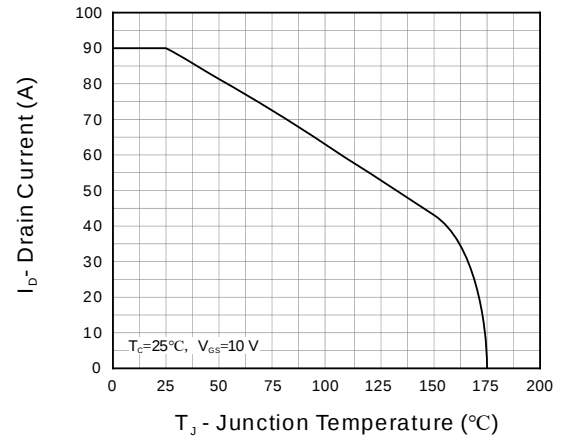


**Fig 2. Current Capability**

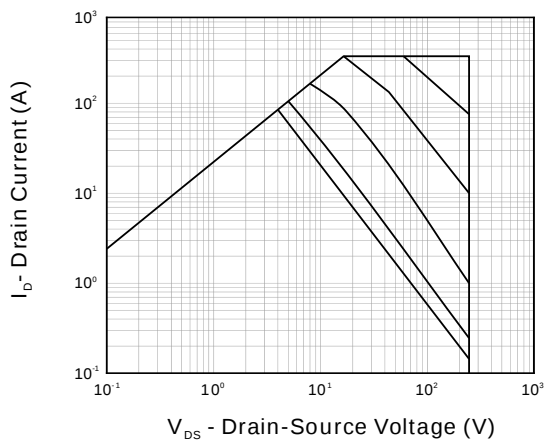


**Fig 3. Safe Operation Area**

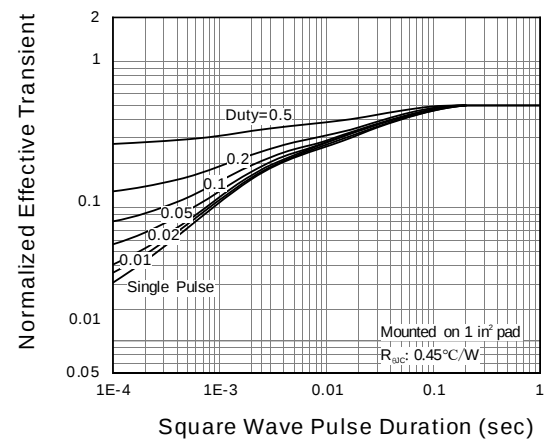

**Fig 4. Transient Thermal Impedance**

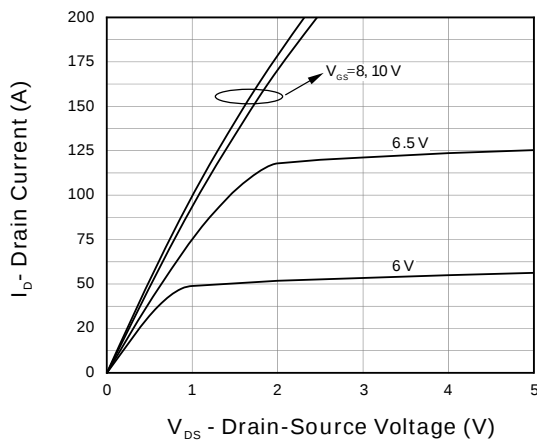


**Fig 5. Output Characteristics**

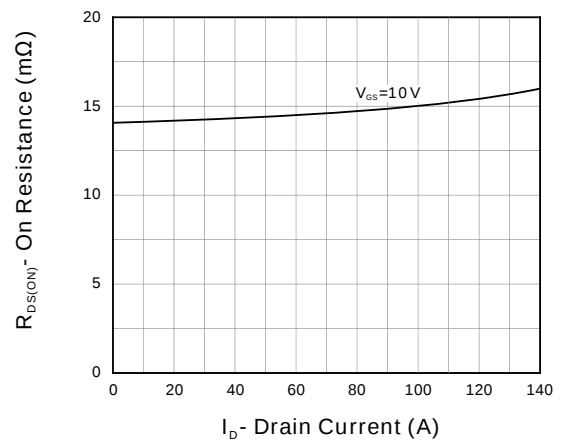


**Fig 6. On Resistance**


## 7. Typical Characteristics (cont.)

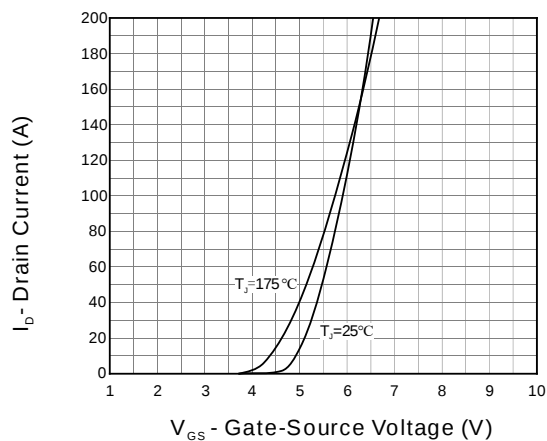


**Fig 7. Transfer Characteristics**

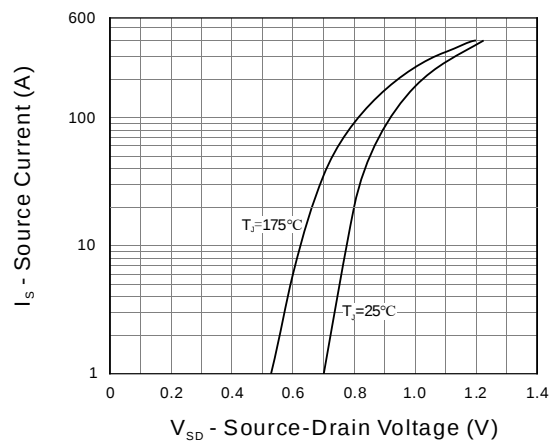


**Fig 8. Diode Forward Current**

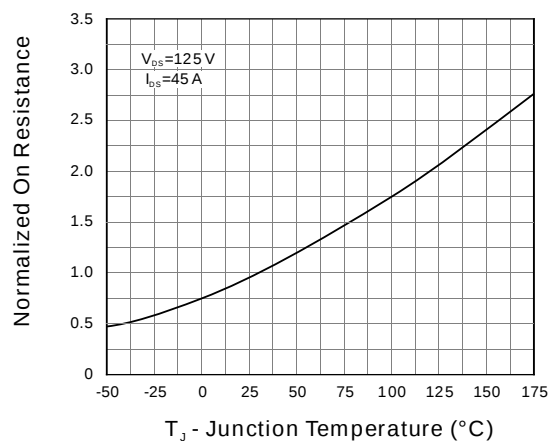

**Fig 9. Normalized On Resistance**

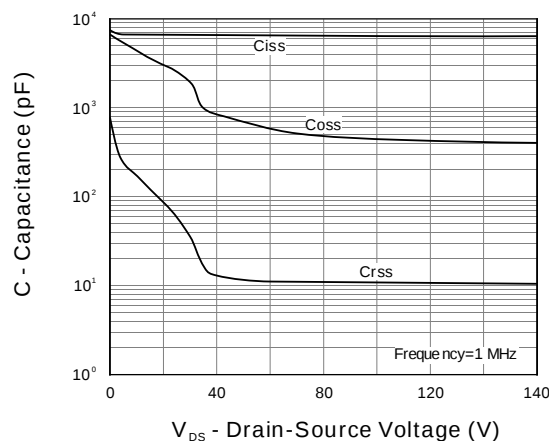


**Fig 10. Capacitance**

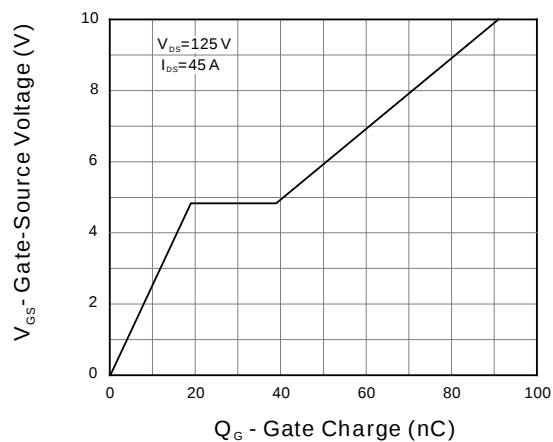

**Fig 11. Gate Charge**

## 8. Package Dimensions

### TO263-7L Package

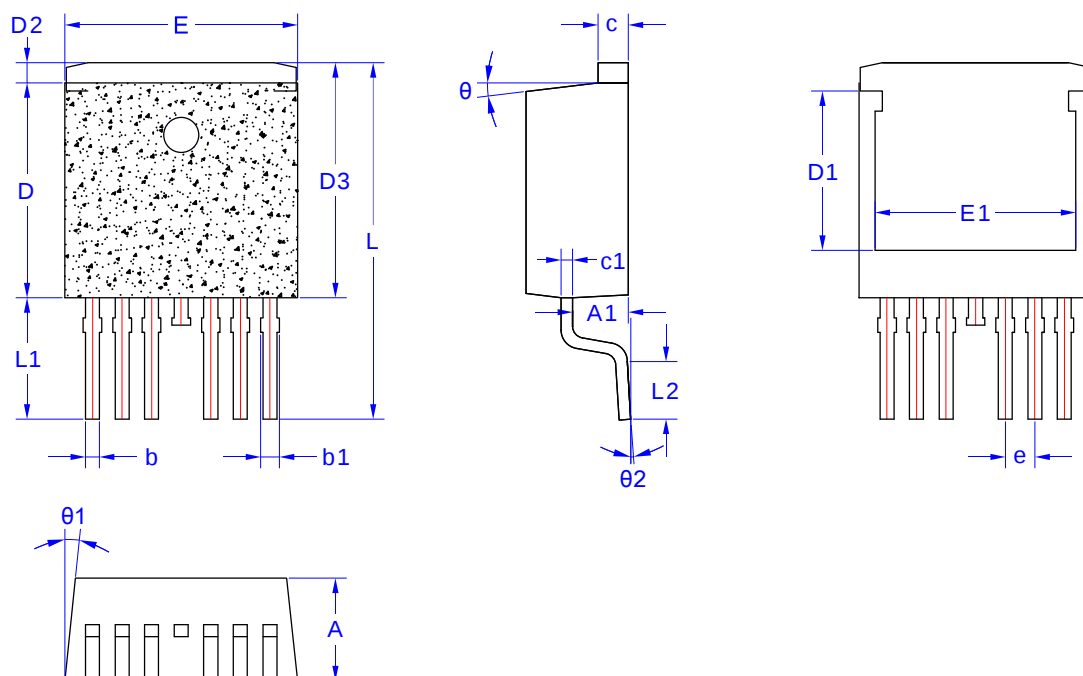

| Symbol     | Dimensions in Millimeters |          |       |
|------------|---------------------------|----------|-------|
|            | MIN                       | NOM      | MAX   |
| A          | 4.20                      | 4.40     | 4.60  |
| A1         | 2.30                      | 2.40     | 2.50  |
| b          | 0.50                      | 0.60     | 0.70  |
| b1         | 0.60                      | 0.70     | 0.80  |
| c          | 1.25                      | 1.30     | 1.35  |
| c1         | 0.45                      | 0.50     | 0.55  |
| D          | 9.05                      | 9.25     | 9.45  |
| D1         | 6.65                      | 6.85     | 7.05  |
| D2         | 0.65                      | 0.85     | 1.05  |
| D3         | 9.90                      | 10.10    | 10.30 |
| E          | 9.80                      | 10.00    | 10.20 |
| E1         | 8.50                      | 8.60     | 8.70  |
| e          |                           | 1.27 BSC |       |
| L          | 14.90                     | 15.10    | 15.40 |
| L1         | 4.80                      | 5.00     | 5.20  |
| L2         | 2.30                      | 2.50     | 2.70  |
| $\theta$   | 5°                        | 7°       | 10°   |
| $\theta_1$ | 3°                        | 5°       | 8°    |
| $\theta_2$ | 0°                        | -        | 8°    |