

P-Channel Enhancement Mode MOSFET

1. Product Information

1.1 Features

- ☒ Advanced trench cell design
- ☒ Low Thermal Resistance



1.2 Applications

- ☒ Motor drivers
- ☒ DC/DC Converter

1.3 Quick reference

- ☒ $BV \geq -40\text{ V}$
- ☒ $P_D \leq 104\text{ W}$
- ☒ $I_D \leq -58\text{ A}$
- ☒ $R_{DS(ON)} \leq 12\text{ m}\Omega @V_{GS} = -10\text{ V}$
- ☒ $R_{DS(ON)} \leq 22\text{ m}\Omega @V_{GS} = -4.5\text{ V}$

2. Pin Description

Pin	Description	Simplified Outline	Symbol
1,2,3	Source	 Top View PDFN5x6-8L	
4	Gate		
5,6,7,8	Drain		

3. Limiting Values

Symbol	Parameter	Conditions	Min	Max	Unit
V_{DS}	Drain-Source Voltage	$T_C=25^{\circ}\text{C}$	-40	-	V
V_{GS}	Gate-Source Voltage	$T_C=25^{\circ}\text{C}$	-	± 20	V
I_D^*	Drain Current (DC)	$T_C=25^{\circ}\text{C}, V_{GS}=-10\text{ V}$	-	-58	A
		$T_C=100^{\circ}\text{C}, V_{GS}=-10\text{ V}$	-	-41	A
$I_{DM}^{*, **, ***}$	Drain Current (Pulsed)	$T_C=25^{\circ}\text{C}, V_{GS}=-10\text{ V}$	-	-120	A
P_D^*	Drain Power Dissipation	$T_C=25^{\circ}\text{C}$	-	20	W
I_S	Diode Forward Current	$T_C=25^{\circ}\text{C}$	-	-50	A
T_J, T_{stg}	Operating Junction and Storage Temperature Range		-55	150	$^{\circ}\text{C}$
$R_{\theta JC}^*$	Thermal Resistance-Junction to Ambient		-	6	$^{\circ}\text{C/W}$

Notes:

- * Surface mounted on 1 in² pad area, $t \leq 10$ sec.
- ** Pulse width $\leq 10\text{ }\mu\text{s}$, duty cycle $\leq 1\%$.
- *** Limited by bonding wire.

4. Marking Information

Product Name	Marking
KJ50P04G	50P04 XXXXXX

5. Ordering Code

Product Name	Package	Reel size	Tape width	Quantity (pcs)
KJ50P04G	PDFN 5x6-8L	13"	12mm	5000

Note: KUIJIEXIN defines "Green" as lead-free (RoHS compliant) and halogen free (Br or Cl does not exceed 900 ppm by weight in homogeneous material and total of Br and Cl does not exceed 1500 ppm by weight; Follow IEC 61249-2-21 and IPC/JEDEC J-STD-020C).

6. Electrical Characteristics (T_C=25°C unless otherwise noted)


Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Static Characteristics						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0 V, I _{DS} =-250 μA	-40	-	-	V
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _{DS} =-250 μA	-1.5	-	-2.5	V
I _{DSS}	Drain Leakage Current	V _{DS} =-40 V, V _{GS} =0 V	-	-	-1	μA
I _{GSS}	Gate Leakage Current	V _{GS} =0 V, V _{GS} =±20 V	-	-	±100	nA
R _{DS(ON)} ^a	Drain-Source On-State Resistance	V _{GS} =-10 V, I _D =-15 A	-	11	13	mΩ
		V _{GS} =-4.5 V, I _{DS} =-10 A	-	18	22	
Diode Characteristics						
V _{SD} ^a	Diode Forward Voltage	I _{SD} =-15 A, V _{GS} =0 V	-	-	-1.3	V
t _{rr}	Reverse Recovery Time	I _{DS} =-15 A, V _{GS} =0 V, dI _{SD} /dt=100 A/μs	-	18	-	ns
Q _{rr}	Reverse Recovery Charge		-	12	-	μC
Dynamic Characteristics ^b						
C _{iss}	Input Capacitance	V _{GS} =0 V, V _{DS} =-20 V, f=1 MHz	-	3375	-	pF
C _{oss}	Output Capacitance		-	233	-	
C _{rss}	Reverse Transfer Capacitance		-	184	-	
t _{d(on)}	Turn-on Delay Time	V _{DS} =-20 V, V _{GEN} =-10 V, R _G =3.9 Ω, R _L =1.33 Ω, I _D =-15 A	-	9.6	-	ns
t _r	Turn-on Rise Time		-	40	-	
t _{d(off)}	Turn-off Delay Time		-	72	-	
t _f	Turn-off Fall Time		-	57	-	
Gate Charge Characteristics ^b						
Q _g	Total Gate Charge	V _{DS} =-20 V, V _{GS} =-10 V, I _{DS} =-15 A	-	55	-	nC
Q _{gs}	Gate-Source Charge		-	15	-	
Q _{gd}	Gate-Drain Charge		-	7.4	-	

Notes:


- Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%.
- Guaranteed by design, not subject to production testing.

7. Typical Characteristics


Power Capability

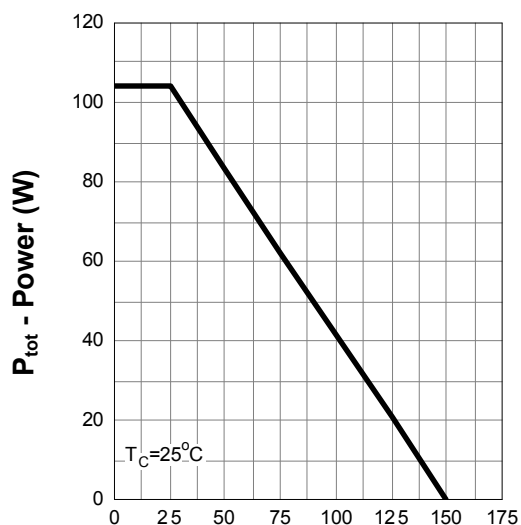


Current Capability

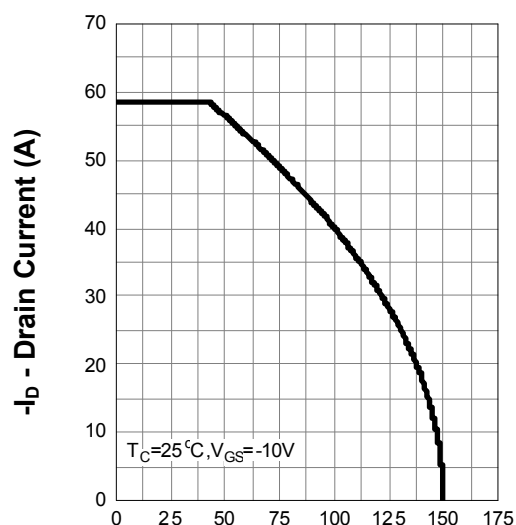

Safe Operation Area

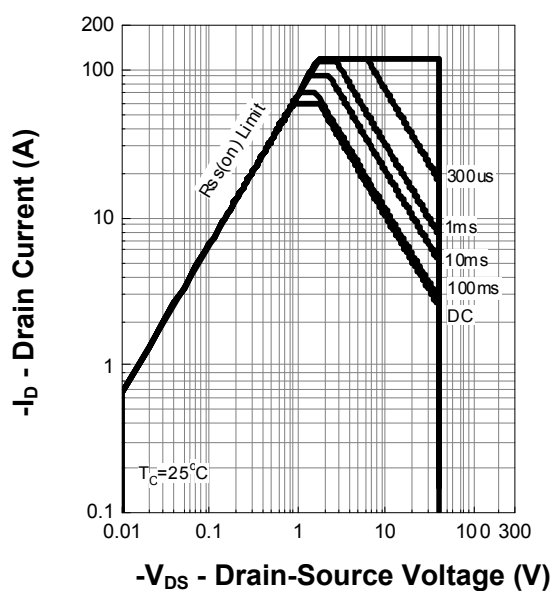


Thermal Transient Impedance

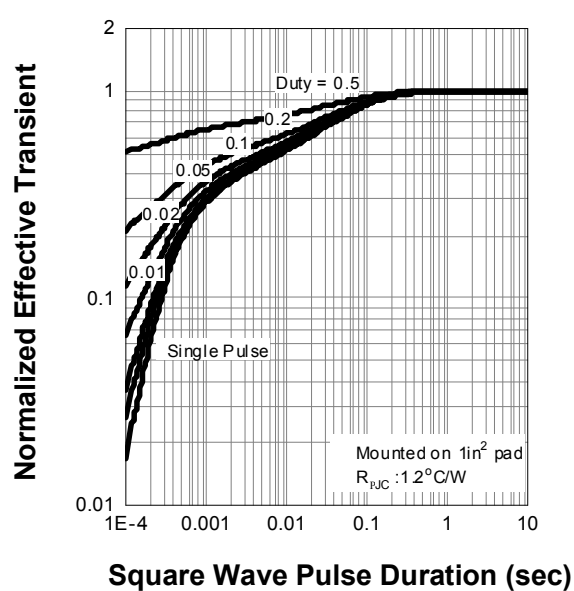


7. Typical Characteristics (cont.)


Output Characteristics

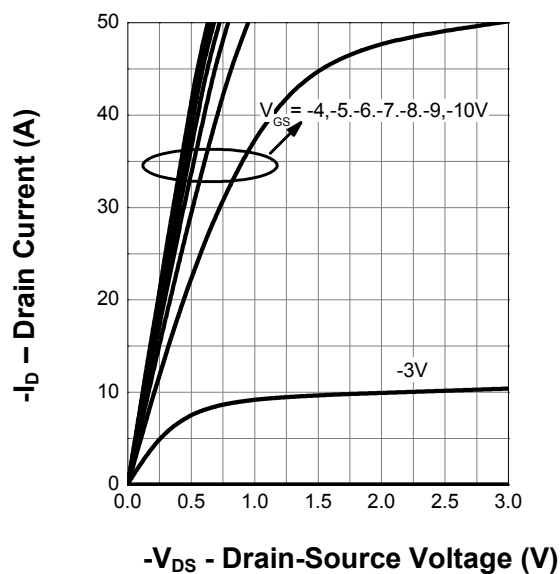


Drain-Source On Resistance

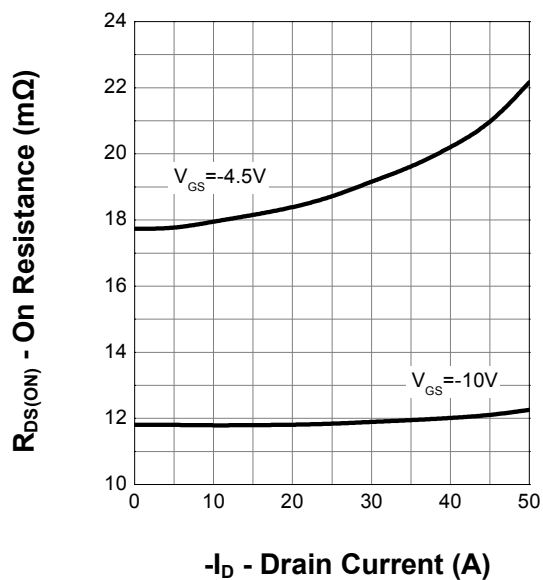

Transfer Characteristics

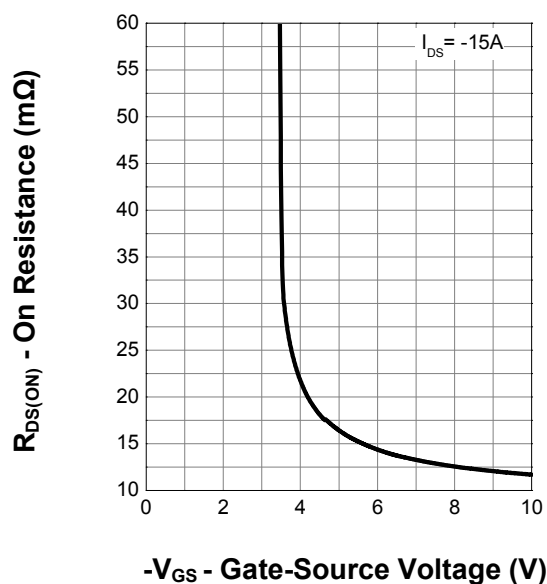


Gate Threshold Voltage

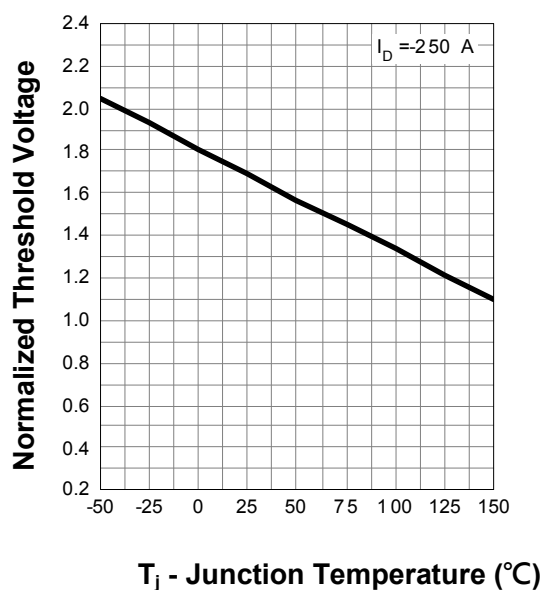


7. Typical Characteristics (cont.)

Drain-Source On Resistance

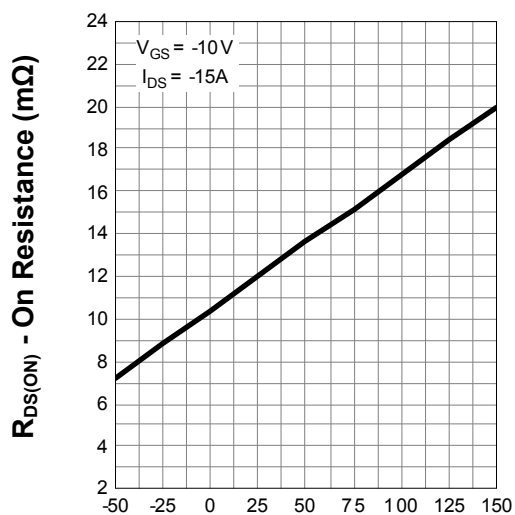


T_J - Junction Temperature (°C)

Body Diode Characteristics

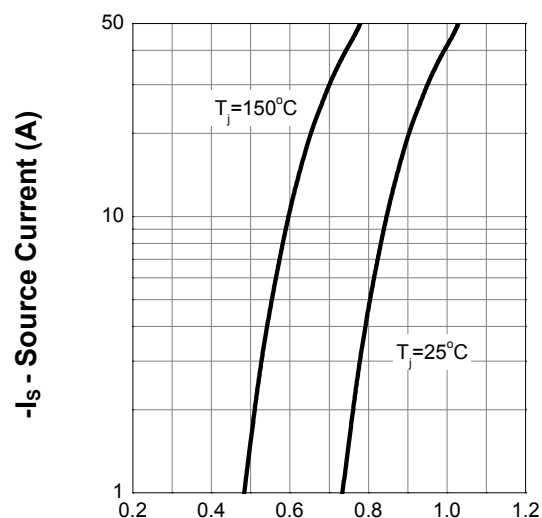


$-V_{SD}$ - Source-Drain Voltage (V)

Capacitance

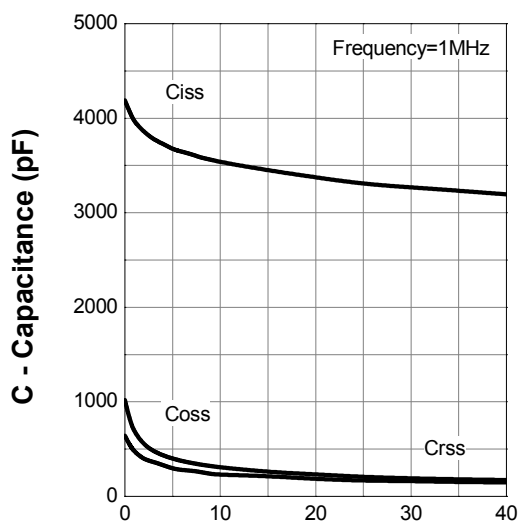

$-V_{DS}$ - Drain-Source Voltage (V)


Gate Charge

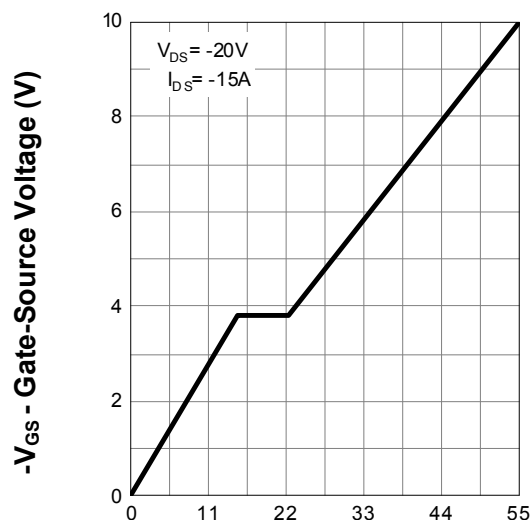

Q_G - Gate Charge (nC)

8. Package Dimensions

PDFN 5×6-8L Package

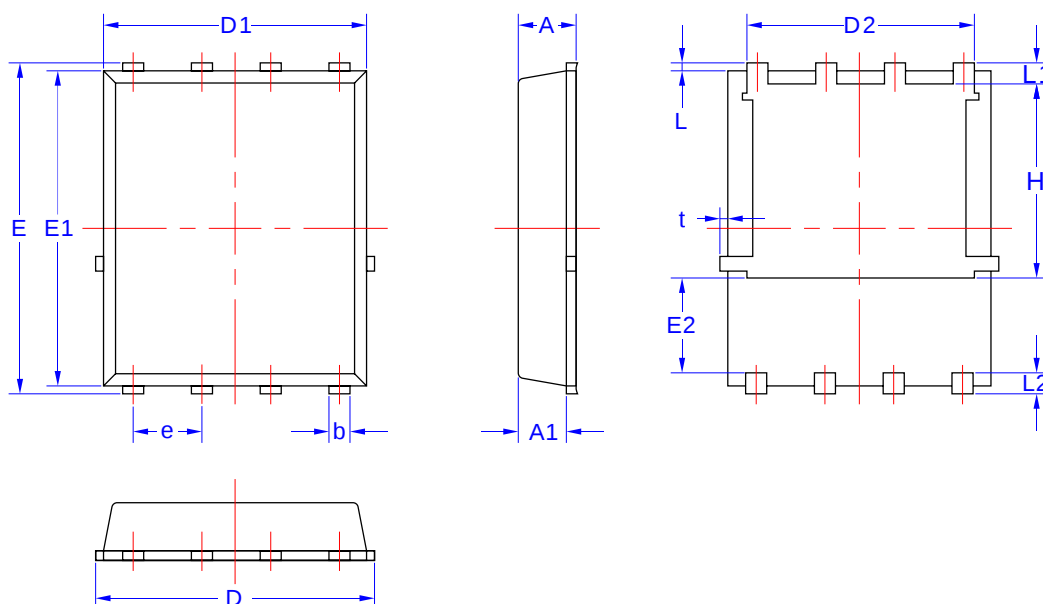

Symbol	Dimensions in Millimeters	
	MIN.	MAX
A	1.03	1.17
A1	0.824	0.97
b	0.34	0.48
D	4.80	5.40
D1	4.80	5.00
D2	4.11	4.31
E	5.95	6.15
E1	5.65	5.85
E2	1.40	-
e	1.27 BSC	
L	0.05	0.25
L1	0.38	0.50
L2	0.38	0.71
H	3.30	3.50
t	-	0.18