

P-Channel Enhancement Mode MOSFET

1. Product Information

1.1 Features

- ☒ Advanced trench cell design
- ☒ Low Thermal Resistance



1.2 Applications

- ☒ Motor drivers
- ☒ DC-DC Converter

1.3 Quick reference

- ☒ $BV \geq -60V$
- ☒ $P_{tot} \leq 156W$
- ☒ $I_D \leq -90A$
- ☒ $R_{DS(ON)} \leq 12m\Omega @ V_{GS} = -10V$
- ☒ $R_{DS(ON)} \leq 15m\Omega @ V_{GS} = -4.5V$

2. Pin Description

Pin	Description	Simplified Outline	Symbol
1,2,3	Source	 Top View PDFN5x6-8L	
4	Gate		
5,6,7,8	Drain		

3. Limiting Values

Symbol	Parameter	Conditions	Min	Max	Unit
V_{DS}	Drain-Source Voltage	$T_C=25^{\circ}\text{C}$	-60	-	V
V_{GS}	Gate-Source Voltage	$T_C=25^{\circ}\text{C}$	-	± 20	V
I_D	Drain Current	$T_C=25^{\circ}\text{C}, V_{GS}=-10\text{V}$	-	-90	A
		$T_C=100^{\circ}\text{C}, V_{GS}=-10\text{V}$	-	-58	A
I_{DM}^*	Pulsed Source Current	$T_C=25^{\circ}\text{C}, V_{GS}=-10\text{V}$	-	-120	A
P_{tot}	Total Power Dissipation	$T_C=25^{\circ}\text{C}$	-	156	W
T_{stg}	Storage Temperature		-55	150	$^{\circ}\text{C}$
T_J	Junction Temperature		-	150	$^{\circ}\text{C}$
I_S	Diode Forward Current	$T_C=25^{\circ}\text{C}$	-	-90	A
$R_{\theta JA}$	Thermal Resistance-Junction to Ambient		-	62.5	$^{\circ}\text{C/W}$
$R_{\theta JC}$	Thermal Resistance-Junction to Case		-	0.8	

Notes :

- * Pulse width $\leq 10 \mu\text{s}$, duty cycle $\leq 1\%$.
- ** Surface mounted on 1 in² pad area, $t \leq 10 \text{ sec}$.
- *** Limited by bonding wire.

4. Marking Information

Product Name	Marking
KJ90P06K	KJ90P06G XXXXXX

5. Ordering Code

Product Name	Package	Reel size	Tape width	Quantity (pcs)
KJ6016G	PDFN 5×6-8L	13"	12 mm	5000


Note: KUAIJIEXIN defines "Green" as lead-free (RoHS compliant) and halogen free (Br or Cl does not exceed 900 ppm by weight in homogeneous material and total of Br and Cl does not exceed 1500 ppm by weight; Follow IEC 61249-2-21 and IPC/JEDEC J-STD-020C).

6. Electrical Characteristics (T_A=25°C Unless Otherwise Noted)


Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Static Characteristics						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =-250μA	-60	-	-	V
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _{DS} =-250μA	-1	-	-2.5	V
I _{DSS}	Zero Gate Voltage Source Current	V _{DS} =-48V, V _{GS} =0V	-	-	-1	μA
		T _J =85°C	-	-	-30	μA
I _{GSS}	Gate Leakage Current	V _{GS} =±20V, V _{DS} =0V	-	-	±100	nA
R _{DS(ON)}	Drain-Source On-State Resistance	V _{GS} =-10V, I _D =-20A	-	10	12	mΩ
		V _{GS} =-4.5V, I _D =-10A	-	12	15	mΩ
Diode Characteristics						
V _{SD}	Diode Forward Voltage	I _{SD} =-20A, V _{GS} =0V	-	-	-1.3	V
t _{rr}	Reverse Recovery Time	I _{SD} =-20A, dI _{SD} /dt=100A/μs	-	40	-	ns
Q _{rr}	Reverse Recovery Charge		-	47	-	nC
Dynamic Characteristics						
C _{iss}	Input Capacitance	V _{GS} =0V, V _{DS} =-30V Frequency=1MHz	-	8038	-	pF
C _{oss}	Output Capacitance		-	335	-	
C _{rss}	Reverse Transfer Capacitance		-	144	-	
t _{d(on)}	Turn-on Delay Time	V _{DS} =-30V, V _{GEN} =-10V, R _G =4.5Ω, R _L =1.5Ω, I _D =-20A	-	81	-	ns
t _r	Turn-on Rise Time		-	130	-	
t _{d(off)}	Turn-off Delay Time		-	685	-	
t _f	Turn-off Fall Time		-	255	-	
Gate Charge Characteristics						
Q _g	Total Gate Charge	V _{GS} =-10V, V _{DS} =-30V, I _{DS} =-20A	-	121	-	nC
Q _{gs}	Gate-Source Charge		-	29	-	
Q _{gd}	Gate-Drain Charge		-	13	-	

7. Typical Characteristics


Power Capability

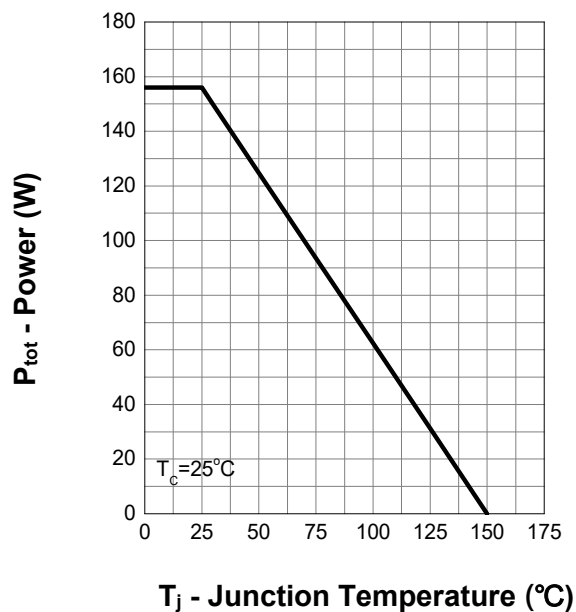


Current Capability

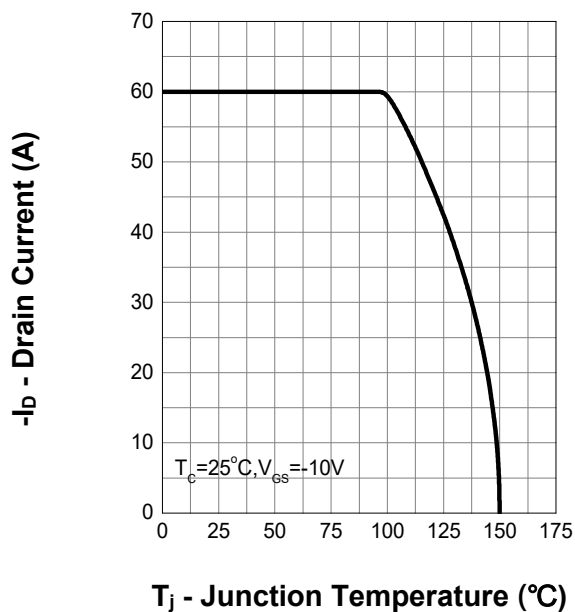

Safe Operation Area

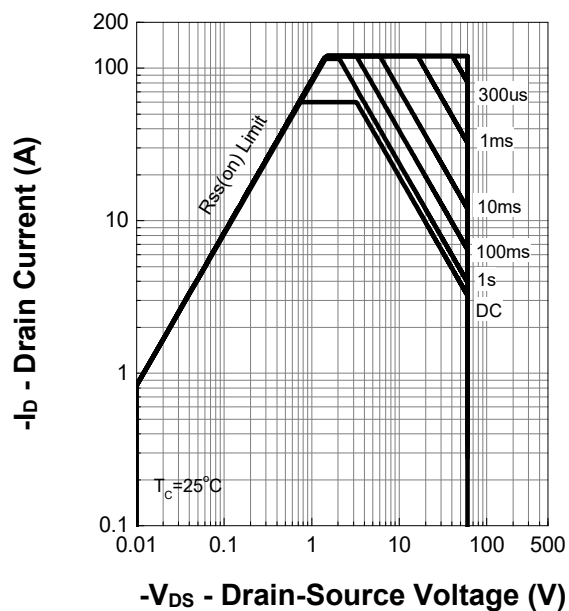


Thermal Transient Impedance

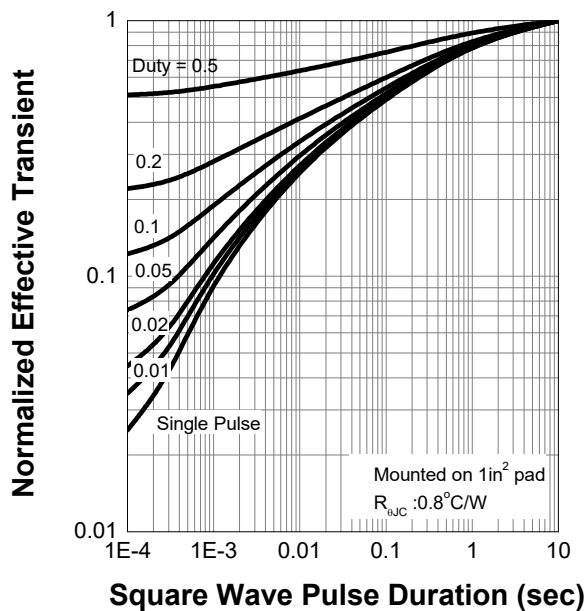


7. Typical Characteristics (cont.)


Output Characteristics

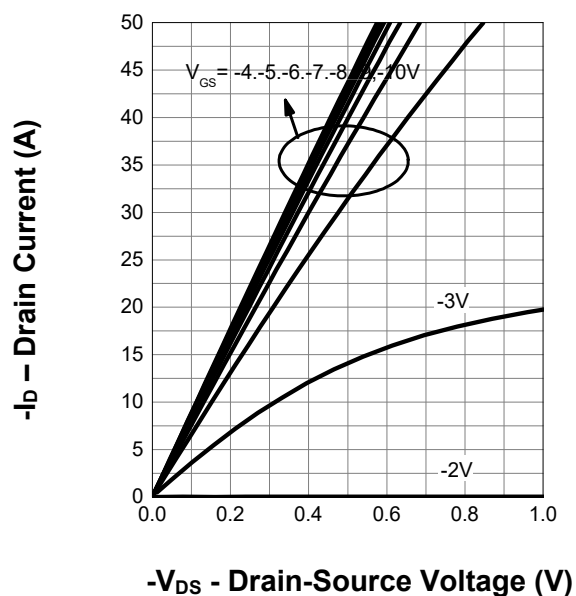


Drain-Source On Resistance

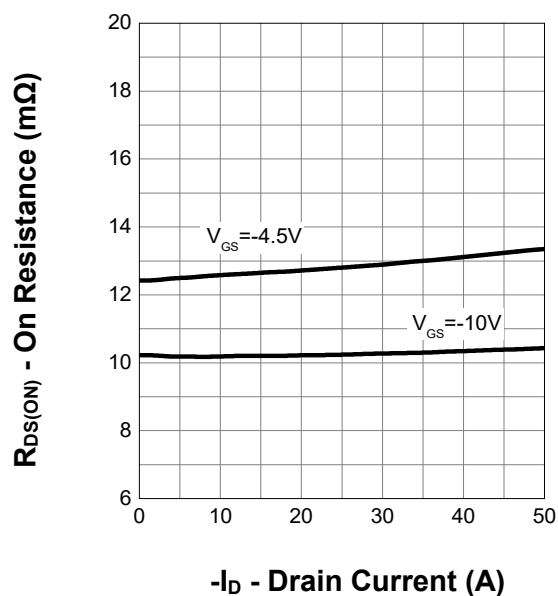

Transfer Characteristics

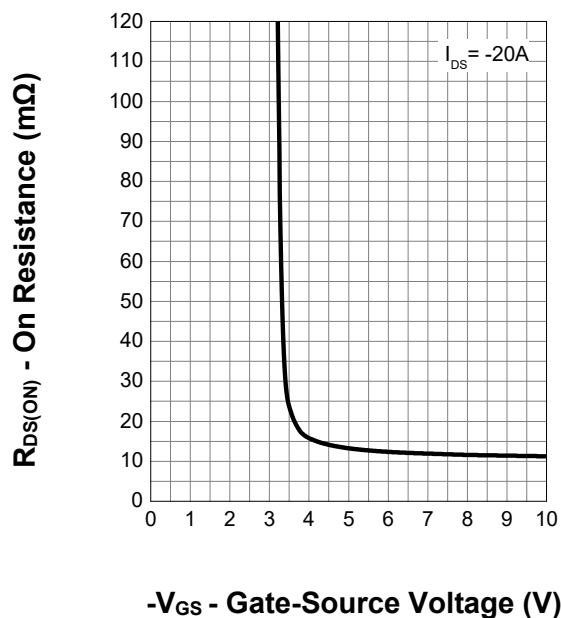


Gate Threshold Voltage

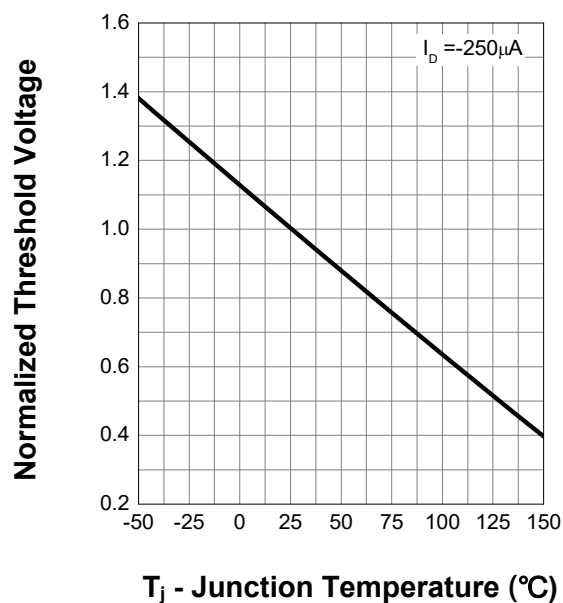


7. Typical Characteristics (cont.)


Drain-Source On Resistance

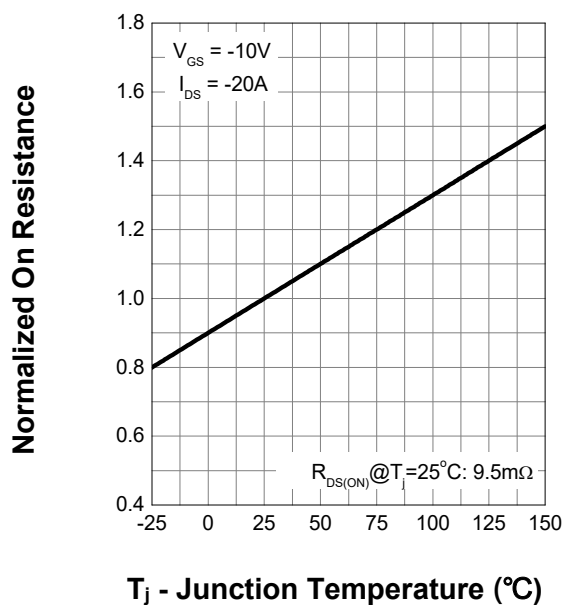


Body Diode Characteristics

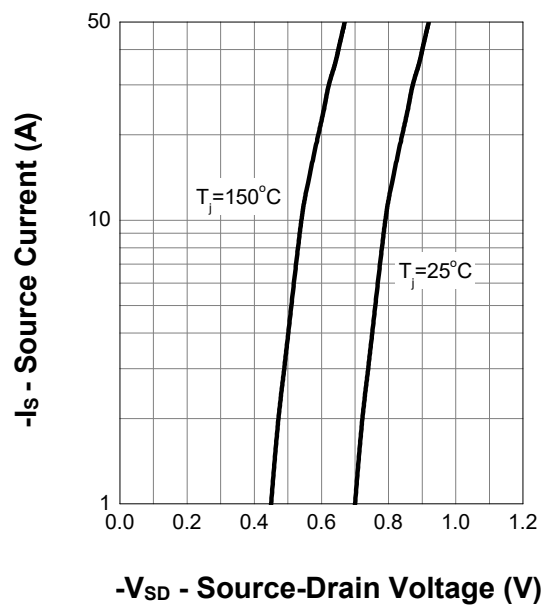

Capacitance

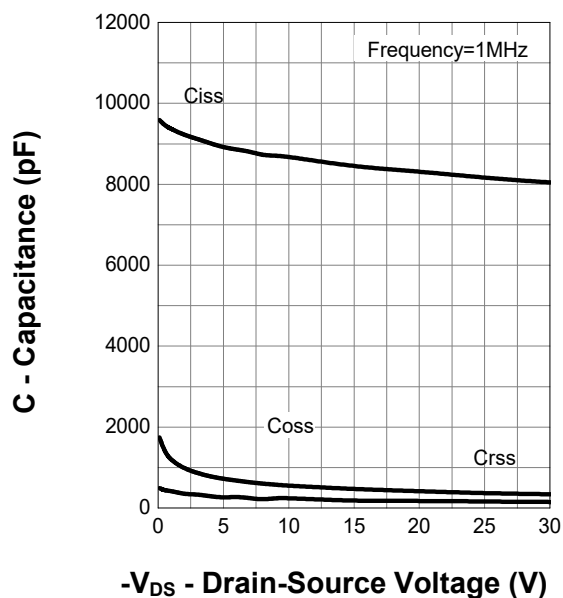


Gate Charge

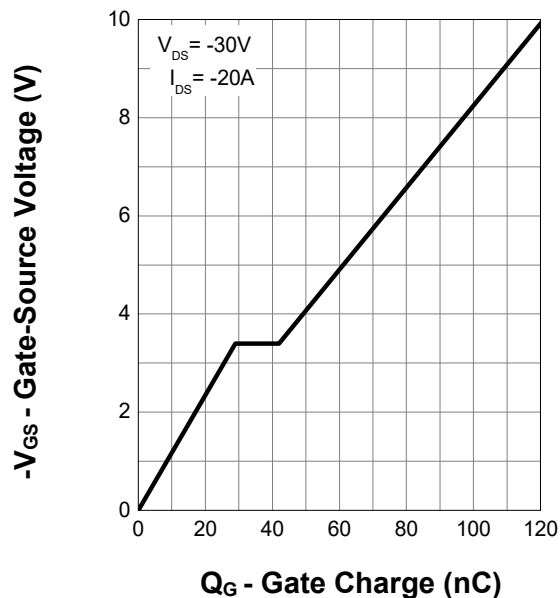

8. Package Dimensions

PDFN 5×6-8L Package

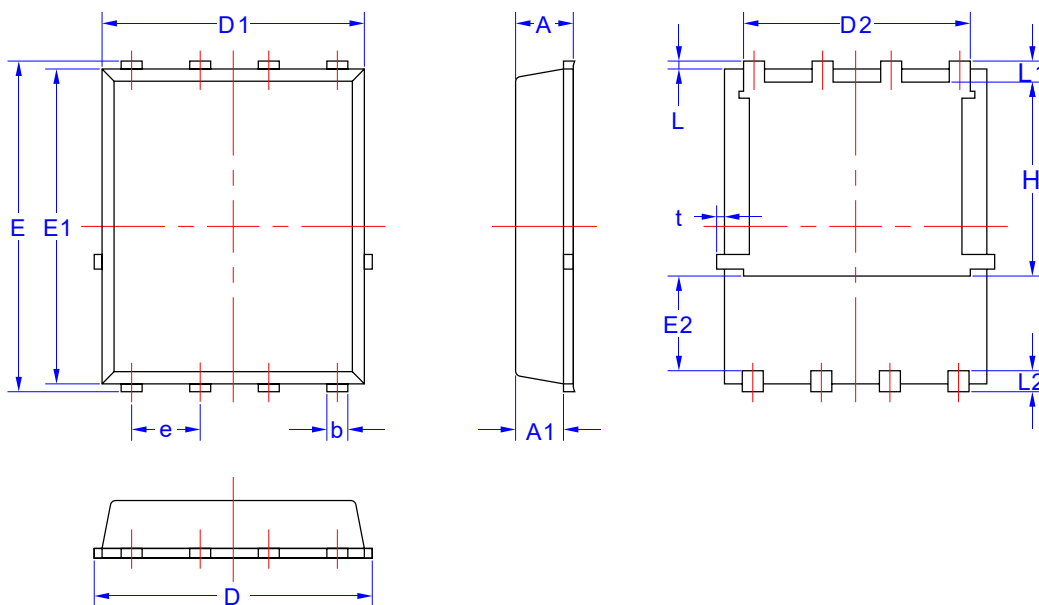

Symbol	Dimensions in Millimeters	
	MIN.	MAX
A	1.03	1.17
A1	0.824	0.97
b	0.34	0.48
D	4.80	5.40
D1	4.80	5.00
D2	4.11	4.31
E	5.95	6.15
E1	5.65	5.85
E2	1.40	-
e	1.27 BSC	
L	0.05	0.25
L1	0.38	0.50
L2	0.38	0.71
H	3.30	3.50
t	-	0.18