

N-Channel Enhancement Mode MOSFET

1. Product Information

1.1 Features

- ☑ Surface-mounted package
- ☑ Advanced trench cell design



1.2 Applications

- ☑ LCD TV appliances
- ☑ High power inverter system
- ☑ LCDM appliances

1.3 Quick reference

- ☑ $BV \geq 60\text{ V}$
- ☑ $R_{DS(ON)} \leq 2.0\text{ m}\Omega @ V_{GS} = 10\text{ V}$
- ☑ $P_{tot} \leq 300\text{ W}$
- ☑ $R_{DS(ON)} \leq 2.8\text{ m}\Omega @ V_{GS} = 6\text{ V}$
- ☑ $I_D \leq 229\text{ A}$

2. Pin Description

Pin	Description	Simplified Outline	Symbol
1,2,3	Source	 Top View LFPAK 5x6	
4	Gate		
Tab	Drain		

3. Limiting Values

Symbol	Parameter	Conditions	Min	Max	Unit
V _{DS}	Drain-Source Voltage	T _C =25°C	-	60	V
V _{GS}	Gate-Source Voltage	T _C =25°C	-	±20	V
I _D *	Drain Current	T _C =25°C, V _{GS} =10 V	-	229	A
		T _C =100°C, V _{GS} =10 V	-	162	A
I _{DM} *	Pulsed Drain Current	T _C =25°C, V _{GS} =10 V	-	640	A
P _{tot}	Drain Power Dissipation	T _C =25°C	-	300	W
T _J , T _{stg}	Operating Junction and Storage Temperature Range		-55	175	°C
I _S	Continuous-Source Current	T _C =25°C	-	229	A
I _{AS}	Single Pulsed Avalanche Current	V _{DD} =50 V, L=0.1 mH	-	98	A
E _{AS}	Single Pulsed Avalanche Energy	V _{DD} =50 V, L=1.0 mH	-	1512	mJ
R _{θJA} **	Thermal Resistance-Junction to Ambient		-	42	°C/W
R _{θJC} **	Thermal Resistance-Junction to Case		-	0.5	

Notes:

- * Pulse width ≤ 300 μs, duty cycle ≤ 2%
- ** Surface Mounted on 1 in² pad area, t ≤ 10 sec
- *** Limited by bonding wire

4. Marking Information

Product Name	Marking
KJ018N06LFH	018N06H XXXXXX

5. Ordering Code

Product Name	Package	Reel Size	Tape width	Quantity	Note
KJ018N06LFH	LFPAK5x6	-	-	5000	

Note: KUAJIEXIN defines "Green" as lead-free (RoHS compliant) and halogen free (Br or Cl does not exceed 900 ppm by weight in homogeneous material and total of Br and Cl does not exceed 1500 ppm by weight; Follow IEC 61249-2-21 and IPC/JEDEC J-STD-020C)

6. Electrical Characteristics (T_A=25°C Unless Otherwise Noted)


Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Static Characteristics						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0 V, I _{DS} =250 μA	60	-	-	V
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _{DS} =250 μA	2.0	-	4.0	V
I _{DSS}	Drain Source Current	V _{DS} =48 V, V _{GS} =0 V	-	-	1	μA
I _{GSS}	Gate Leakage Current	V _{GS} =±20 V, V _{DS} =0 V	-	-	±100	nA
R _{DS(ON)} ^a	On-State Resistance	V _{GS} =10 V, I _{DS} =50 A	-	1.8	2.0	mΩ
		V _{GS} =6 V, I _{DS} =30 A	-	2.5	2.8	
Diode Characteristics						
V _{SD} ^a	Diode Forward Voltage	I _{SD} =50 A, V _{GS} =0 V	-	-	1.3	V
t _{rr}	Reverse Recovery Time	I _{SD} =50 A, V _{GS} =0 V, dI _{SD} /dt=100 A/μs	-	22	-	ns
Q _{rr}	Reverse Recovery Charge		-	18	-	nC
Dynamic Characteristics ^b						
C _{iss}	Input Capacitance	V _{GS} =0 V, V _{DS} =30 V, Frequency=1 MHz	-	15321	-	pF
C _{oss}	Output Capacitance		-	545	-	
C _{rss}	Reverse Transfer Capacitance		-	94	-	
t _{d(on)}	Turn-on Delay Time	V _{DS} =30 V, V _{GEN} =10 V, R _G =3.9 Ω, R _L =0.6 Ω, I _{DS} =50 A	-	25	-	ns
t _r	Turn-on Rise Time		-	113	-	
t _{d(off)}	Turn-off Delay Time		-	198	-	
t _f	Turn-off Fall Time		-	122	-	
Gate Charge Characteristics ^b						
Q _g	Total Gate Charge	V _{DS} =30 V, V _{GS} =10 V, I _{DS} =50 A	-	254	-	nC
Q _{gs}	Gate-Source Charge		-	59	-	
Q _{gd}	Gate-Drain Charge		-	31	-	

Notes:


- Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%
- Guaranteed by design, not subject to production testing

7. Typical Characteristics


Power Capability

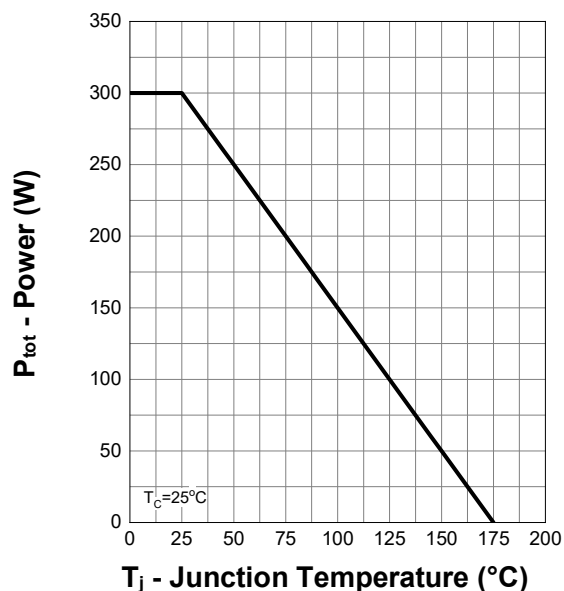


Current Capability

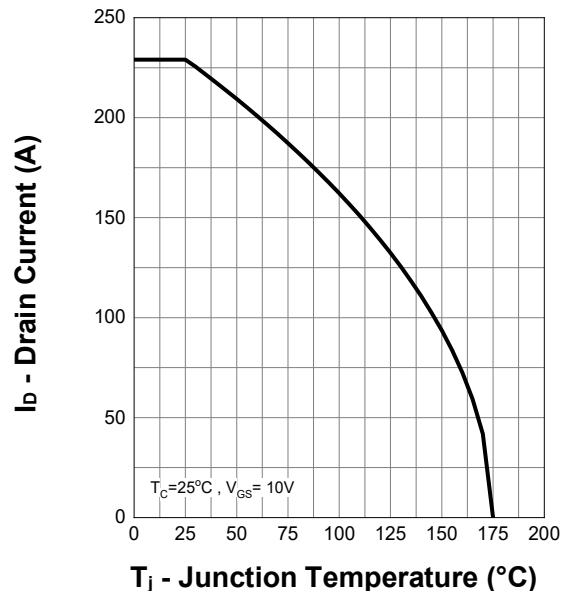

Safe Operating Area

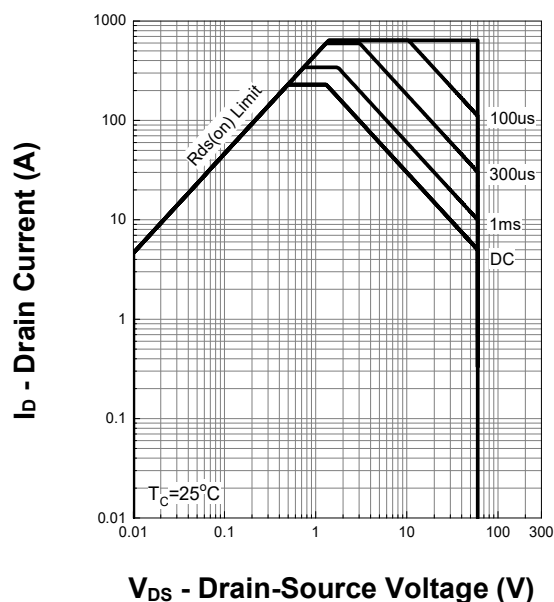


Transient Thermal Impedance

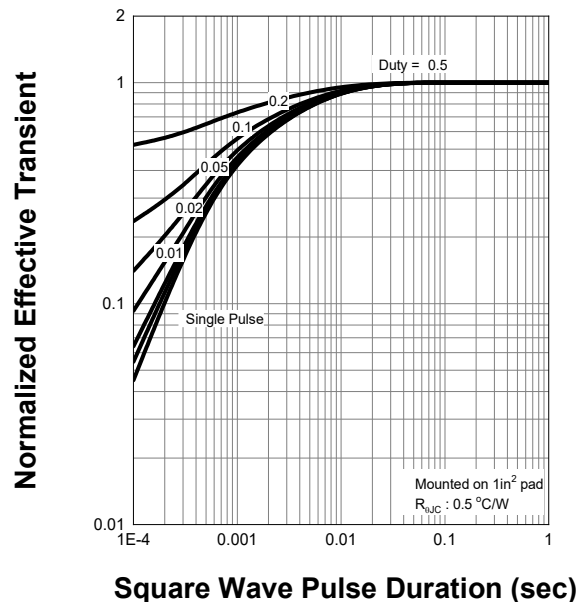


7. Typical Characteristics (Cont.)


Output Characteristics

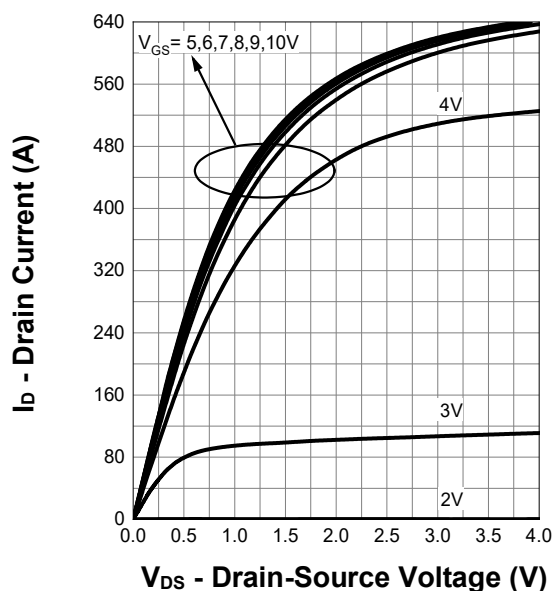


On Resistance

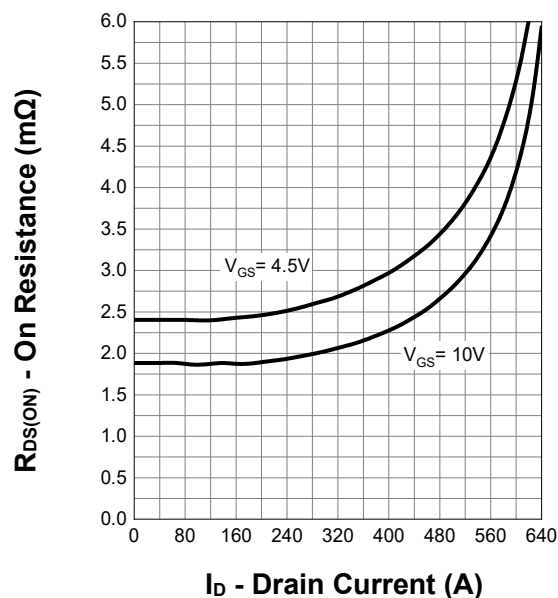





Transfer Characteristics

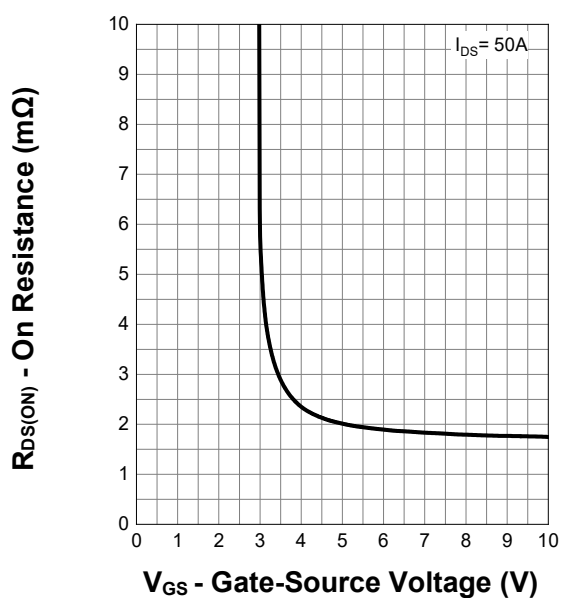

Normalized Threshold Voltage

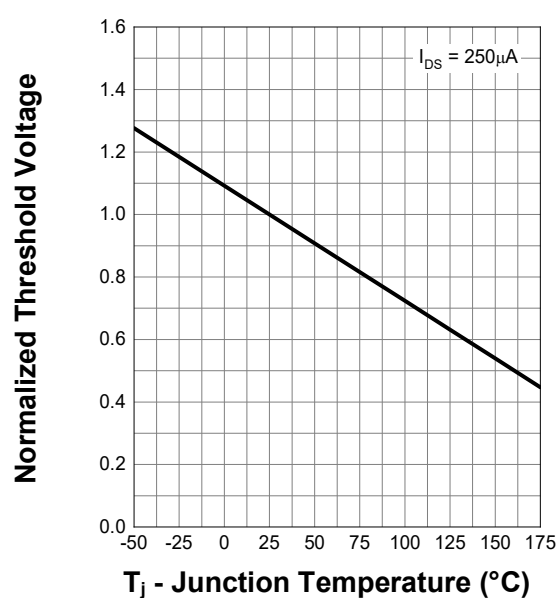


7. Typical Characteristics (Cont.)

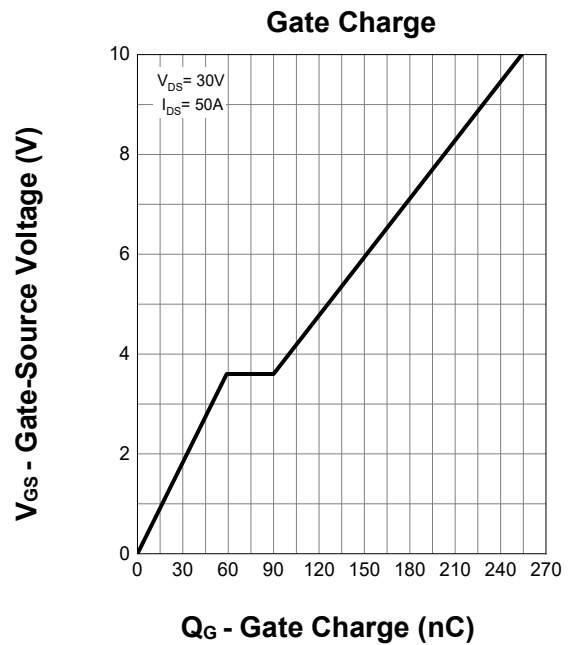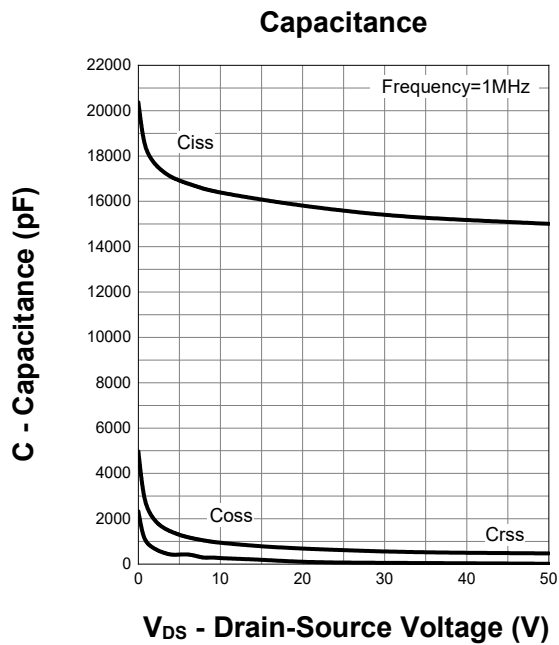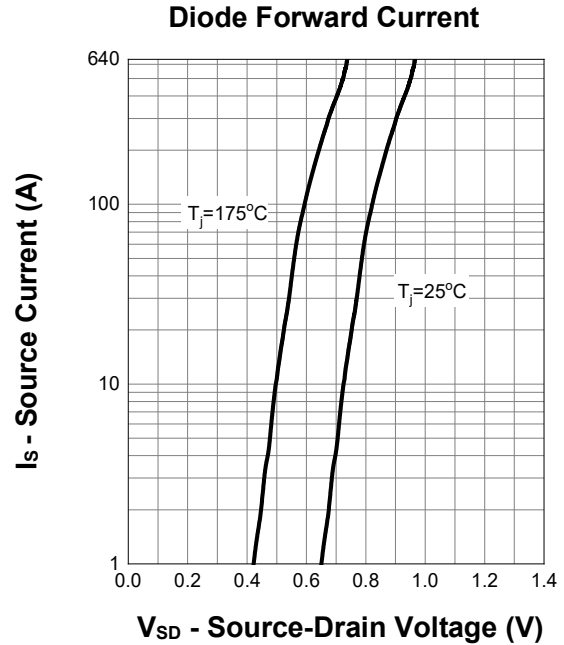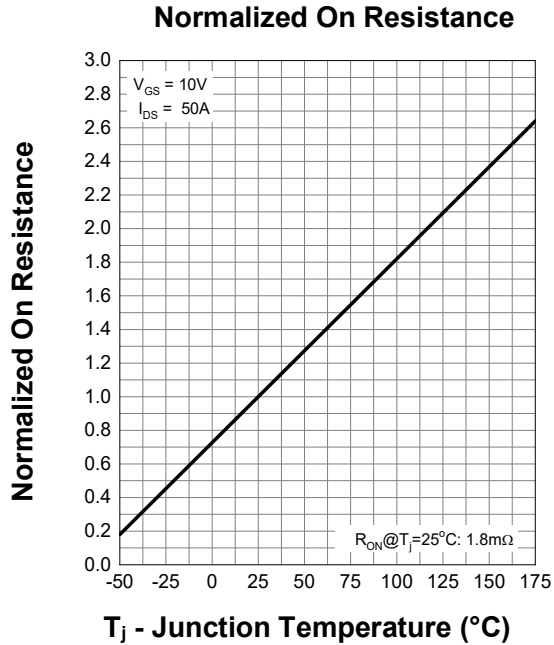

8. Package Dimensions

LFAK 5x6 Package

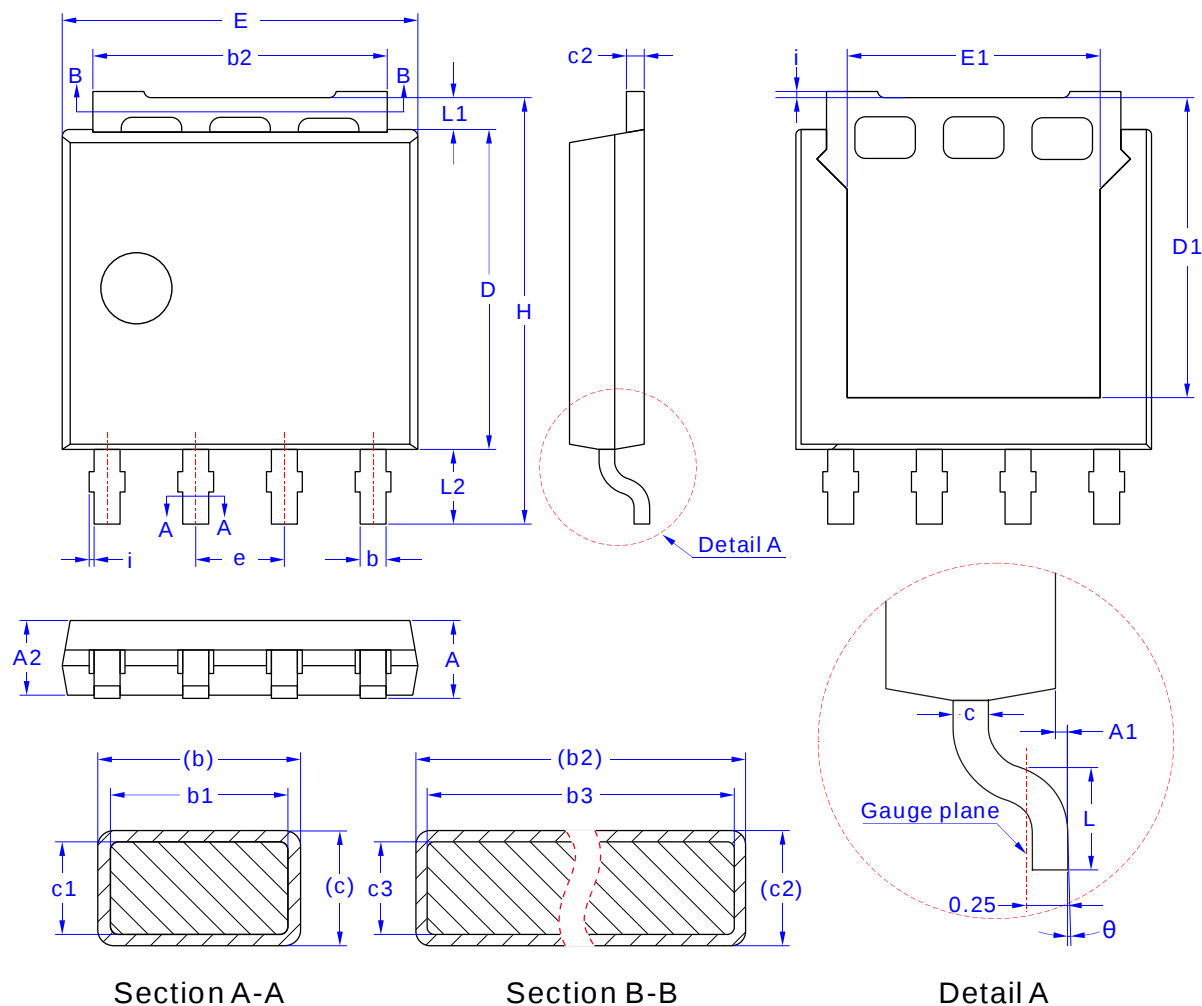

Symbol	Dimensions in Millimeters	
	MIN.	MAX.
A	1.00	1.30
A1	0	0.15
A2	0.98	1.12
b	0.35	0.50
b1	0.32	0.46
b2	4.02	4.41
b3	4.00	4.37
c	0.19	0.25
c1	0.17	0.23
c2	0.24	0.30
c3	0.22	0.28

Symbol	Dimensions in Millimeters	
	MIN.	MAX.
D	4.45	4.70
D1	-	4.45
E	4.95	5.30
E1	3.50	3.70
e	1.27 BSC	
H	5.95	6.25
i	-	0.25
L	0.40	0.85
L1	0.27	0.57
L2	0.80	1.30
θ	0°	8°