

N-Channel Enhancement Mode MOSFET

1. Product Information

1.1 Features

- ☒ SGT Technology
- ☒ Low $F_{OM} R_{DS(ON)} \times Q_{gd}$



1.2 Applications

- ☒ PWM Application
- ☒ Power Management
- ☒ Load Switch

1.3 Quick reference

- ☒ $BV \geq 60\text{ V}$
- ☒ $R_{DS(ON)} \leq 5.5\text{ m}\Omega @ V_{GS} = 10\text{ V}$
- ☒ $P_D \leq 69\text{ W}$
- ☒ $I_D \leq 90\text{ A}$

2. Pin Description

Pin	Description	Simplified Outline	Symbol
1,2,3	Source	 Top View PDFN5x6-8L	
4	Gate		
5,6,7,8	Drain		

3. Limiting Values

Symbol	Parameter	Conditions	Min	Max	Unit
V _{DS}	Drain-Source Voltage	T _C =25°C	60	-	V
V _{GS}	Gate-Source Voltage	T _C =25°C	-	±20	V
I _D *, **	Drain Current (DC)	T _C =25°C, V _{GS} =10 V	-	90	A
		T _C =100°C, V _{GS} =10 V	-	70	A
I _{DM} *	Pulsed Source Current	T _C =25°C, V _{GS} =10 V	-	270	A
P _D	Power Dissipation	T _C =25°C	-	69	W
E _{AS} *	Single Pulsed Avalanche Energy	V _{DD} =30 V, L=0.5 mH	-	313	mJ
T _J , T _{stg}	Operating Junction and Storage Temperature Range		-55	150	°C
R _{θJA} **	Thermal Resistance-Junction to Ambient		-	60	°C/W
R _{θJC}	Thermal Resistance-Junction to Case		-	1.8	

Notes:

- * Pulse width ≤ 300 μs, duty cycle ≤ 2%.
- ** Surface mounted on 1 in² pad area, t ≤ 10 sec.
- *** Limited by maximum junction temperature.

4. Marking Information

Product Name	Marking
KJ0506GH	KJ0506GH XXXXXX

5. Ordering Code

Product Name	Package	Reel size	Tape width	Quantity (pcs)
KJ0506GH	PDFN 5x6-8L	13"	12 mm	5000

Note: KUAIJIEXIN defines "Green" as lead-free (RoHS compliant) and halogen free (Br or Cl does not exceed 900 ppm by weight in homogeneous material and total of Br and Cl does not exceed 1500 ppm by weight; Follow IEC 61249-2-21 and IPC/JEDEC J-STD-020C).

6. Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Static Characteristics						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0 V, I _{DS} =250 μA	60	-	-	V
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _{DS} =250 μA	2	-	4	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =48 V, V _{GS} =0 V	-	-	1	μA
I _{GSS}	Gate Leakage Current	V _{DS} =0 V, V _{GS} =±20 V	-	-	±100	nA
R _{DS(ON)} ^a	On-State Resistance	V _{GS} =10 V, I _{DS} =20 A	-	4.5	5.5	mΩ
R _g	Gate Resistance	Frequency=1.0 MHz	-	2.3	-	Ω
Diode Characteristics						
V _{SD} ^a	Diode Forward Voltage	I _{SD} =20 A, V _{GS} =0 V	-	-	1.2	V
t _{rr}	Reverse Recovery Time	I _{DS} =20 A, V _{GS} =0V, dI _{SD} /dt=100 A/μs	-	38	-	ns
Q _{rr}	Reverse Recovery Charge		-	26	-	nC
Dynamic Characteristics ^b						
C _{iss}	Input Capacitance	V _{GS} =0 V, V _{DS} =30 V, Frequency=1.0 MHz	-	1480	-	pF
C _{oss}	Output Capacitance		-	940	-	
C _{rss}	Reverse Transfer Capacitance		-	103	-	
t _{d(on)}	Turn-on Delay Time	V _{DS} =30 V, V _{GEN} =10 V, R _G =6 Ω, I _{DS} =20 A	-	13	-	ns
t _r	Turn-on Rise Time		-	25	-	
t _{d(off)}	Turn-off Delay Time		-	29	-	
t _f	Turn-off Fall Time		-	9	-	
Gate Charge Characteristics ^b						
Q _g	Total Gate Charge	V _{DS} =30 V, V _{GS} =0 to 10 V, I _{DS} =20 A	-	22	-	nC
Q _{gs}	Gate-Source Charge		-	11	-	
Q _{gd}	Gate-Drain Charge		-	5	-	

Notes:

- Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%.
- Guaranteed by design, not subject to production testing.

7. Typical Characteristics

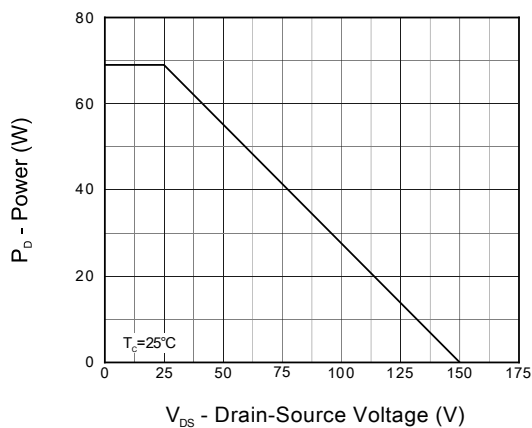


Figure 1. Output Characteristics

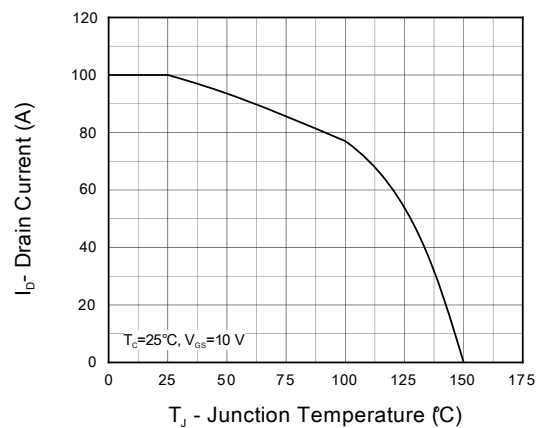


Figure 2. Current Capability

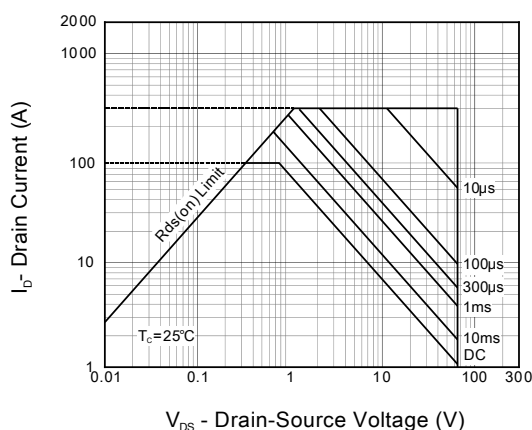


Figure 3. Safe Operation Area

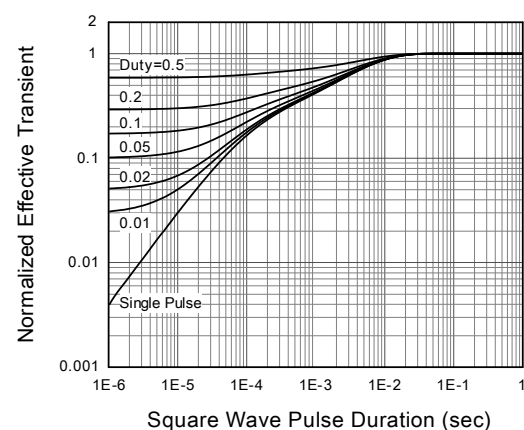


Figure 4. Transient Thermal Impedance

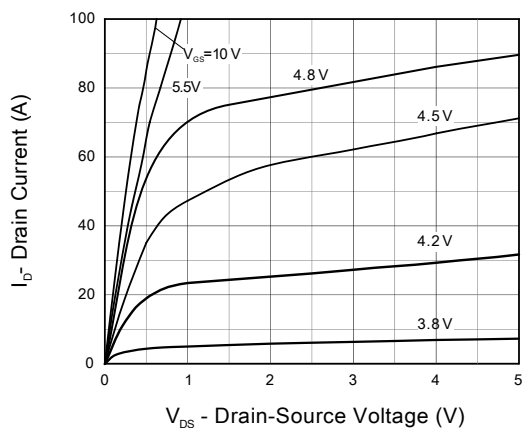


Figure 5. Output Characteristics

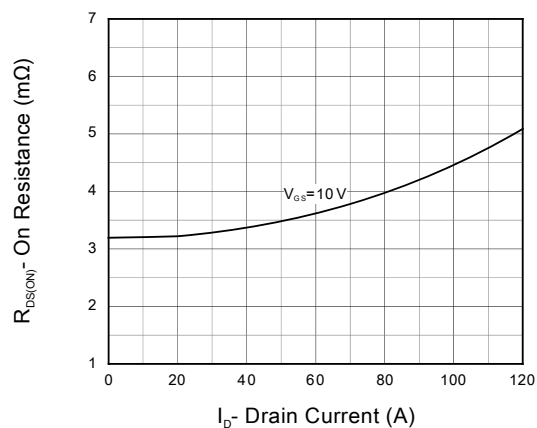


Figure 6. On Resistance

7. Typical Characteristics (cont.)

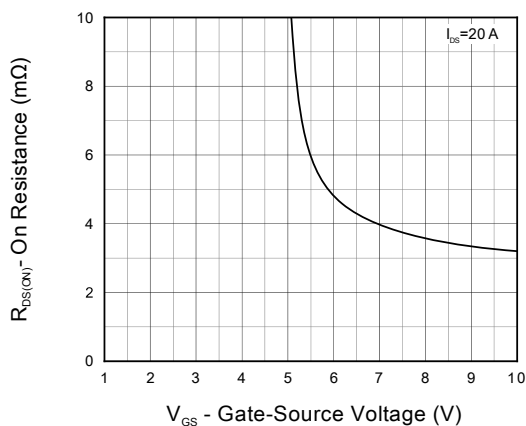


Figure 7. Transfer Characteristics

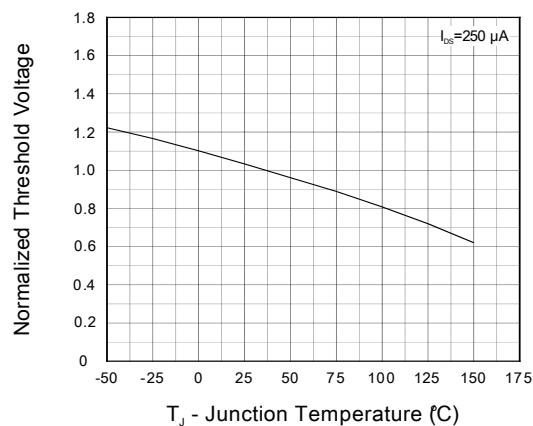


Figure 8. Normalized Threshold Voltage

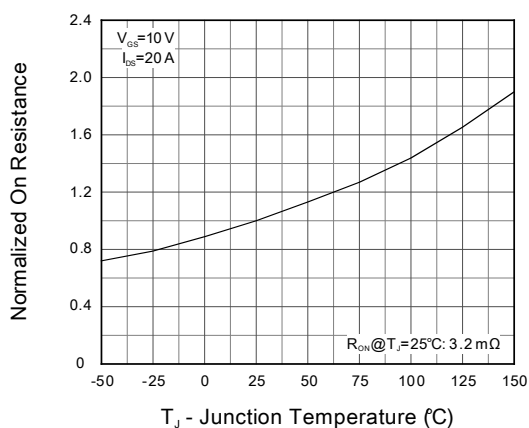


Figure 9. Normalized On Resistance

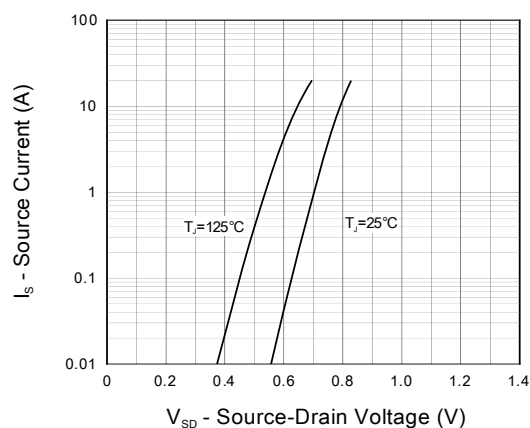


Figure 10. Diode Forward Current

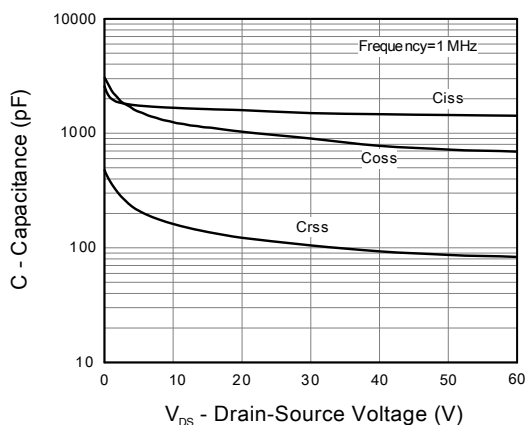


Figure 11. Capacitance


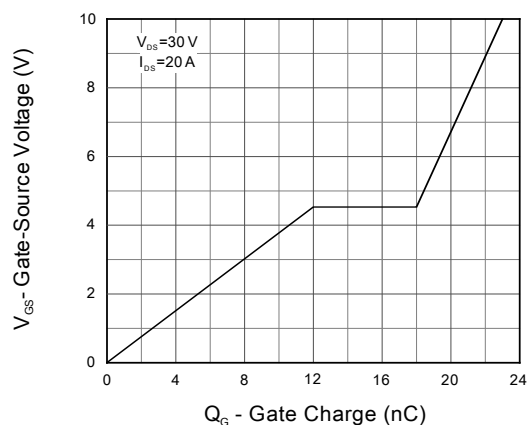


Figure 12. Gate Charge

8. Package Dimensions

PDFN5x6-8L Package

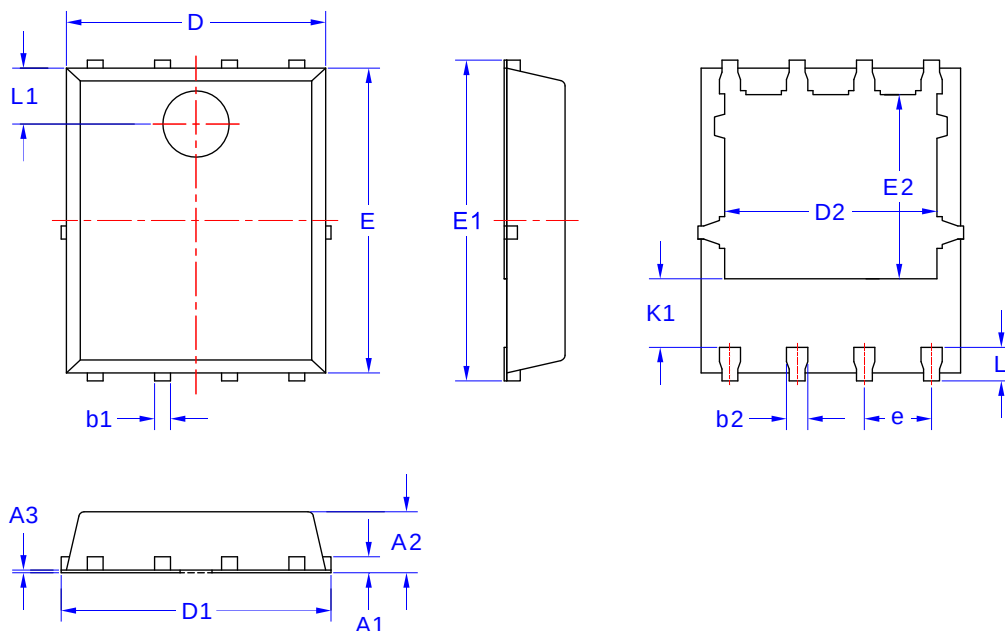

Symbol	Dimensions in Millimeters		
	MIN	NOM	MAX
A1		0.254 BSC	
A2	1.000	1.100	1.200
A3	0.005		0.020
b1	0.250	0.300	0.350
b2	0.350	0.400	0.450
D	4.800	4.900	5.000
D1	5.000	5.100	5.200
D2	3.910	4.010	4.110
E	5.650	5.750	5.850
E1	5.950	6.050	6.150
E2	3.375	3.475	3.575
e		1.270 TYPE	
K		0.600 REF	
K1		1.235 REF	
L	0.530	0.630	0.730
L1		1.000 REF	