

N-Channel Enhancement Mode MOSFET

1. Product Information

1.1 Features

- ☒ Advanced trench cell design
- ☒ Low Thermal Resistance
- ☒ MSL1



1.2 Applications

- ☒ Motor drivers
- ☒ DC/DC converter

1.3 Quick reference

- ☒ $BV \geq 60\text{ V}$
- ☒ $P_D \leq 156\text{ W}$
- ☒ $I_D \leq 180\text{ A}$
- ☒ $R_{DS(ON)} \leq 2.5\text{ m}\Omega @ V_{GS} = 10\text{ V}$

2. Pin Description

Pin	Description	Simplified Outline	Symbol
1	Gate(G)	 Top View TO-263-7L	
2, 3	Source(S)		
4	Drain(D)		
5, 6, 7	Source(S)		

3. Limiting Values

Symbol	Parameter	Conditions	Min	Max	Unit
V_{DS}	Drain-Source Voltage	$T_C=25^{\circ}\text{C}$	60	-	V
V_{GS}	Gate-Source Voltage	$T_C=25^{\circ}\text{C}$	-	± 20	V
I_D	Drain Current (DC)	$T_C=25^{\circ}\text{C}, V_{GS}=10\text{ V}$	-	180	A
		$T_C=100^{\circ}\text{C}, V_{GS}=10\text{ V}$	-	114	A
I_{DM}^*	Drain Current (Pulsed)	$T_C=25^{\circ}\text{C}, V_{GS}=10\text{ V}$	-	720	A
P_D	Drain power dissipation	$T_C=25^{\circ}\text{C}$	-	156	W
E_{AS}	Single Pulsed Avalanche Energy	$V_{DD}=50\text{ V}, L=0.5\text{ mH}$	-	1276	mJ
T_J, T_{stg}	Operating Junction and Storage Temperature Range		-55	150	$^{\circ}\text{C}$
$R_{\theta JA}$	Thermal Resistance-Junction to Ambient		-	62.5	$^{\circ}\text{C/W}$
$R_{\theta JC}$	Thermal Resistance-Junction to Case		-	0.8	

Notes:

* Surface mounted on 1 in² pad area, $t \leq 10\text{ sec}$.

** Pulse width $\leq 300\text{ }\mu\text{s}$, duty cycle $\leq 2\%$.

*** Limited by bonding wire.

4. Marking Information

Product Name	Marking
KJ025N06D7	KJ025N06D7 HYWWXX XXXXXX-X

5. Ordering Code

Product Name	Package	Reel size	Tape width	Quantity (pcs)
KJ025N06D7	TO-263-7L	13"	24 mm	800

Note: KUAJIEXIN defines "Green" as lead-free (RoHS compliant) and halogen free (Br or Cl does not exceed 900 ppm by weight in homogeneous material and total of Br and Cl does not exceed 1500 ppm by weight; Follow IEC 61249-2-21 and IPC/JEDEC J-STD-020C).

6. Electrical Characteristics (T_A=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Static Characteristics						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0 V, I _{DS} =250 μA	60	-	-	V
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _{DS} =250 μA	1.2	1.8	2.5	V
I _{DSS}	Drain Leakage Current	V _{DS} =60 V, V _{GS} =0 V	-	-	1	μA
I _{GSS}	Gate Leakage Current	V _{GS} =±20 V, V _{DS} =0 V	-	-	±100	nA
R _{DS(ON)}	Drain-Source On-State Resistance	V _{GS} =10 V, I _{DS} =40 A	-	2	2.5	mΩ
Diode Characteristics						
V _{SD}	Diode Forward Voltage	I _{SD} =40 A, V _{GS} =0 V	-	-	1.2	V
t _{rr}	Reverse Recovery Time	I _{SD} =40 A, V _{GS} =0 V, dI _{SD} /dt=100 A/μs	-	65	-	ns
Q _{rr}	Reverse Recovery Charge		-	92	-	nC
Dynamic Characteristics						
C _{iss}	Input Capacitance	V _{GS} =0 V, V _{DS} =30 V, Frequency=1 MHz	-	4800	-	pF
C _{oss}	Output Capacitance		-	1320	-	
C _{rss}	Reverse Transfer Capacitance		-	50	-	
t _{d(on)}	Turn-on Delay Time	V _{DS} =30 V, V _{GEN} =10 V, R _G =2 Ω, I _{DS} =40 A	-	23	-	ns
t _r	Turn-on Rise Time		-	7	-	
t _{d(off)}	Turn-off Delay Time		-	81	-	
t _f	Turn-off Fall Time		-	27	-	
Gate Charge Characteristics						
Q _g	Total Gate Charge	V _{DS} =30 V, V _{GS} =10 V, I _{DS} =40 A	-	66	-	nC
Q _{gs}	Gate-Source Charge		-	11	-	
Q _{gd}	Gate-Drain Charge		-	11	-	

7. Typical Characteristics

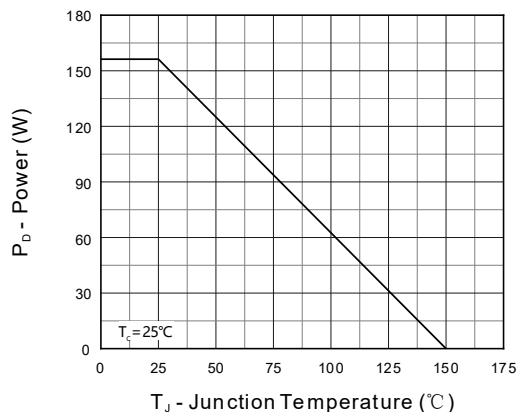


Figure 1. Power Capability

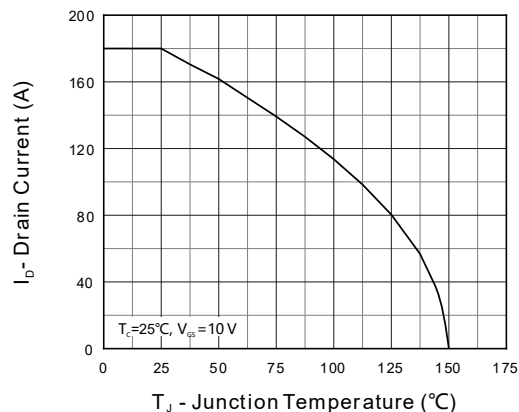


Figure 2. Current Capability

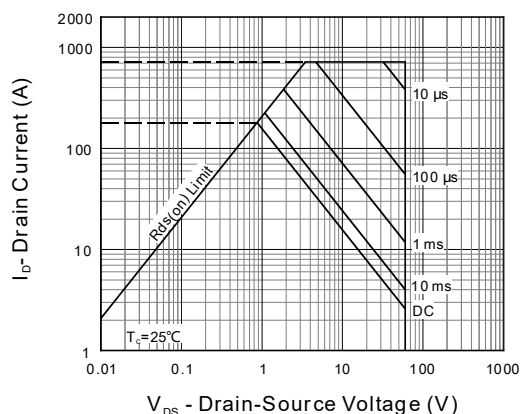


Figure 3. Safe Operation Area

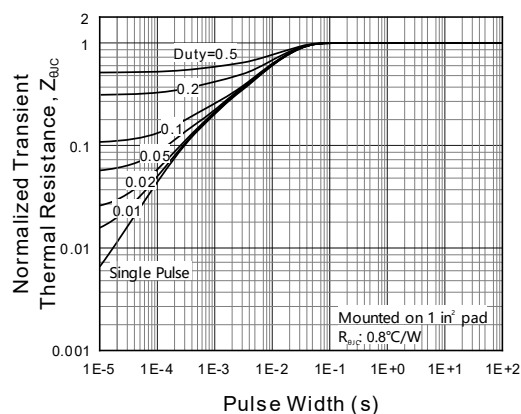


Figure 4. Transient Thermal Impedance

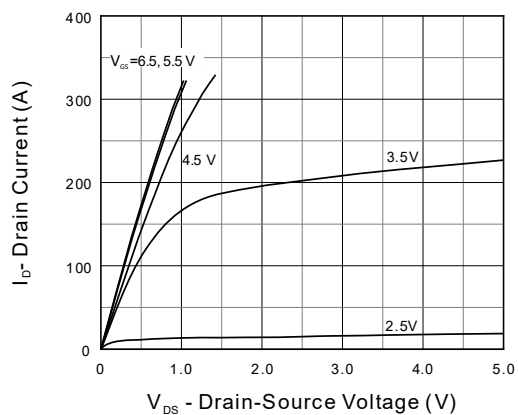


Figure 5. Output Characteristics

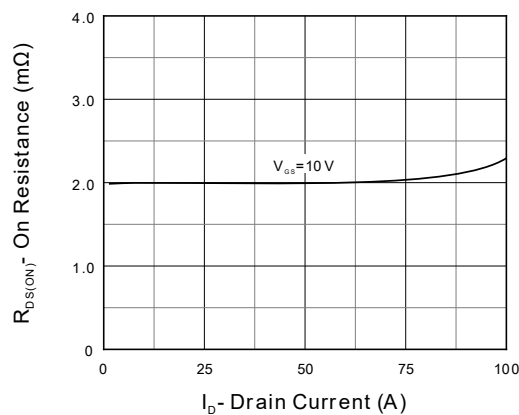


Figure 6. On Resistance

7. Typical Characteristics (cont.)

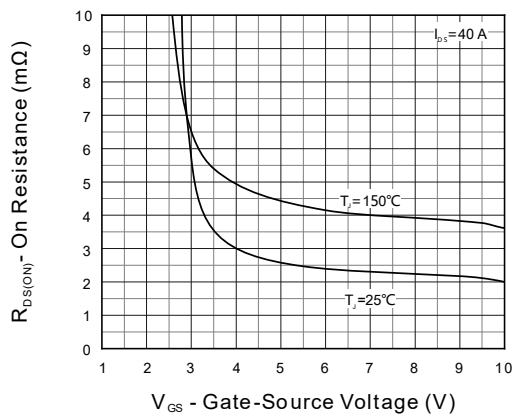


Figure 7. $R_{DS(ON)}$ vs. V_{GS}

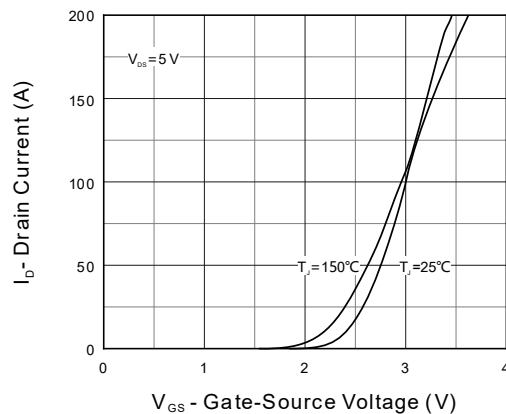


Figure 8. Transfer Characteristics

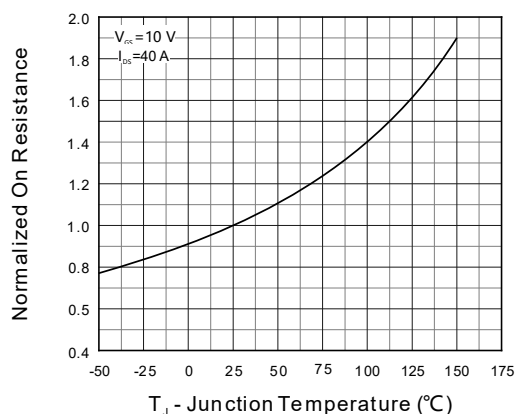


Figure 9. Normalized On Resistance

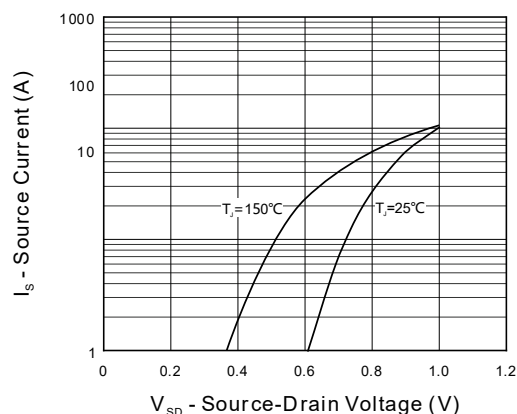


Figure 10. Diode Forward Current

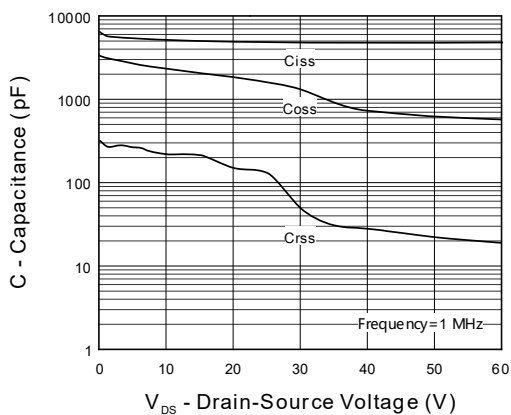


Figure 11. Capacitance


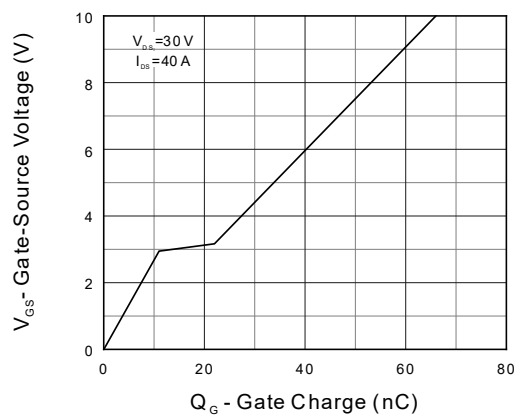


Figure 12. Gate Charge

8. Package Dimensions

TO-263-7L Package

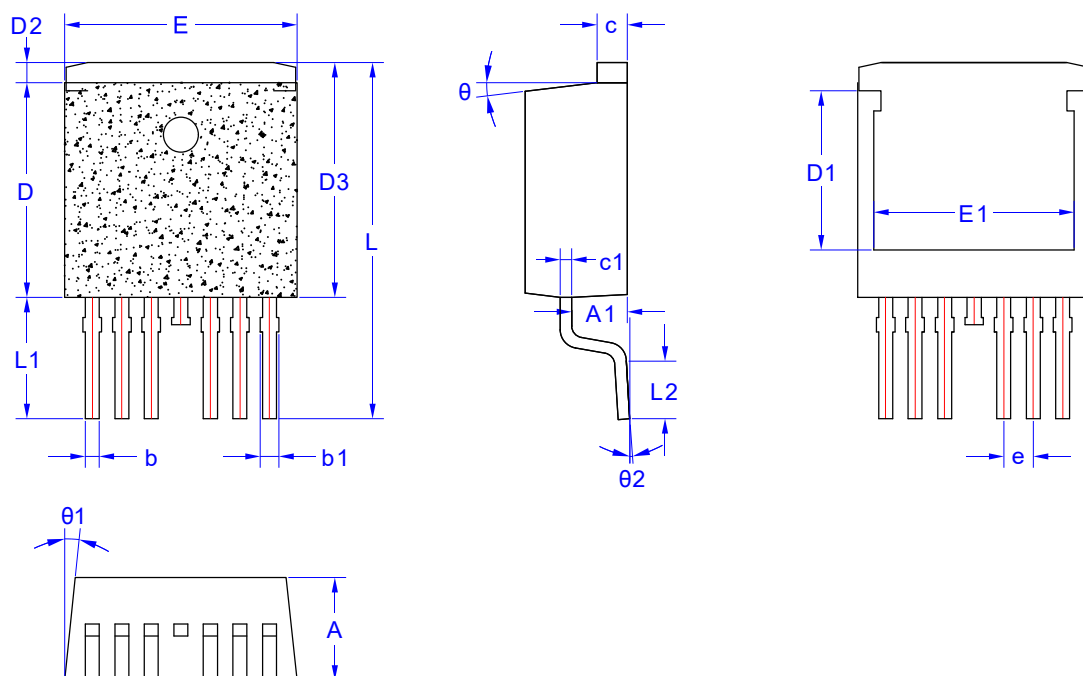

Symbol	Dimensions in Millimeters		
	MIN	NOM	MAX
A	4.20	4.40	4.60
A1	2.30	2.40	2.50
b	0.50	0.60	0.70
b1	0.60	0.70	0.80
c	1.25	1.30	1.35
c1	0.45	0.50	0.55
D	9.05	9.25	9.45
D1	6.65	6.85	7.05
D2	0.65	0.85	1.05
D3	9.90	10.10	10.30
E	9.80	10.00	10.20
E1	8.50	8.60	8.70
e		1.27 BSC	
L	14.90	15.10	15.40
L1	4.80	5.00	5.20
L2	2.30	2.50	2.70
θ	5°	7°	10°
$\theta 1$	3°	5°	8°
$\theta 2$	0°	-	8°